

FCI P/N
54200-213-XXX-XX

54200-213-XXX-XX

FERRULE (XXX)






- 102 SINGLEMODE: 126 μ m+1/-0
CONCENTRICITY: 1 μ m
- 103 SINGLEMODE: 126 μ m+1/-0
CONCENTRICITY: 1 μ m
- 201 MULTIMODE: 127 μ m
- 203 MULTIMODE: 144 μ m
- 299 OTHER

BOOT TYPE (X)

- 1 3.0mm CABLE STANDARD BOOT (SLOTTED TYPE)
- 2 1.0mm FIBER (BUFFER) BOOT
- 3 2.0mm FIBER BOOT
- 4 3.0mm CABLE SHORT BOOT
- 5 2.4mm CABLE SHORT BOOT
- 6 2.0mm CABLE SHORT BOOT
- 7 3.0mm CABLE LONG BOOT (BELLCORE TYPE)
- 8 1.0mm FIBER (BUFFER) LONG BOOT (SLOTTED TYPE)
- 9 2.0mm CABLE STANDARD BOOT (SLOTTED TYPE)
- A 2.0mm CABLE LONG BOOT (BELLCORE TYPE)
- 0 OTHER

BOOT COLOR (X)

- 1 BLUE
- 2 BLACK
- 3 GREEN
- 4 RED
- 5 GRAY
- 6 YELLOW
- 7 WHITE
- 8 BEIGE
- 9 CUSTOM

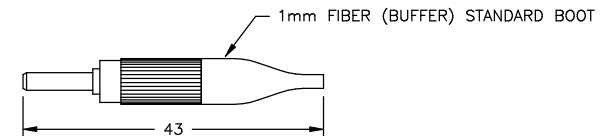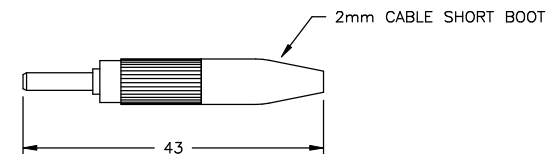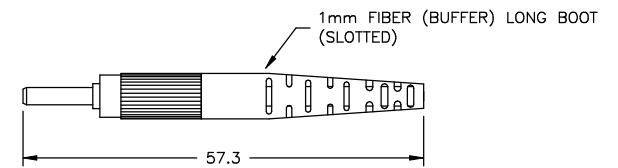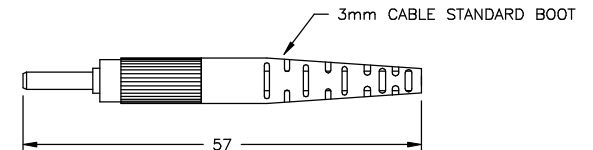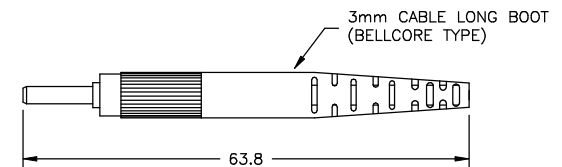

CONNECTION LOSS:

INSERTION LOSS

0.15 dB OR BETTER TYPICAL FOR MULTIMODE
0.10 dB OR BETTER TYPICAL FOR SINGLEMODE

RETURN LOSS

55dB OS BETTER TYPICAL (SINGLEMODE, PC POLISH)

DURABILITY:

<0.1 dB CHANGE TYPICAL
OPERATING TEMPERATURE
-40 TO +75 °C

RECOMMENDED VENDER:

SENKO

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 Electronics FCI www.fciconnect.com			
ltr	ecn no	dr	date	linear	NOMINALS ONLY	projection		title			
A	V12324	JRW	10/24/01		UNLESS NOTED			CON, DIN			
				angles							
				dr	J. WITMER 10/24/01	MM		product family FIBER OPTICS			
				enrg	SEAN CLARK 10/24/01			size dwg no			
				chr	SEAN CLARK 10/24/01	scale		A4 54200			
				appd	SEAN CLARK 10/24/01	1:1		code 213			
sheet index	revision sheet	A	1					sheet 1 of 1			
								cage code 22526			