

3.3Vdc HCMOS/TTL SMD CRYSTAL CLOCK OSCILLATOR



7.0 x 5.0 x 1.6mm



ASV1 SERIES

FEATURES:

- Low profile package at 1.6mm
- Leadless Chip Carrier (LCC)
- HCMOS/TTL Compatible, 3.3Vdc, 2.5Vdc, & 1.8Vdc options
- Reflow capable, Seam Sealed Package

APPLICATIONS:

- Clock signaling for μ Processors, PC Motherboards and Graphic Cards
- High output drive capability (up to 50pf)

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	ASV1 Series
Frequency Range	0.500 MHz to 200.000 MHz
Operating Temperature	-10° C to + 70° C (see options)
Storage Temperature	- 55° C to + 125° C
Overall Frequency Stability	\pm 100 ppm max. (see options)
Supply Voltage (Vdd)	3.3 Vdc \pm 10%
Input Current	See Table 1
Symmetry	40/60 % max.@ 1/2Vdd (see options)
Rise time / Fall time (Tr/Tf)	See Table 1
Output Load	15pF (10TTL); 50pF max.
Output Voltage	VOH = 0.9 * Vdd min.; VOL = 0.4 Vdc max.
Start-up Time	10ms max.
Tristate Function (see Tri-state option)	"1" (VIH \geq 0.7 Vdc) or open: Oscillation "0" (VIL < 0.3 Vdc) : Hi Z
Disable Current (with Power Down)	10 μ A max.
Disable Current (without Power Down)	200 μ A (Option A)
Enable Time (with Power Down)	400ms max.
Enable Time (without Power Down)	100ns (Option A)
Disable Time (with Power Down)	100ns
Disable Time (without Power Down)	100ns (Option A)
Aging at 25°C/year	\pm 5 ppm max.
Period Jitter one sigma	1 to 5ps typ. (frequency dependent)


Table 1

Frequency	Idd (max)	Tr/Tf (max)
0.5 ~ 30.0MHz	15mA	10ns
30.01 ~ 70.0MHz	35mA	7ns
70.01~125.0MHz	45mA	7ns
125.01 ~ 165MHz	65mA	5ns

Please contact Abracon for higher frequencies

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

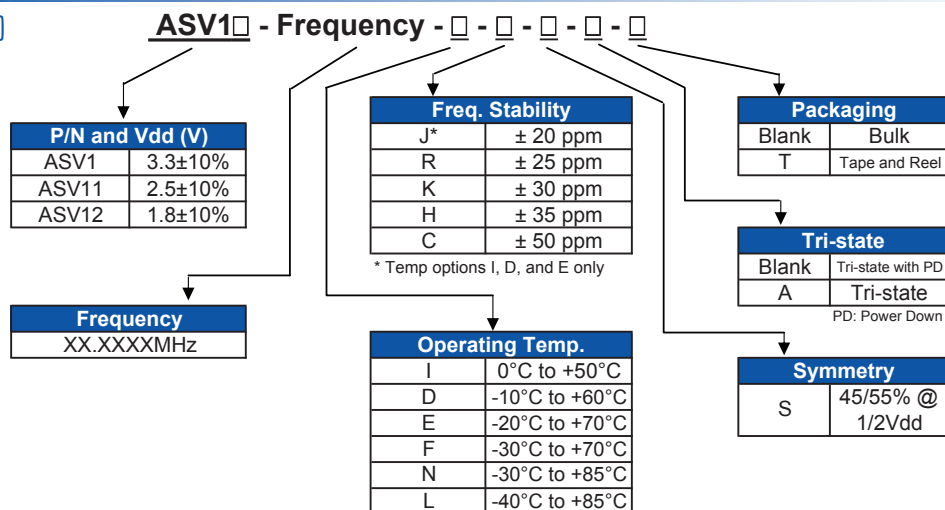

3.3Vdc HCMOS/TTL SMD CRYSTAL CLOCK OSCILLATOR



ASV1


7.0 x 5.0 x 1.6mm




RoHS
Compliant

ASV1 SERIES

OUTLINE DRAWING:

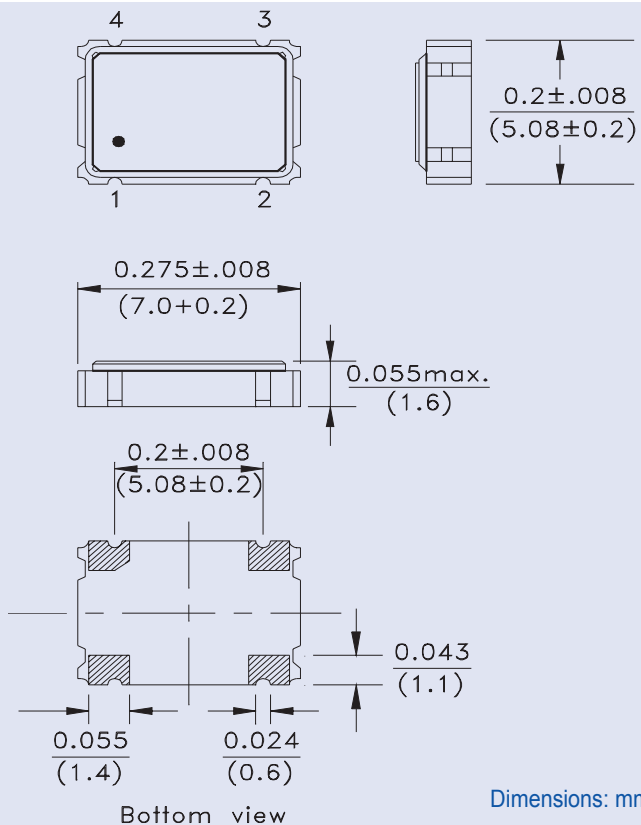

Recommended land pattern


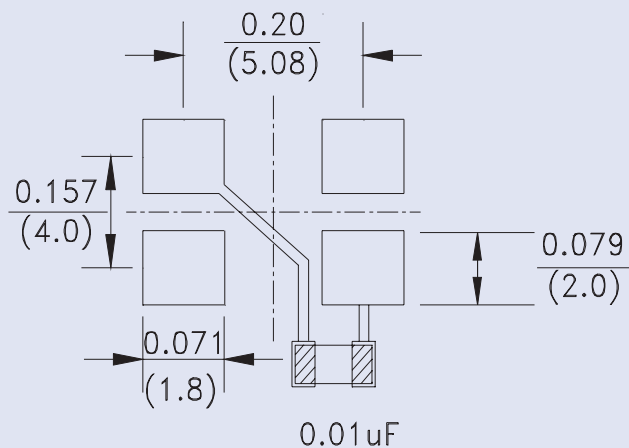


PIN	FUNCTION
1	Tristate Enable/Disable
2	GND/Case
3	Output
4	Vdd

Note: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and 4.

TAPE & REEL: T = Tape and reel 1,000pcs/reel

REFLOW PROFILE:

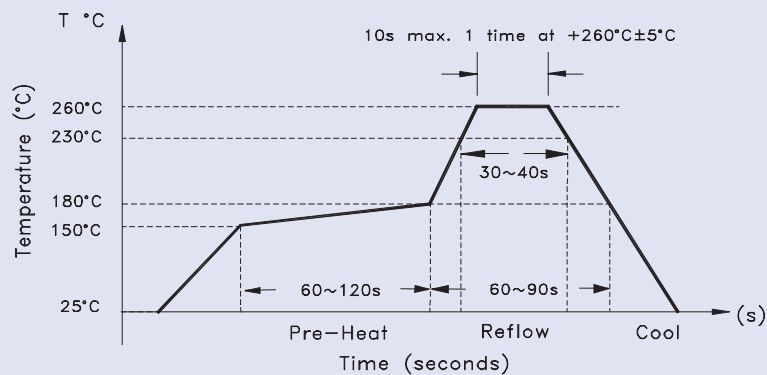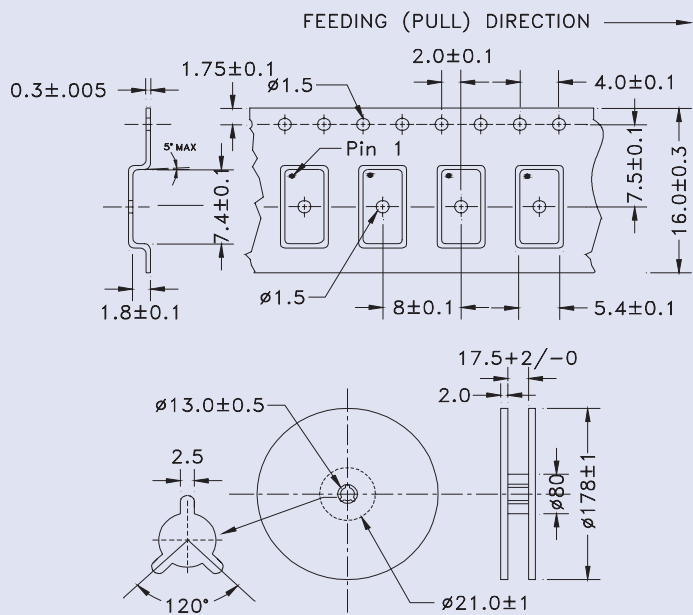

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.24.09**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com