

B08

FEMALE HEADER

PROFILE : 8.5mm STRAIGHT

PITCH: 2.54mm

MATERIAL

INSULATOR - PBT (UL 94V-0)

CONTACT - COPPER ALLOY

SPECIFICATIONS

CURRENT RATING

1 AMP DC

CONTACT RESISTANCE

30 MILLIOHM MAX.

INSULATION RESISTANCE


1000 MEGOHM MIN.

DIELECTRIC VOLTAGE





500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

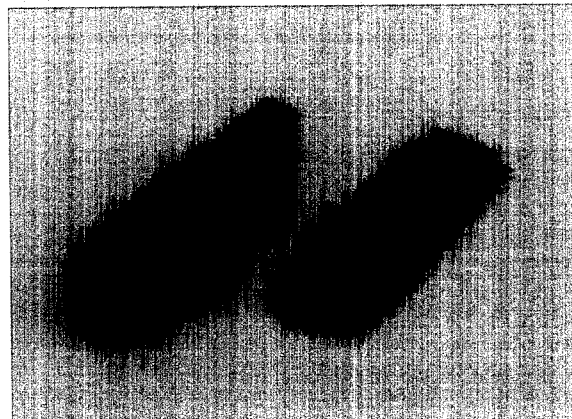

B

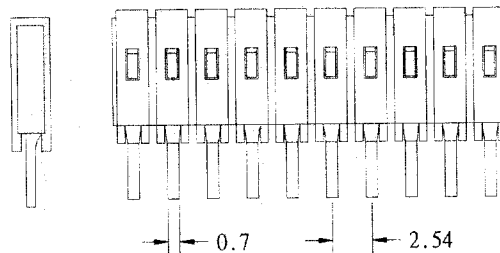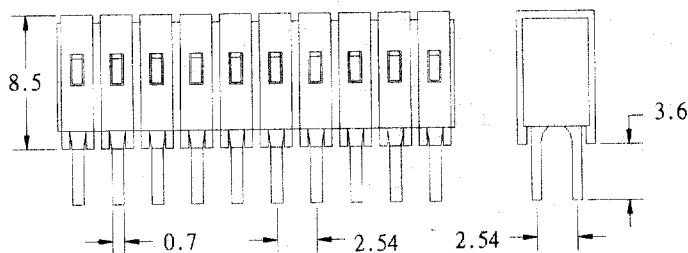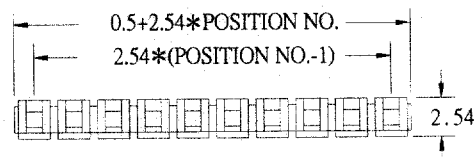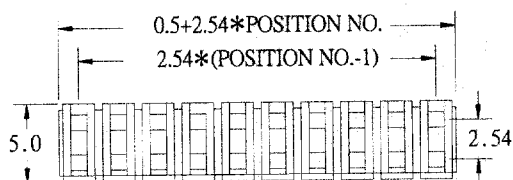

HOW TO ORDER

1 2 3 4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
SINGLE ROW 1*2 - 1*43 DUAL ROW 2*2 - 2*43	A: BRASS B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK

