

SPECIFICATIONS

Mechanical

Mating Force: 4Pounds Max. Unmating Force: 4Pounds Max.

Durability: 1000 Cycles

Electrical

Current Rating: 1.5A Max. Voltage Rating: 150 VAC

Dielectric Withstanding Voltage: 1000V Contact To Contact


1500V Contact To Shield

Physical

Housing: Thermoplastic, UL 94V-0 Rated In Black Color

Contact: Copper Alloy Shell: Copper Alloy

Operating Temperature: 0 to +70



JM Series


R/A, T/H Type


1.02mm [.040"] Pitch

RJ45 1*1


Modular Jack

DRAWING





ORDERING INFORMATION

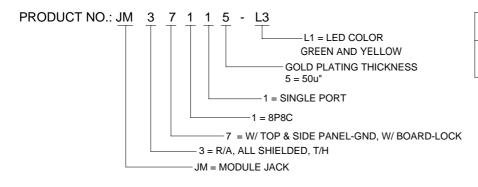

P/N	LED 2	LED 2
	9 ♦ ♦ 10	11 💠 💠 12
JM37115-L3	GREEN	YELLOW
	\rightarrow	\rightarrow