


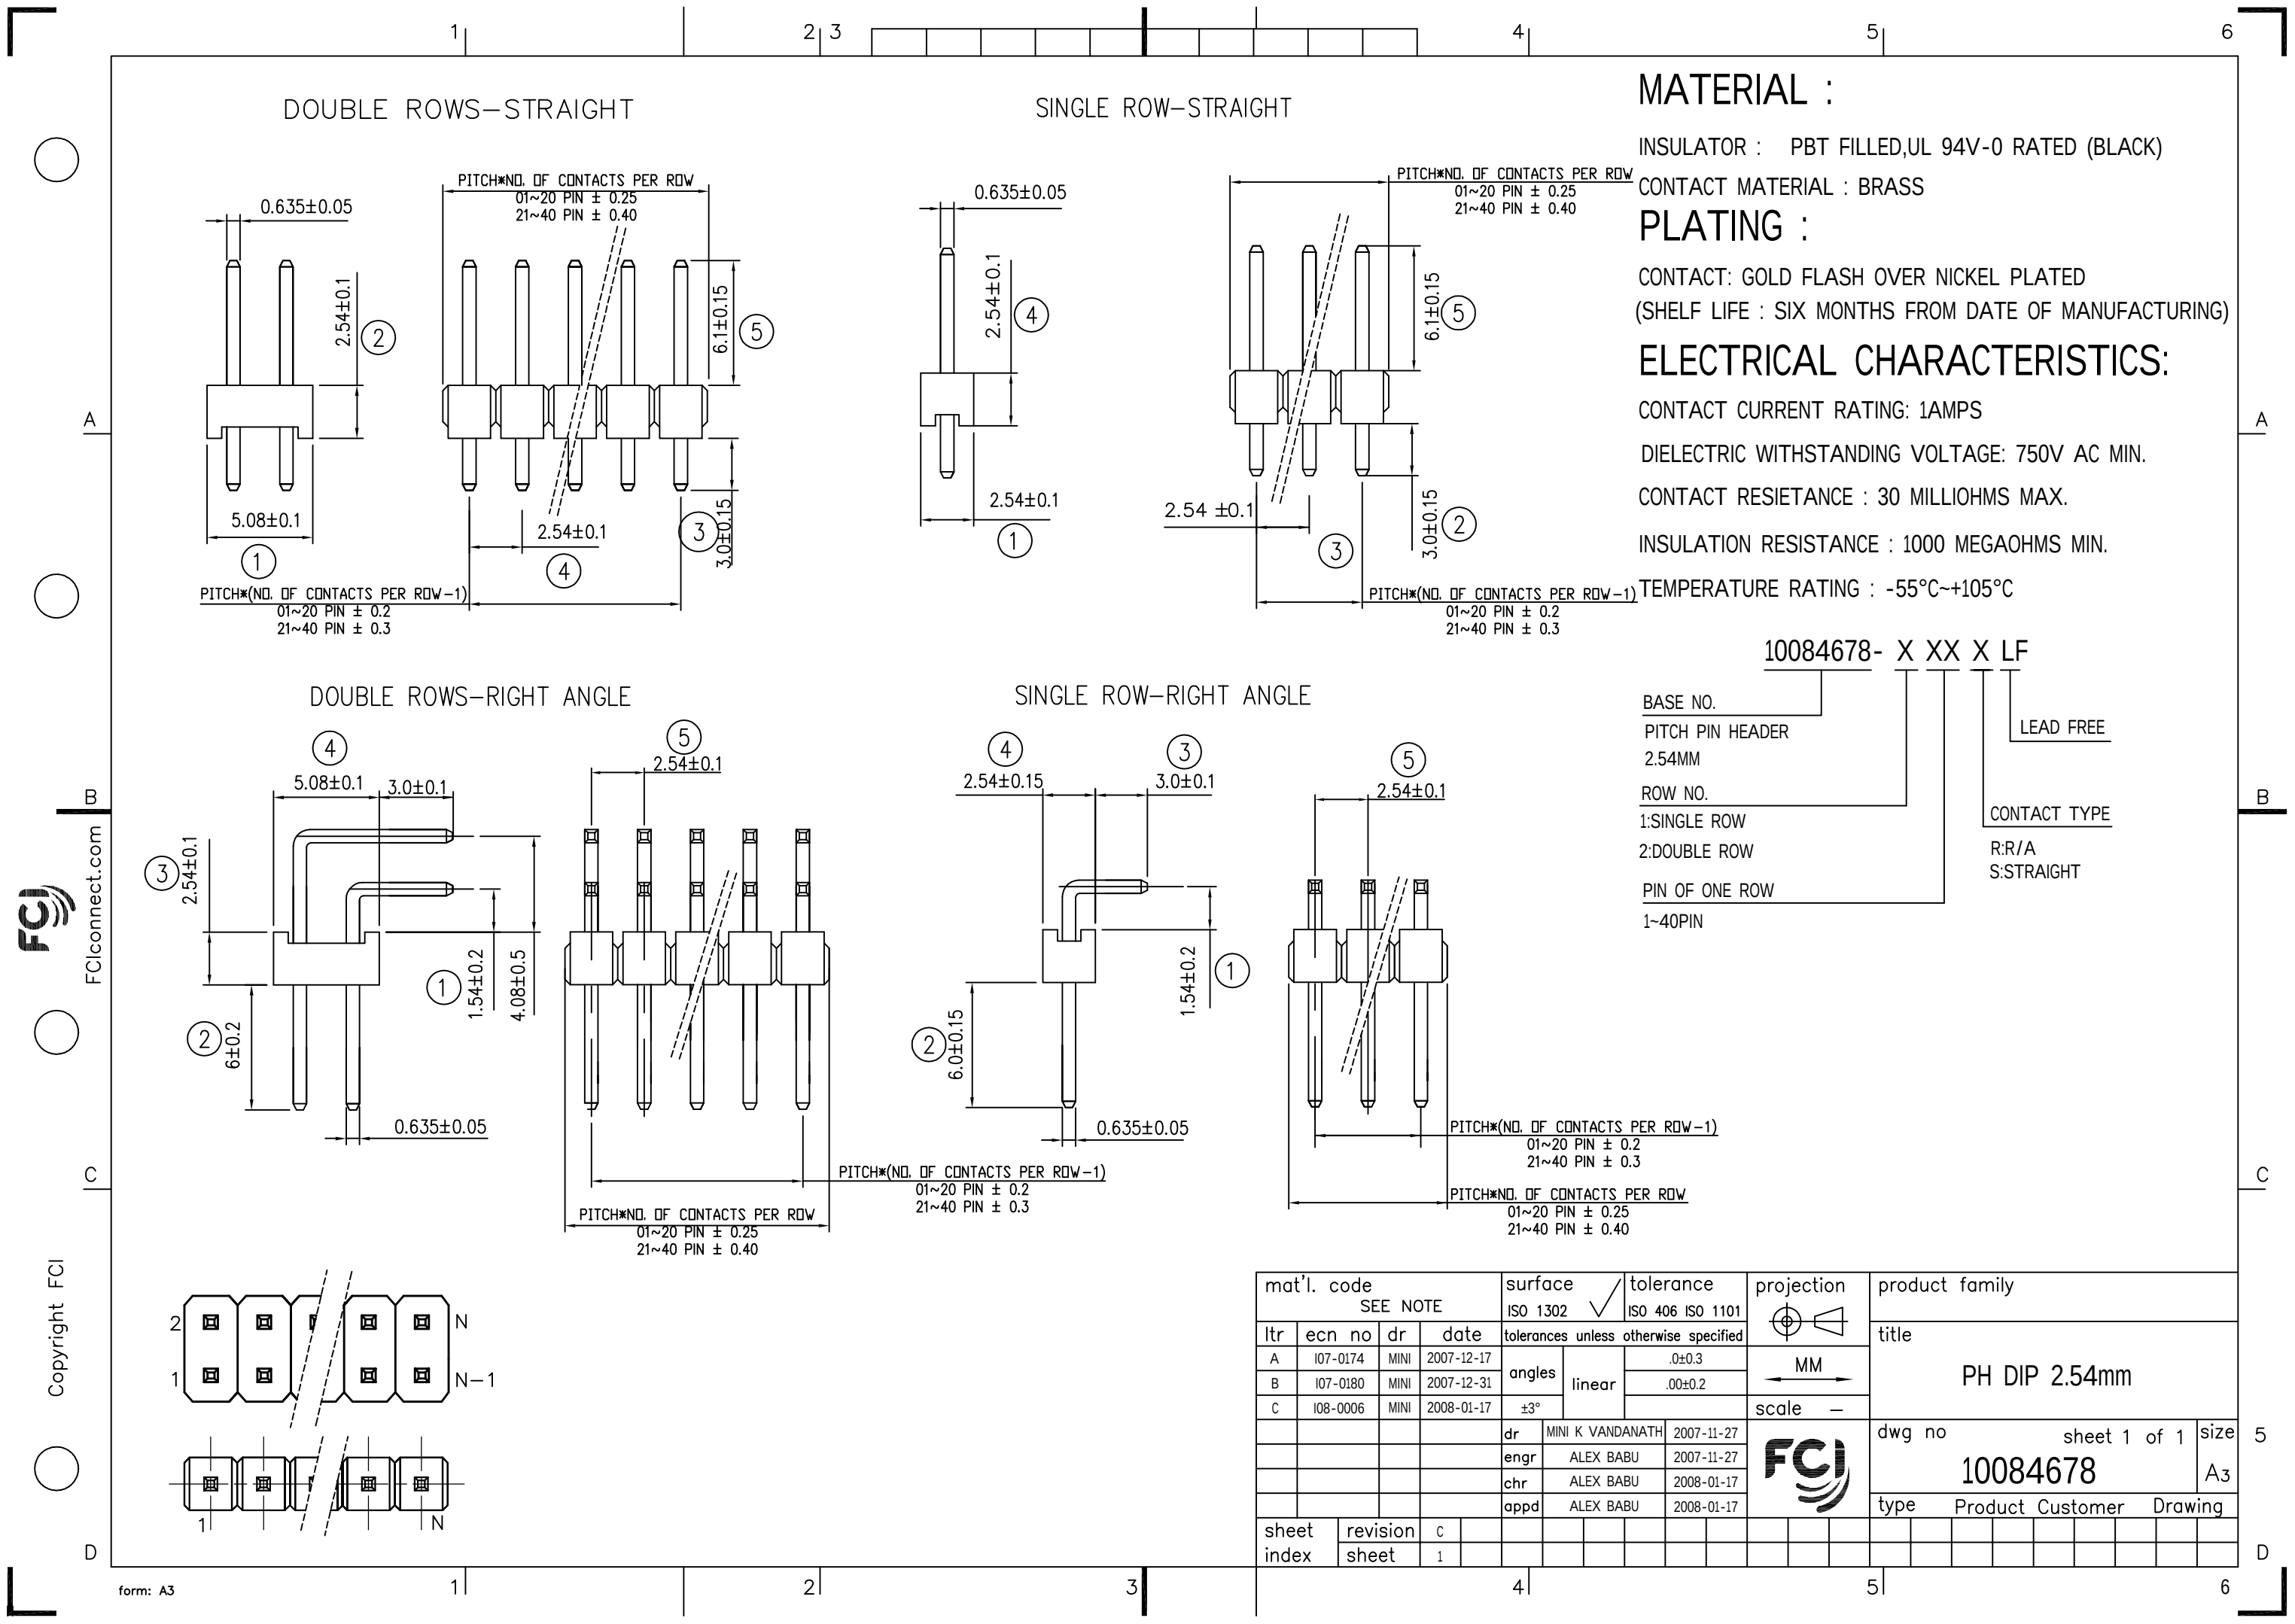

MATERIAL :
INSULATOR : PBT FILLED,UL 94V-0 RATED (BLACK)
CONTACT MATERIAL : BRASS
PLATING :
CONTACT: GOLD FLASH OVER NICKEL PLATED
(SHELF LIFE : SIX MONTHS FROM DATE OF MANUFACTURING)
ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING: 1AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 750V AC MIN.
CONTACT RESIETANCE : 30 MILLIOHMS MAX.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C~+105°C

10084678- X XX X LF

BASE NO.
PITCH PIN HEADER
2.54MM

ROW NO.
1:SINGLE ROW
2:DOUBLE ROW

PIN OF ONE ROW
1~40PIN

LEAD FREE

CONTACT TYPE
R/R/A
S:STRAIGHT

mat'l. code SEE NOTE				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM	title PH DIP 2.54mm			
A	I07-0174	MINI	2007-12-17	angles linear	±0.3					
B	I07-0180	MINI	2007-12-31		±0.2					
C	I08-0006	MINI	2008-01-17		±3°					
				dr	MINI K VANDANATH	2007-11-27	FCI		dwg no	
				engr	ALEX BABU	2007-11-27			sheet 1 of 1	
				chr	ALEX BABU	2008-01-17			size	
				appd	ALEX BABU	2008-01-17			A3	
sheet index	revision sheet	C	1					type		Product Customer Drawing