
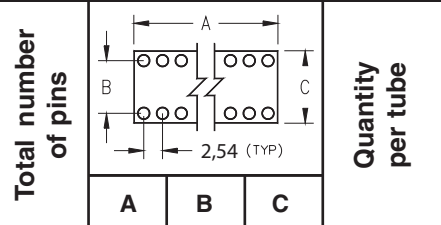


- Unique floating contacts compensate for effects of unevenly dispensed solder paste.
- High temperature insulator can withstand infrared reflow and vapor phase soldering.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #1434 pin. See page 131 for details.

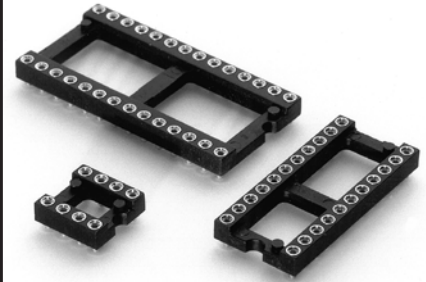

**Ordering Information**

Total number of pins	Pin Spacing			Quantity per tube
	A	B	C	
10	12,6	5,08	7,6	41
4	5,0	7,62	10,1	100
6	7,6	7,62	10,1	67
8	10,1	7,62	10,1	50
10	12,6	7,62	10,1	40
14	17,7	7,62	10,1	28
16	20,3	7,62	10,1	25
18	22,8	7,62	10,1	22
20	25,3	7,62	10,1	20
22	27,8	7,62	10,1	18
24	30,4	7,62	10,1	16
28	35,5	7,62	10,1	14
20	25,4	10,16	12,7	20
22	27,8	10,16	12,7	18
24	30,4	10,16	12,7	16
28	35,5	10,16	12,7	14
32	40,6	10,16	12,7	12
24	30,5	15,24	17,7	16
28	35,5	15,24	17,7	14
32	40,6	15,24	17,7	12
36	45,7	15,24	17,7	11
40	50,8	15,24	17,7	10
42	53,3	15,24	17,7	9
48	60,9	15,24	17,7	8
50	63,5	15,24	17,7	8
52	66,0	15,24	17,7	7
50	63,5	22,86	25,3	8
52	66,0	22,86	25,3	7
64	81,2	22,86	25,3	6

*XX= Plating Code  
See Below*

**RoHS**  
2002/95/EC

- 114-XX-210-41-117000
- 114-XX-304-41-117000
- 114-XX-306-41-117000
- 114-XX-308-41-117000
- 114-XX-310-41-117000
- 114-XX-314-41-117000
- 114-XX-316-41-117000
- 114-XX-318-41-117000
- 114-XX-320-41-117000
- 114-XX-322-41-117000
- 114-XX-324-41-117000
- 114-XX-328-41-117000
- 114-XX-420-41-117000
- 114-XX-422-41-117000
- 114-XX-424-41-117000
- 114-XX-428-41-117000
- 114-XX-432-41-117000
- 114-XX-624-41-117000
- 114-XX-628-41-117000
- 114-XX-632-41-117000
- 114-XX-636-41-117000
- 114-XX-640-41-117000
- 114-XX-642-41-117000
- 114-XX-648-41-117000
- 114-XX-650-41-117000
- 114-XX-652-41-117000
- 114-XX-950-41-117000
- 114-XX-952-41-117000
- 114-XX-964-41-117000

SPECIFY PLATING CODE XX=	13◇		93		43◇	
Sleeve (Pin)		0,25µm Au		5,08µm Sn/Pb		5,08µm Sn
Contact (Clip)		0,76µm Au		0,76µm Au		0,76µm Au