

I/O Connector systems

SICMA-2/DCS-1

90 way sealed connector system


Features

90 way - 90 x 1.5 mm pin header

- Stitch-in pin headers
- 3 row 3.33 x 6 mm pitch
- Gasket panel seal
- Mechanical polarization
- Straight or right angle version for PCB

90 way female housing for 1.5 mm terminals

- Rear sealing by grommet
- Circumferential interface seal
- Pre-assembled front grid supports blade terminals guiding and mating
- Terminal position assurance (T.P.A.)
- Cable protection cover
- Locking cam
- Several colour codings available

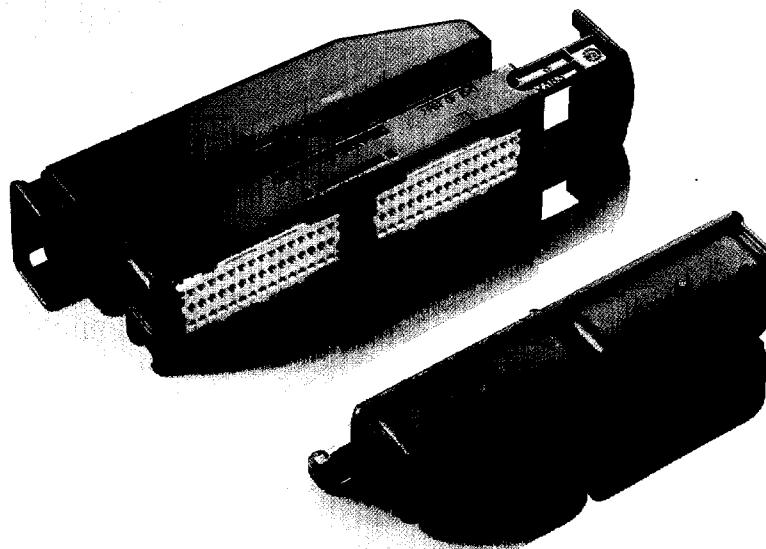

Part Numbers	No. of Position	Terminal size	Type	Colour
211 PL902Y0008	90	1.5 mm	Pin header	Black
211 PL902Y8008	90	1.5 mm	Pin header	Grey
211 PL902Y1008	90	1.5 mm	Pin header	Brown
211 PC902S0008	90	1.5 mm	Female housing	Black
211 PC902S8008	90	1.5 mm	Female housing	Grey
211 PC902S1008	90	1.5 mm	Female housing	Brown
211 A900006			Cover	Black
211 A900004			Locking cam	Purple

Performance characteristics

- Temperature range :
from -40°C to +125°C
- Contact retention force : > 100 N
- Contact insertion force : < 12 N
- Sealing protection : IP 68
- Acceptable wire range :
from 0.35 to 2 mm²
- Housing locking strength : > 120 N

Construction

- Housing material :
- Female housing : PBT
- Pin header : PBT
- Interface seal : Silicone
- Rear grommet seal : Silicone
- Tab material and plating :
CuZn30+SnPb

Tooling

- T.P.A. removal tool : 210S040
- Terminal removal tool : 210S048

Connector compatibility


- Usable terminals :
- Sicma-2 1.5 mm female terminals
- Sicma-3 1.5 mm female terminals

I/O Connector systems


SICMA-2/DCS-1

Dimensional characteristics

Pin header

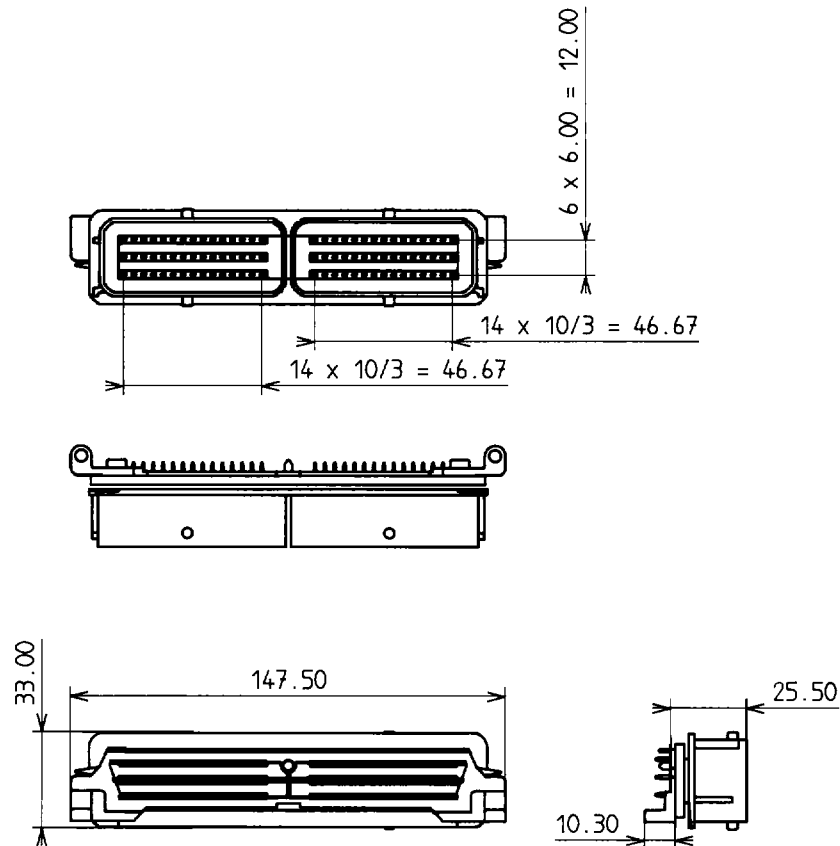

Female housing with locking cam

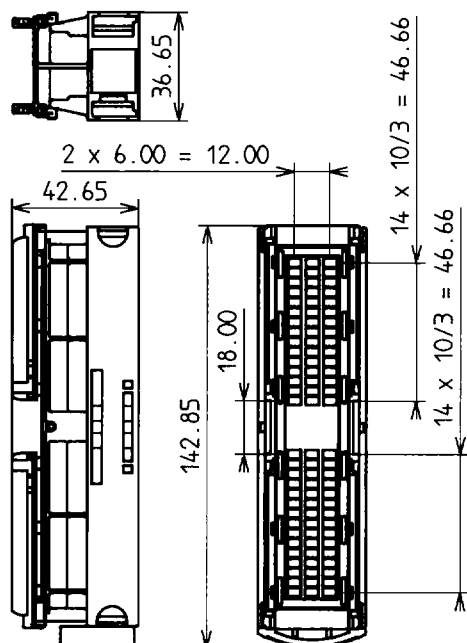

Protection cover

