

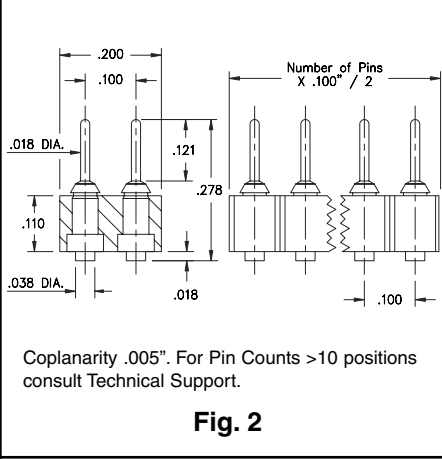



- Series 329 and 429 pin interconnects offer vertical Surface Mount MM #2956-X solder tails. See page 176 for details.
- Series 340 Surface mount sockets use MM #4078 pins. Series 414 sockets use MM #1434 pins. See pages 131 and 136 for details.
- Series 340 and 414 receptacles use Hi-Rel, 4-finger BeCu #30 contacts rated at 3 amps. Receptacles accept .015"-.025" diameter pins. See page 208 for details.
- Insulators are high temp. thermoplastic.

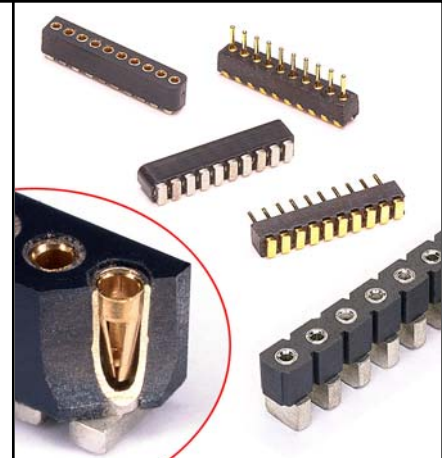

Ordering Information	
Fig. 1	Series 329...560 Surface Mount Pin Header 329-XX-1 _ _ -00-560000 Specify # of pins → 02-64
	Series 429...560 Surface Mount Pin Header 429-XX-2 _ _ -00-560000 Specify # of pins → 04-72

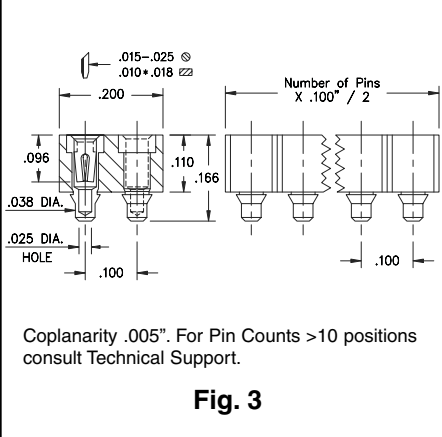

	XX= Plating Code See Below	
Pin Plating	10 μ" Au	200 μ" Sn

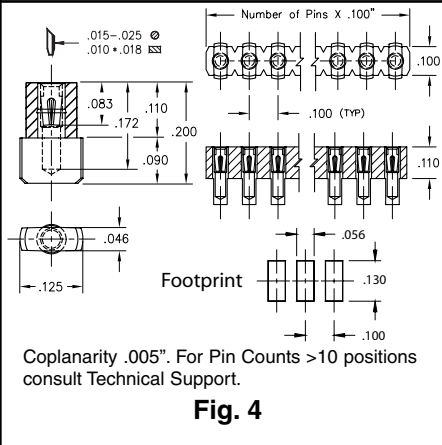

Ordering Information	
Fig. 3	Series 414...117 Surface Mount Socket 414-XX-2 _ _ -41-117000 Specify # of pins → 04-72
	Series 340...780 Surface Mount Socket 340-XX-1 _ _ -30-780100 Specify # of pins → 02-64

	XX= Plating Code See Below				
			SPECIFY PLATING CODE XX=		
Sleeve (Pin)	10 μ" Au	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn
Contact (Clip)	30 μ" Au	30 μ" Au	200 μ" Sn/Pb	30 μ" Au	200 μ" Sn