

Low Profile

Rugged Unity Gain Teardrop™ Antenna

Model


726-L20N • 726-L20U

Broadband — covers entire frequency range without tuning

Durable — low profile Teardrop ABS Tek Black™ housing provides resistance to chalking

High Performance — supplied with low loss cable to optimize system performance

Versatile — Ideal for emergency vehicles, tractor trailers, buses, construction equipment and other rugged operating environment vehicles, *ground plane required*

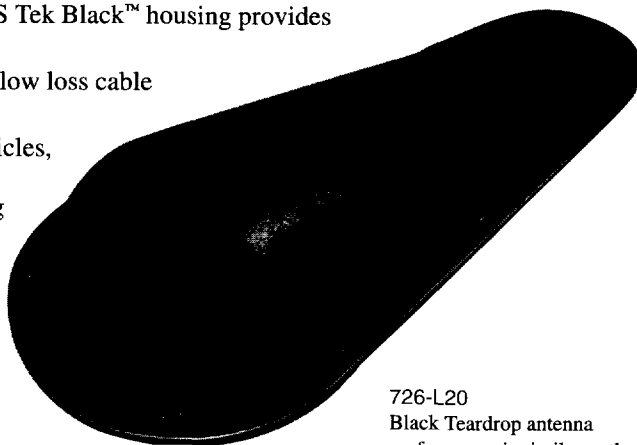

726-L20

Black Teardrop antenna performance is similar to the ASP-930 and can be used for applications where its profile and color are more suitable.

Specifications	
Electrical	
Power	100 watts maximum
Gain	Unity (2 dBi)
Frequency Range	806-869 MHz
VSWR	1.9:1
Impedance	50 ohms
Polarization	Vertical
Mechanical	
Antenna Material	Brass and copper
Radome Material	ABS - Tek Black
Dimensions	Height: 2.3 inches (5.8 cm) Length: 10.5 inches (26.7 cm) Width: 4.5 inches (11.5 cm)
Mounting Hardware	4 sheet metal screws and Neoprene mounting pad
Cable	15.25 ft (4.65 m), RG-8X low loss
Connectors	See table below

Available Model Configurations

Model	Connector
726-L20N	N male
726-L20U	PL-259