

des tiers propietaire. 이공 ication ecrite d rves. Reproduction ou communi que ce soit sans autorisation de reproduction FCI. nt reser ? forme q Droits (ts strictement sous quelque fc de c FCI. Dri stri as a sou Tous droits interdite so Propriete o

es in any proprietor. the pr third pari ity from t issue to n authori or is n n s strictly reserved. Reproduct ever is not permitted without of FCI. Copyright FCI.

			1 2							3 4
P	PRODUCT No. NOTE 8	PORTS No	DIM A +0.60	DIM B	DIM C±0.10	DIM D±0.	.15	GROUND LEO NUMBER ON BACK (VIEW	THE B)	Æ
	95672-X01	1	15.74	_	5.715	11.43		SEE DIAGRA ON SHT. 3		NOTE 5
	95672-X01A	1	15.74	_	5.715	11.43		1		NOTE 5
	95672-X02 -YZ	2	30.98	13.97	12.700	25.40)			NOTES:
	95672-X03 -YZ	3	44.95	27.94	19.685	39.37	,			1. RECOMMENDED P.C.B THICKNESS 1.60 MM
	95672-X04 -YZ	4	58.92	41.91	26.670	53.34	ŀ			2. HOUSING MAT'L: HIGH TEMP RESIN
	95672-X05 -YZ	5	72.89	55.88	33.655	67.31				3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WRE,PLATING SEE TABLE.
	95672-X06 -YZ	6	86.86	69.85	40.640	81.28				4. SHIELDING MATERIAL: BRASS ALLOY .25 MM THICK
	95672-X07 -YZ	7	100.83	83.82	47.625	95.25	5			SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN FINISH OF BRIGHT TIN LEAD 100u" MIN
	95672-X08 -YZ	8	114.80	97.79	54.610	109.22				LEAD FREE OPTION SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
	95672-X09 -YZ	9	128.77	111.76	61.595	123.19				FINISH OF BRIGHT PURE TIN 100u" MIN
	95672-X10 -YZ	10	142.74	125.73	68.580	137.16				(5.) SEE SNGL. PORT GROUND LEG OPTIONS, SIDE VIEW PG.1 FOR DETAILS.
	95672-X11 -YZ	11	156.71	139.70	75.565	151.13				6. ALL DIMENSIONS IN MILLIMETERS.
	95672- <u>X</u> 12 - <u>YZ</u>	12	170.68	153.67	82.550	165.10				 (7) COMPANY LOGO LOCATED IN THIS AREA. (8) ADD LF SUFFIX AT THE END OF PART NUMBER
A	3	0 30u" G.X.T. 0 = STANDARD GRND. TABS 1 15u" GOLD. 1 = NO GRND. TABS								 PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mmMINIMUM THICK CIRCUIT BOARD. SEE APLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE. 10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008. (1) PLATING OPTIONS: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
								REAR SH	IIELD	LD CODE Z
	NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE					E. 0) = S1	TANDARD	GR	GRND. LEGS
						1	= 1	STANDA	RD () GRND. LEG
				2 = ALL GRND. L						
						3	5 = N(D GRND.	LEG	EGS
						mat'l. code		data		tolerances unless otherwise specified CUSTOMER COPY
						Itr ecn no L	dr	date li	near	
								a	ngles	Ites 0° ±2° R/A GANG JACK FILTER ASSY 8 POS SHIELDED SNAP PEG
								d	r	L.POTTIEGER 3/15/95 MM product family MOD JACK code
										r Y.BELOPOLSKY 3/15/95 scale size dwg no 213
							ian			Y.BELOPOLSKY 3/15/95 Scale d Y.BELOPOLSKY 3/15/95 1:1 A 95672 sheet 2 of 8
						sheet revisi index sheet				
			1 2						-	PDM: Rev:L ³ STATUS:Released 20, Printed: Feb 20,

Reproduction ou communication a des tiers soit sans autorisation ecrite du propietaire Tous droits strictement reserves.

to third parties in any issue ŗ oduction Repr All rights strictly reserved







stri Js ol

issue to



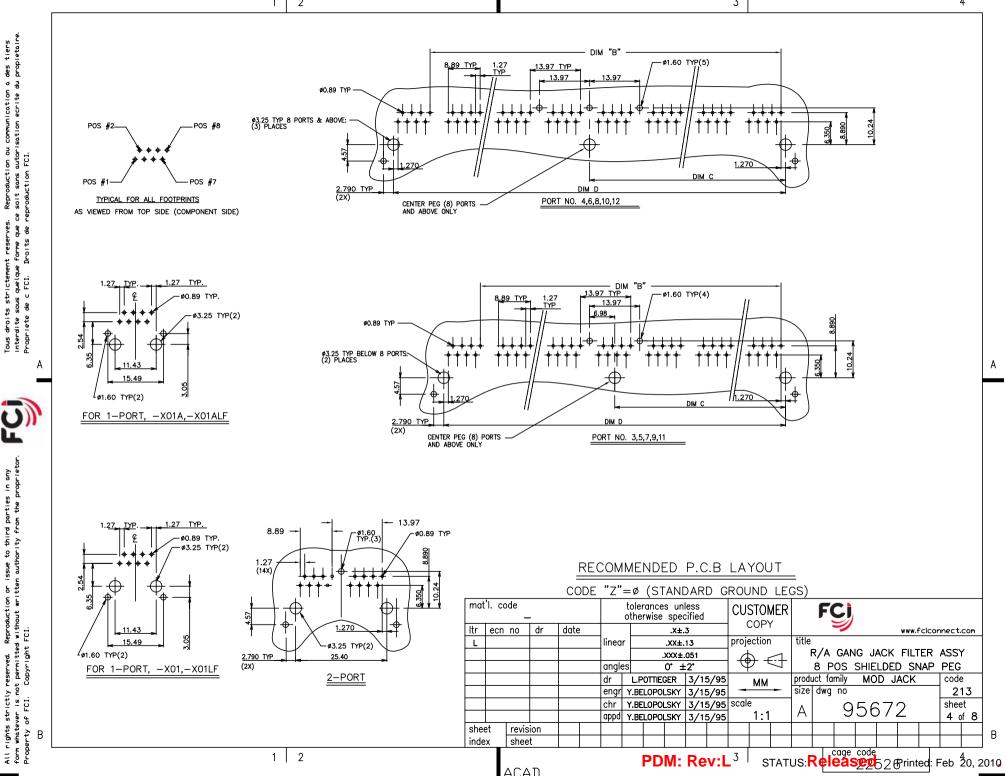


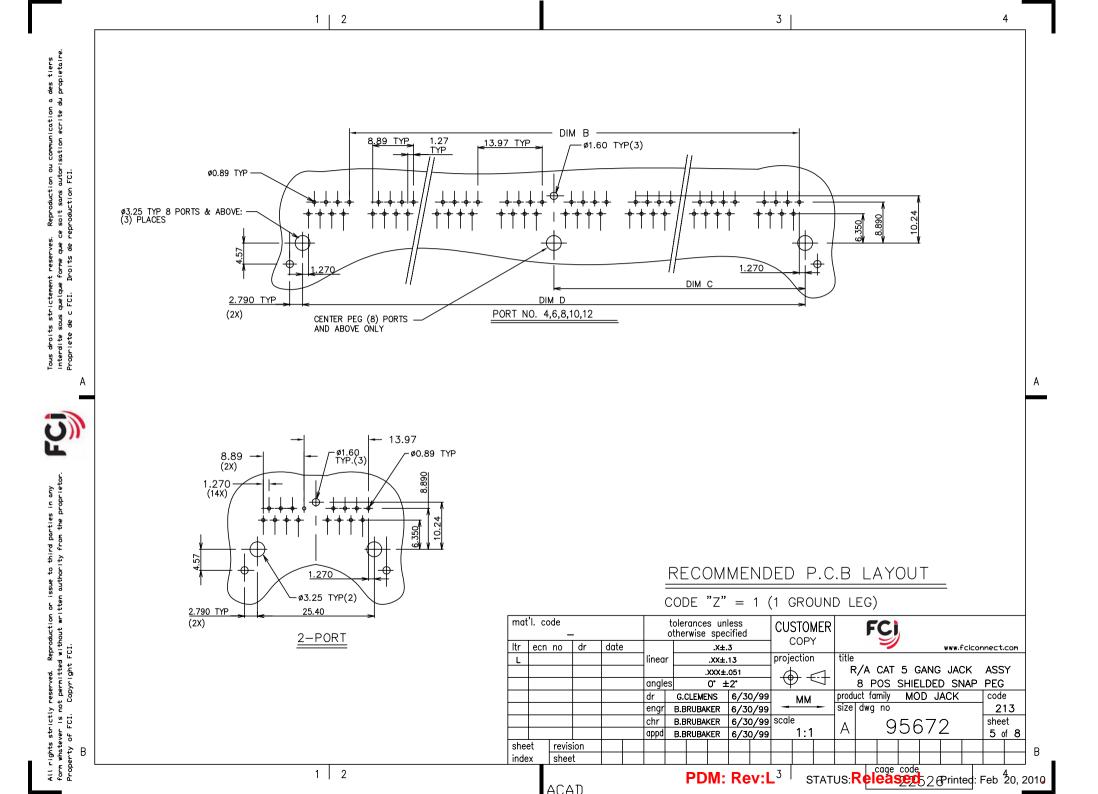







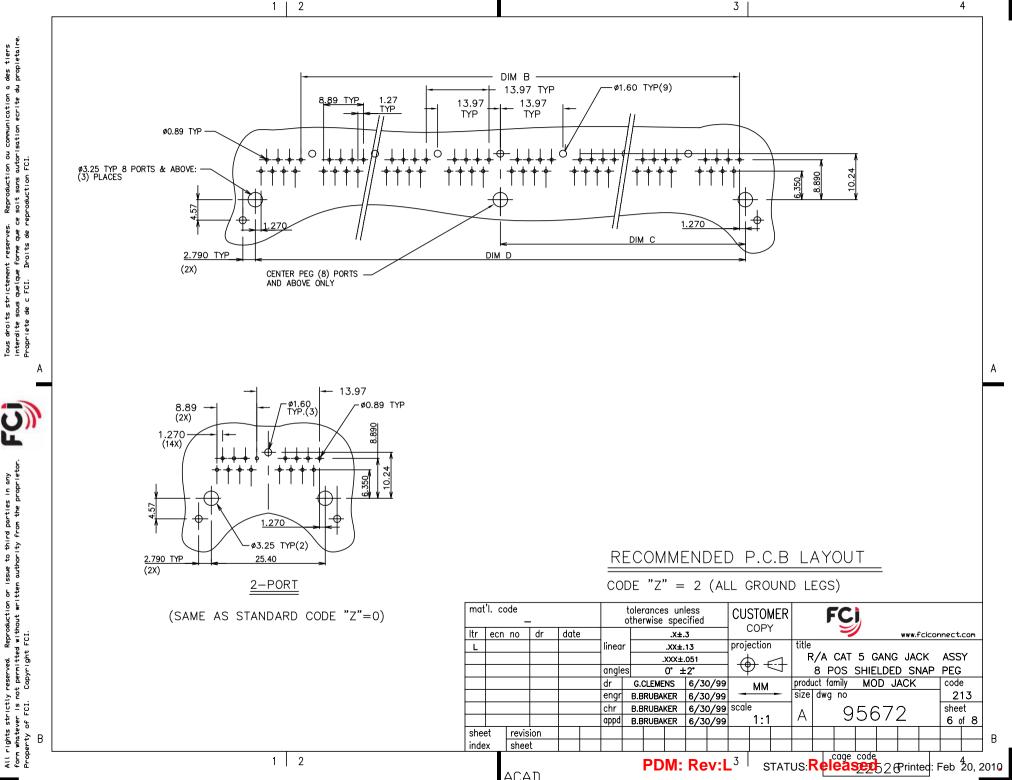



des tiers propietaire.

이공 te o

ecrit communi sation

U U

rd parties in any from the proprietor


4 -

issue to authori

ion or is written



В

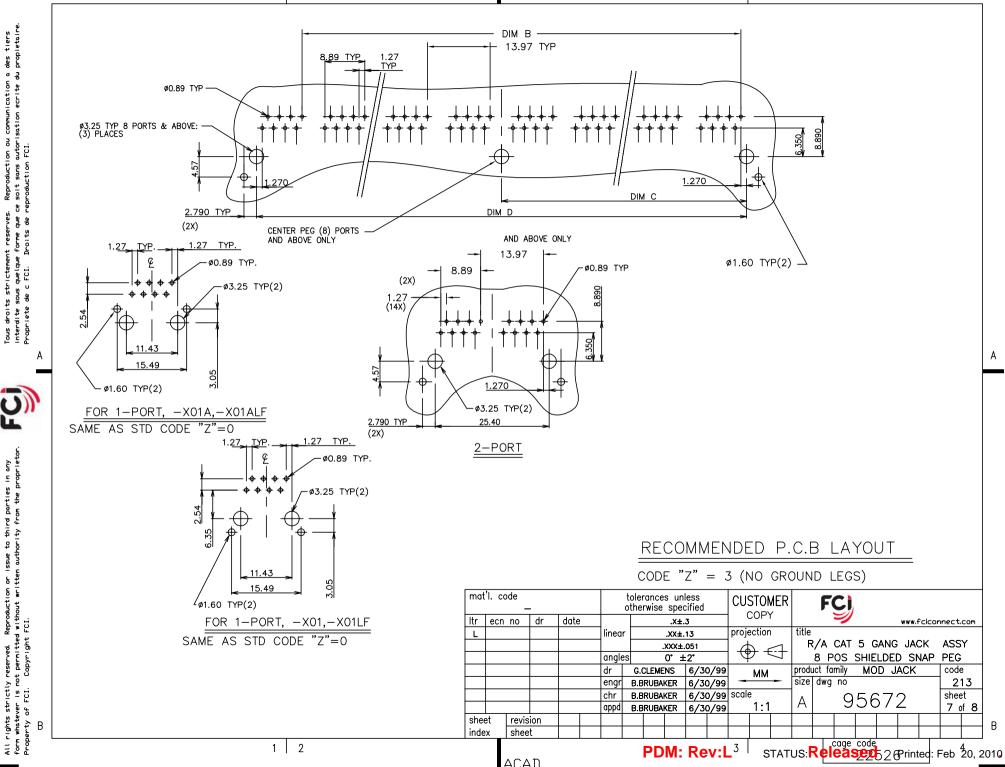

Γ.		PORTS	1 2				GROUND LEG	3	4		
	PRODUCT No. NOTE 8	No	DIM A +0.60	DIM B	DIM C±0.10	DIM D±0.15	BACK (VIEW	B)			
_	95672-X01H	1	15.74	_	5.715	11.43	SEE DIAGRAM ON SHT. 3				
	95672-X01AH	1	15.74	_	5.715	11.43	Î	NOTE 5			
	95672-X02H-YZ	2	30.98	13.97	12.700	25.40		NOTES:			
	95672-X03H-YZ	3	44.95	27.94	19.685	39.37		1. RECOMMENDED P.C.B THICKNESS 1.60 MM			
-	95672-X04H ^{-YZ}	4	58.92	41.91	26.670	53.34		2. HOUSING MAT'L: HIGH TEMP RESIN			
	95672-X05H -YZ	5	72.89	55.88	33.655	67.31		3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.			
	95672-X06H-YZ	6	86.86	69.85	40.640	81.28		4. SHIELDING MATERIAL: BRASS ALLOY .25 MM THICK			
	95672-X07H ^{-YZ}	7	100.83	83.82	47.625	95.25		SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN FINISH OF BRIGHT TIN LEAD 100u" MIN			
	95672-X08H-YZ	8	114.80	97.79	54.610	109.22		LEAD FREE OPTION SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN FINISH OF BRIGHT PURE TIN 100u" MIN			
	95672-X09H ^{-YZ}	9	128.77	111.76	61.595	123.19					
_	95672-X10H - YZ	10	142.74	125.73	68.580	137.16		(5.) SEE SNGL. PORT GROUND LEG OPTIONS, SIDE VIEW PG.1 FOR DETAILS.			
	95672-X11H ⁻ YZ	11	156.71	139.70	75.565	151.13		6. ALL DIMENSIONS IN MILLIMETERS.			
	95672- <u>X</u> 12 <u>H</u> -YZ	12	170.68	153.67	82.550	165.10		 (7) COMPANY LOGO LOCATED IN THIS AREA. (8) ADD LF SUFFIX AT THE END OF PART NUMBER 			
A	A CIRCUIT BOARD. SEE APLICATION NOTES/PROCED										
	-MEETS PIP PROCESS PRODUCT NO. PLATING CODE X PLATING (1) FRON							IF THEY ARE AVAILABLE. 10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES			
2							AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.				
	0	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$					(11.) PLATING OPTIONS:				
				1 = NO GRND. TABS				MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.			
	3	30u" GOL									
	5	50u" GOLI	D.				REAR SH	IELD CODE Z			
	NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE					. 0 =	STANDARD	GRND. LEGS			
							1 STANDAR	RD GRND. LEG			
							ALL GRND.	LEGS			
						3 =	NO GRND.	LEGS			
,						mat'l. code —	mat'l. code				
							date	ear .xx±.3 COPY yww.fcico	nnect.com		
,								XXX±.051 R/A GANG JACK FILTER			
:							ar dr		PEG code		
							er	ngr Y.BELOPOLSKY 3/15/95	213		
							ch	nr <u>Y.BELOPOLSKY 3/15/95</u> scale ppd <u>Y.BELOPOLSKY 3/15/95</u> 1:1 A 95672	sheet 8 of 8		
						sheet revision					
в						index sheet			+ +		