



ASH-10 Series Pitch 10mm

Specification



BARRIER MATERIAL: THERMOPLASTIC (UL 94V-O), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 14-18 STR.
 RATING: 15 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE



ASH-101

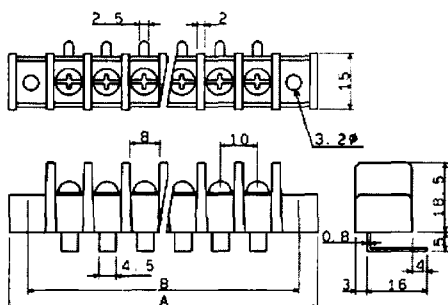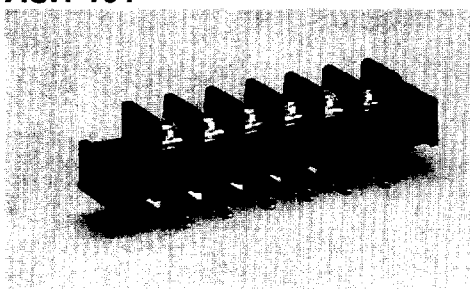



ASH-102

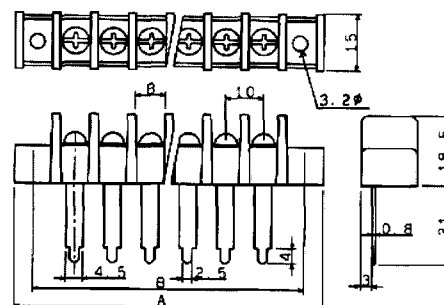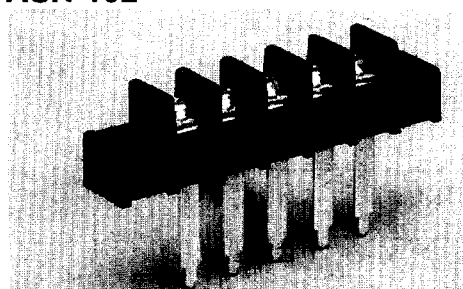

ASH-103

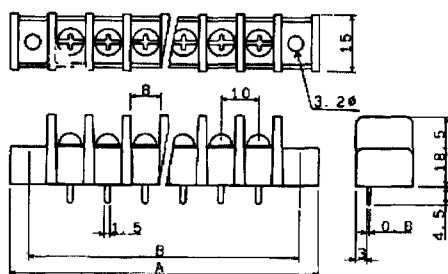
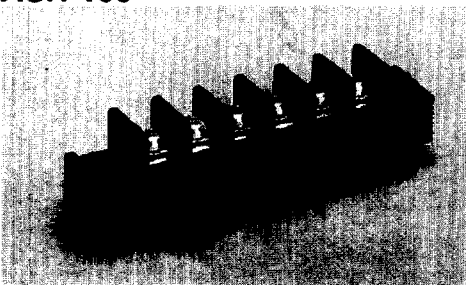


ASH-104

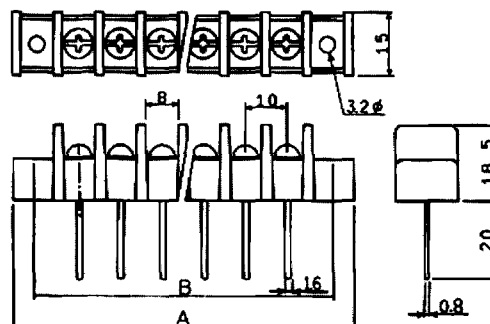
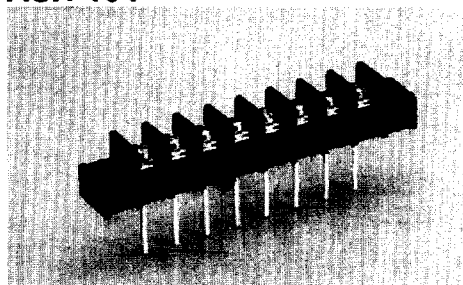


ASH-10 Series Continued....



ASH-105

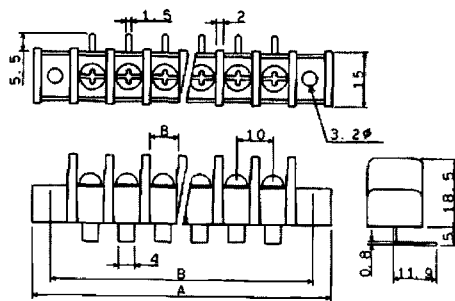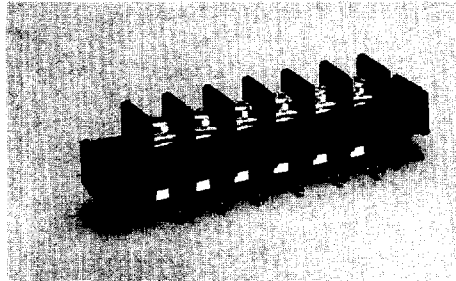



ASH-106

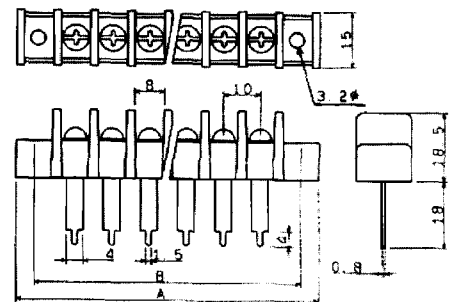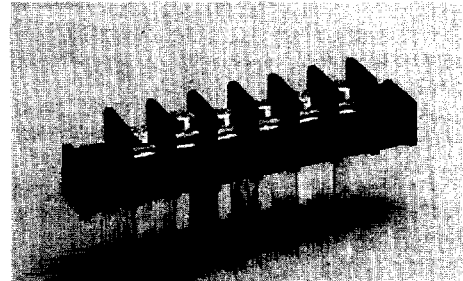

ASH-107

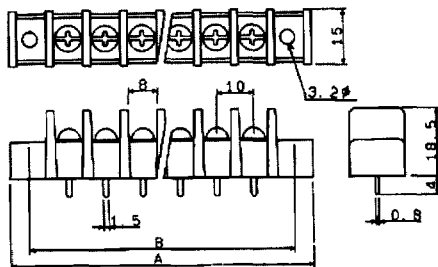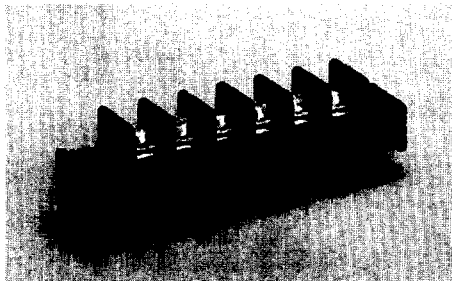

ASH-108

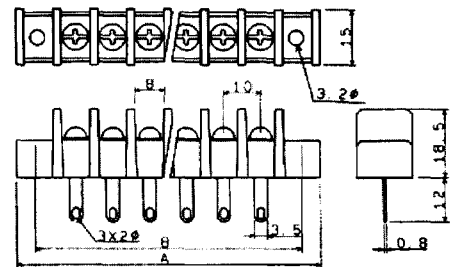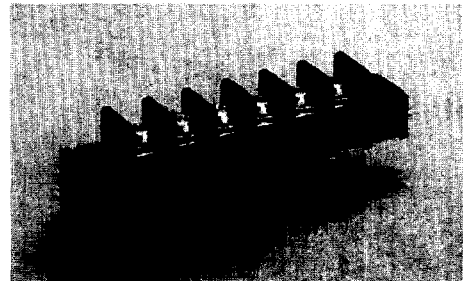

DIMENSION: $\pm 0.8\text{mm/m}$

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	41	51	61	71	81	91	101	111	121	131	141	151	161	171	182.5
B	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170

Pole	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
A	192	202.5	212.5	222.5	232.5	242.5	252.5	263	273	283	293	303	313	323	
B	180	190	200	210	220	230	240	250	260	270	280	290	300	310	