

DIMM Connector

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.75Lbs (0.34kg) min.
Durability: 25 Cycles
Vibration: Pass MIL-STD-1344A, method 2005 condition I


Electrical

Voltage Rating: 250V
Current Rating: 1.0A max.
Dielectric Withstanding Voltage: 500V
Insulation Resistance: 1000MW min.
Low Level Contact Resistance (Dry Circuit): 30mW max. initial


Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Ejector Lever: Thermoplastic, UL 94V-0 rated in Ivory Color
Contact: Copper alloy
Operating Temperature: 0 to +85

AU50 Series
Right Angle, T/H Type
1.27mm [.050"] Pitch
100 Pos.

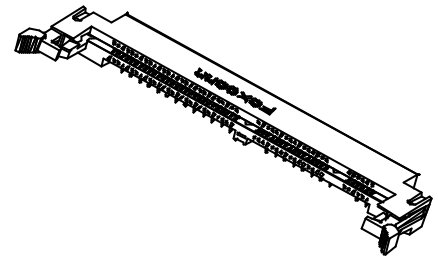


DRAWING

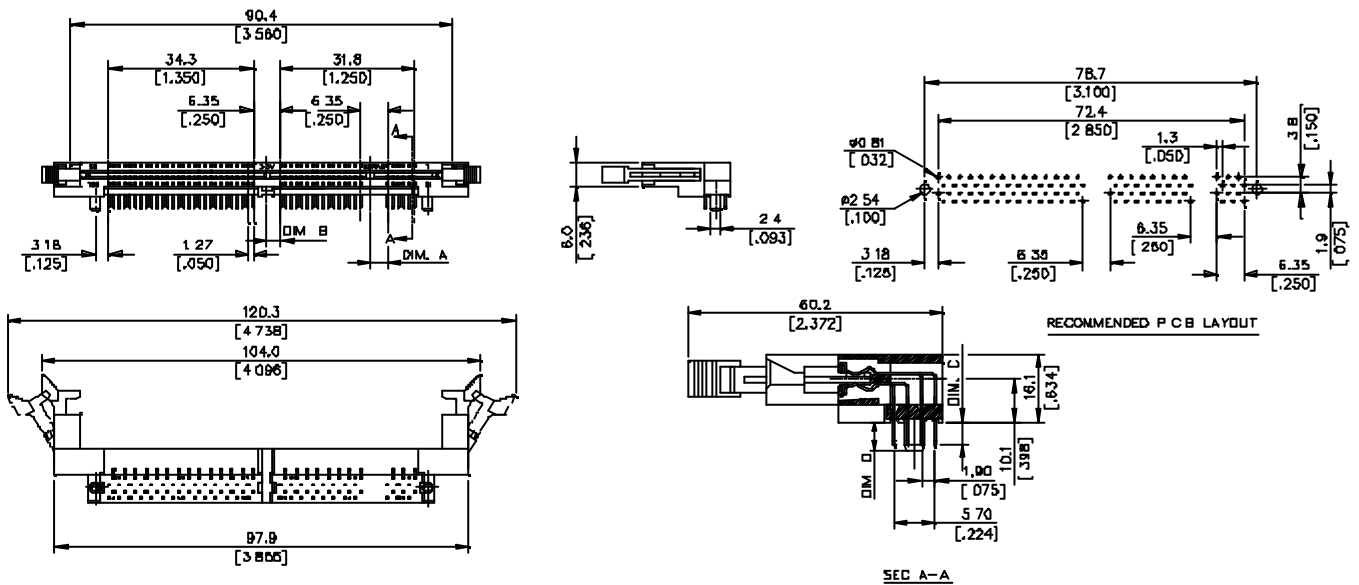

ORDERING INFORMATION

PRODUCT NO.: AU0****-****

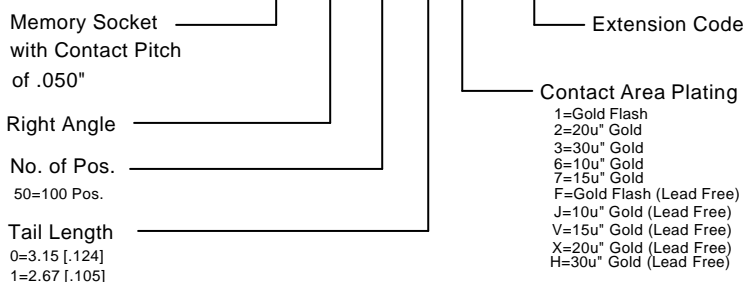

AU500*-N1	3.3 V	4.175 [.164]	3.175 [.125]	3.15 [.124]	3.22 [.127]
AU501*-N1	3.3 V	4.175 [.164]	3.175 [.125]	2.67 [.105]	3.22 [.127]
P/N	VOLTAGE MARKING	DM. A	DM. B	DM. C	DM. D