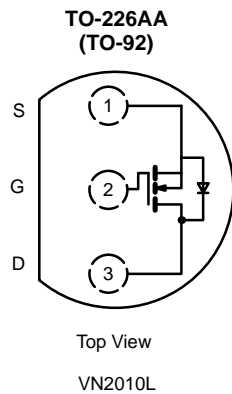


N-Channel 200-V (D-S) MOSFETs

PRODUCT SUMMARY				
Part Number	$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
VN2010L	200	10 @ $V_{GS} = 4.5$ V	0.8 to 1.8	0.19
BS107		28 @ $V_{GS} = 2.8$ V	0.8 to 3	0.12

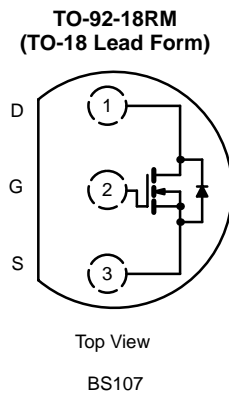
- Low On-Resistance: 6 Ω
- Secondary Breakdown Free: 220 V
- Low Power/Voltage Driven
- Low Input and Output Leakage
- Excellent Thermal Stability
- Low Offset Voltage
- Full-Voltage Operation
- Easily Driven Without Buffer
- Low Error Voltage
- No High-Temperature "Run-Away"
- High-Voltage Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Transistors, etc.
- Telephone Mute Switches, Ringer Circuits
- Power Supply, Converters
- Motor Control



Device Marking Front View

"S" VN
 2010L
 xxyy

"S" = Siliconix Logo
xxyy = Date Code



Device Marking Front View

"S" BS
 107
 xxyy

"S" = Siliconix Logo
xxyy = Date Code

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	VN2010L	BS107	Unit
Drain-Source Voltage	V_{DS}	200	200	V
Gate-Source Voltage	V_{GS}	± 30	± 25	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	$T_A = 25^\circ\text{C}$	0.19	A
		$T_A = 100^\circ\text{C}$	0.12	
Pulsed Drain Current ^a	I_{DM}	0.8		
Power Dissipation	P_D	$T_A = 25^\circ\text{C}$	0.8	W
		$T_A = 100^\circ\text{C}$	0.32	
Thermal Resistance, Junction-to-Ambient	R_{thJA}	156	250	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

Notes

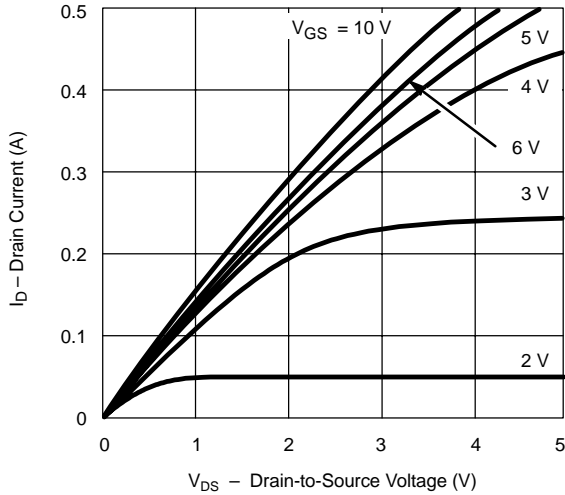
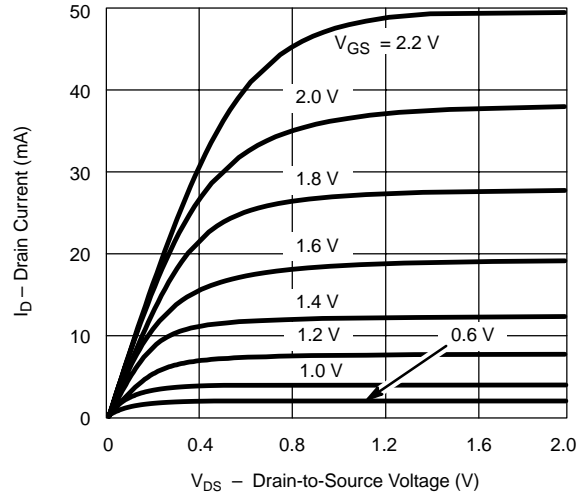
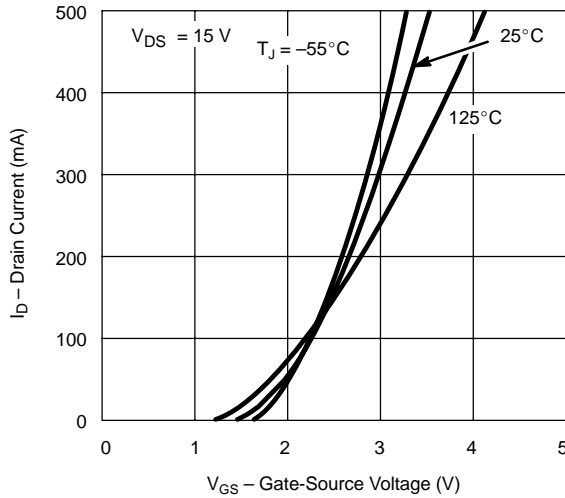
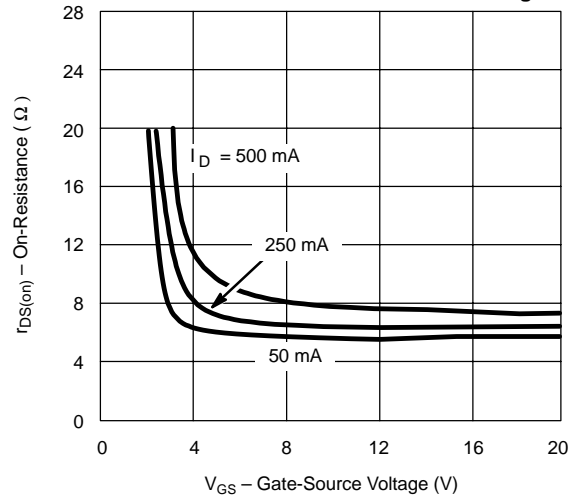
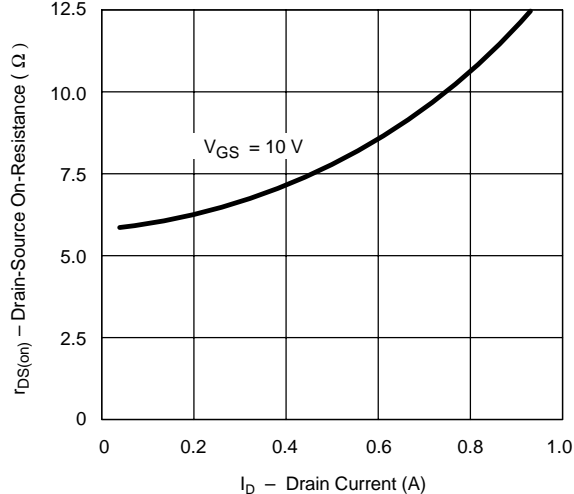
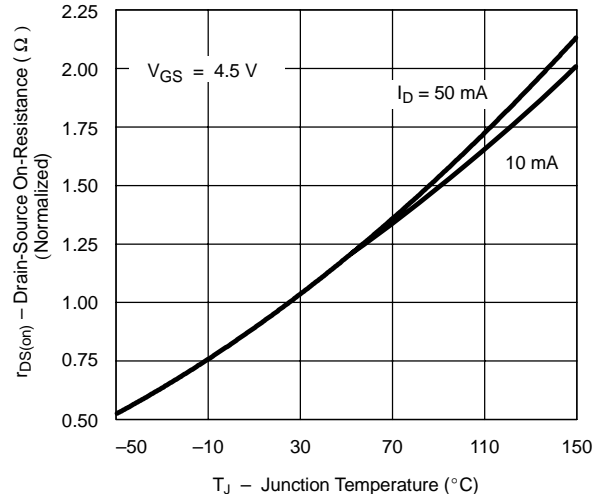
a. Pulse width limited by maximum junction temperature.

SPECIFICATIONS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)								
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				VN2010L		BS107		
				Min	Max	Min	Max	
Static								
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 100\ \mu\text{A}$	220	200		200		V
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 1\text{ mA}$	1.2	0.8	1.8	0.8	3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$			± 10			nA
		$V_{DS} = 0\text{ V}, V_{GS} = \pm 15\text{ V}$					± 10	
Drain Leakage Current	I_{DSV}	$V_{DS} = 70\text{ V}, V_{GS} = 0.2\text{ V}$					1	μA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 130\text{ V}, V_{GS} = 0\text{ V}$					0.03	
		$V_{DS} = 160\text{ V}, V_{GS} = 0\text{ V}$ $T_J = 125^\circ\text{C}$			1		100	
On-State Drain Current ^b	$I_{D(on)}$	$V_{DS} = 10\text{ V}, V_{GS} = 10\text{ V}$	0.7	0.1				A
Drain-Source On-Resistance ^b	$r_{DS(on)}$	$V_{GS} = 2.8\text{ V}, I_D = 0.02\text{ A}$	6				28	Ω
		$V_{GS} = 4.5\text{ V}, I_D = 0.05\text{ A}$	6		10			
		$T_J = 125^\circ\text{C}$	11		20			
Forward Transconductance ^b	g_{fs}	$V_{DS} = 15\text{ V}, I_D = 0.1\text{ A}$	180	125				mS
Common Source Output Conductance ^b	g_{os}	$V_{DS} = 15\text{ V}, I_D = 0.05\text{ A}$	0.15					
Dynamic								
Input Capacitance	C_{iss}	$V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V}, f = 1\text{ MHz}$	35		60			pF
Output Capacitance	C_{oss}		9		30			
Reverse Transfer Capacitance	C_{rss}		1		15			
Switching^c								
Turn-On Time	t_{ON}	$V_{DD} = 25\text{ V}, R_L = 250\ \Omega$ $I_D \cong 0.1\text{ A}, V_{GEN} = 10\text{ V}$ $R_G = 25\ \Omega$	5		20			ns
Turn-Off Time	t_{OFF}		21		30			

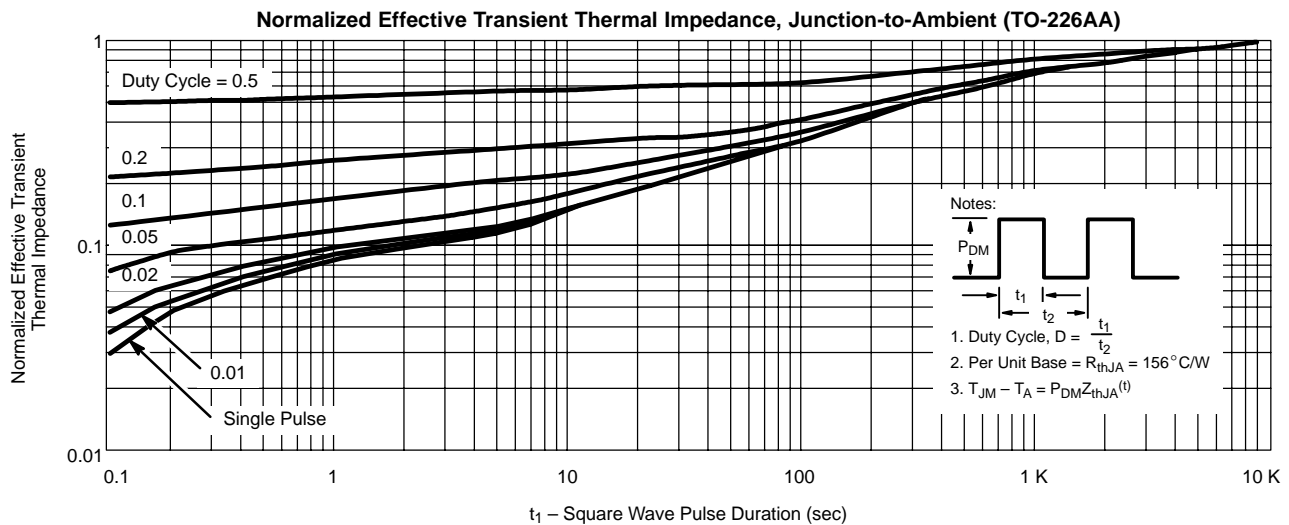
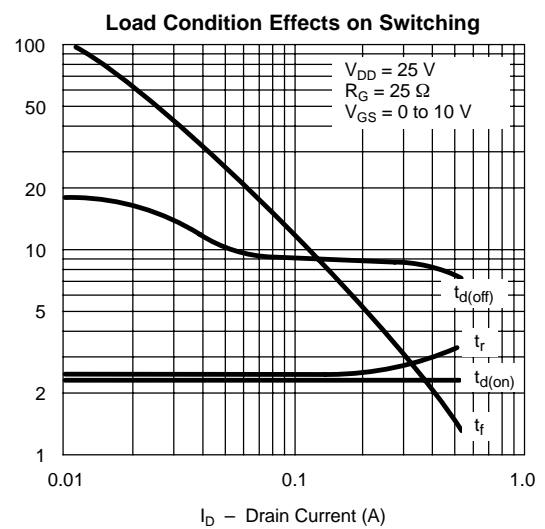
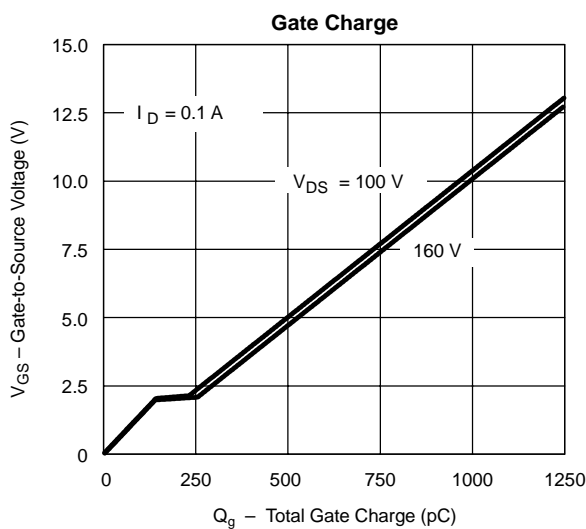
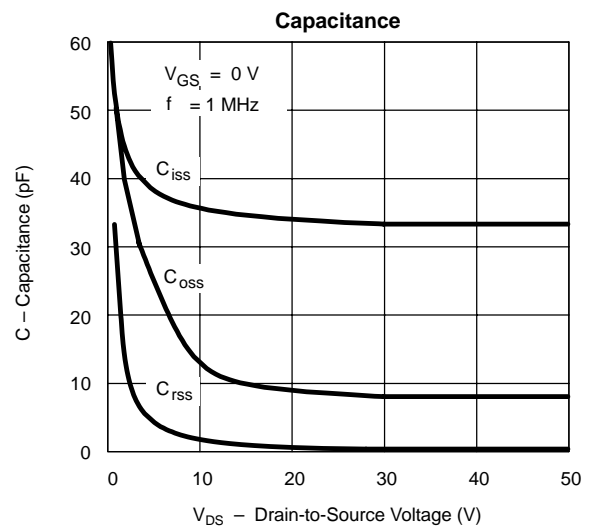
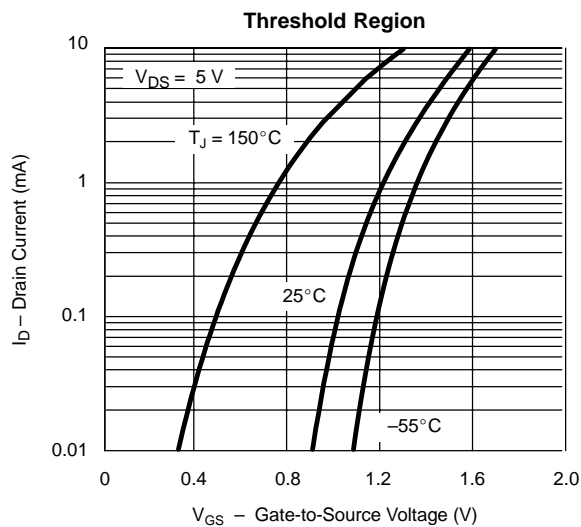
Notes

- a. For DESIGN AID ONLY, not subject to production testing.
b. Pulse test: $PW \leq 300\ \mu\text{s}$ duty cycle $\leq 2\%$.
c. Switching time is essentially independent of operating temperature.

VNDQ20

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)
Ohmic Region Characteristics

Output Characteristics for Low Gate Drive

Transfer Characteristics

On-Resistance vs. Gate-to-Source Voltage

On-Resistance vs. Drain Current

Normalized On-Resistance vs. Junction Temperature


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)





Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.