

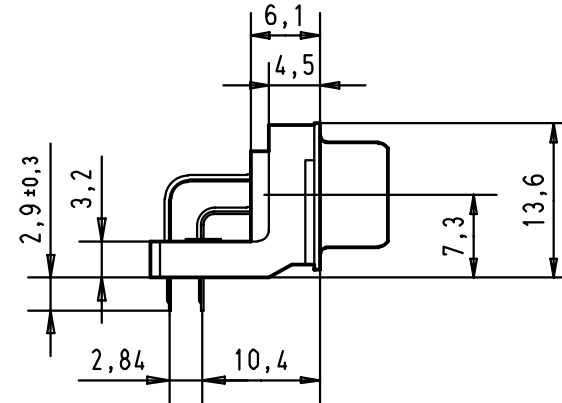
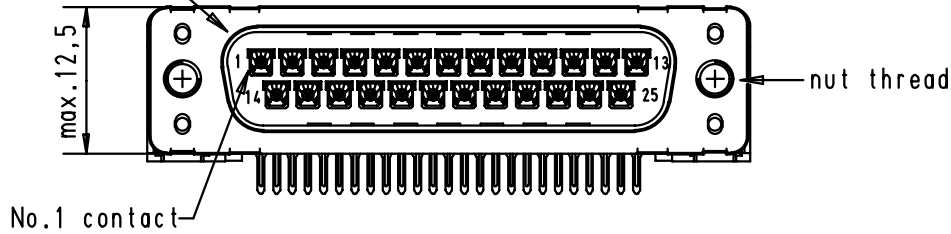


5 4 3 2 1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

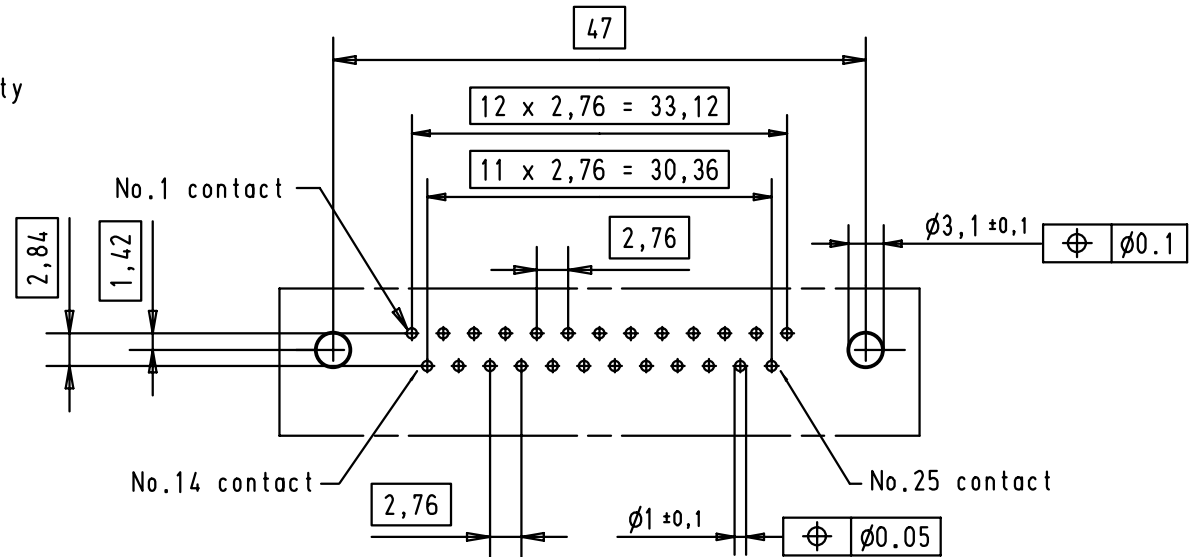

Printed board layout
component side

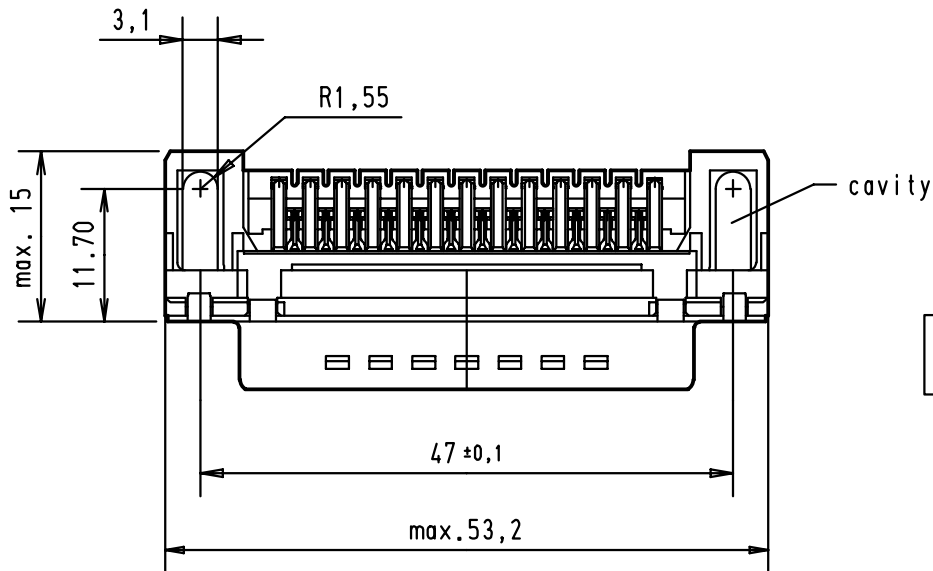

A

09 65 327 6801	M3	2					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, high temperature, male, standard, 25 poles, with solder pins 2.9, nuts and holes	Maßstab/ Scale 1.5:1
09 65 327 7801	M3	3					Detail.	05/03/02	CV		
09 65 327 5801	M3	0.76 µm Au					Insp.				
09 65 327 6802	4-40 UNC	2					Stand.				
09 65 327 7802	4-40 UNC	3	29773	18-APR-02	CV		HARTING EURL F-95972 Paris			TB 0965327x80x	Blatt/ Page 2
09 65 327 5802	4-40 UNC	0.76 µm Au	29723	05/03/02	CV						
Part number	Nut thread	Performance level	Mod.	Dat.	Name					Sub.	

09 65 327 5800
Printed board connector

Other applications

gender	male connector, right angled
Termination	SMC stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.84 mm
Board fixing	without grounding board lock
flange	hole 3.1 mm
Performance level	Performance level S4
Material	High temperature material

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 327 5801
Printed board connector

Other applications

gender	male connector, right angled
Termination	SMC stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.84 mm
Board fixing	without grounding board lock
flange	M 3
Performance level	Performance level S4
Material	High temperature material

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 327 5802
Printed board connector

Other applications

gender	male connector, right angled
Termination	SMC stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.84 mm
Board fixing	without grounding board lock
flange	UNC4-40
Performance level	Performance level S4
Material	High temperature material

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 327 5803
Printed board connector

Other applications

gender	male connector, right angled
Termination	SMC stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.84 mm
Board fixing	without grounding board lock
flange	with screw lock UNC 4-40
Performance level	Performance level S4
Material	High temperature material

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

The data sheet is up to date
2D files

Typenblatt

Typenblatt