


347 Series: | Ø 4.0 mm Mounting Snap In

NEW PRODUCT

- Rapid installation
- 180° viewing angle
- Blue and orange available
- MLQ 20
- MTBF 90,000 hrs

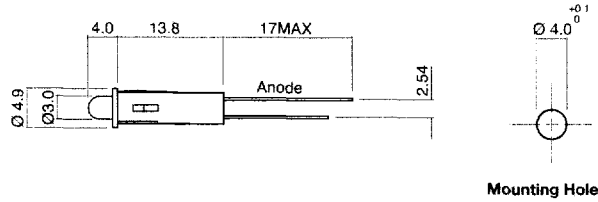

Scale 1 : 1
Dimensions in mm (Typical)


Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
347 - 305 - 01	Red	Coloured Diffused	2.1	2	1.5	650	30	0 to + 85	0 to + 85
347 - 311 - 01	Yellow		2.2	2	1.5	585			
347 - 314 - 01	Green		2.2	2	2.0	563			
347 - 305 - 04	Red		2.1	20	33	650			
347 - 311 - 04	Yellow		2.2	20	33	585			
347 - 314 - 04	Green		2.2	20	47	563			
			V	mA	mcd	nm	deg	°C	°C

352 Series: | Ø 6.35 mm Mounting Snap In (Voltage options)

NEW PRODUCT

- Rapid installation
- Low current range available
- Bi-Colour options
- 24, 48 VDC available
- MTBF 90,000 hrs

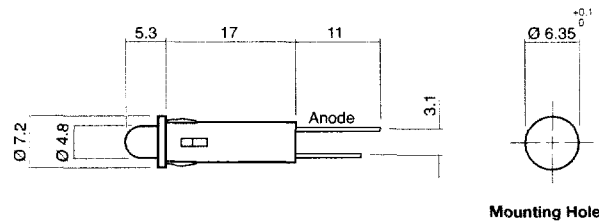

Scale 1 : 1
Dimensions in mm (Typical)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
352 - 505 - 04	Red	Coloured Diffused	2	20	33	650	30	0 to + 85	0 to + 85
352 - 511 - 04	Yellow		2	20	33	585			
352 - 514 - 04	Green		2	20	68	563			
352 - 581 - 20	Red		5/6	15/20	25/33	650			
352 - 582 - 20	Yellow		5/6	15/20	25/33	585			
353 - 583 - 20	Green		5/6	15/20	51/68	563			
352 - 584 - 21	Red		12	20	33	650			
352 - 585 - 21	Yellow		12	20	33	585			
352 - 586 - 21	Green		12	20	68	563			
				V	mA	mcd			