



Polysnap® Power Inlet Modules **BULGIN**

IEC Inlet - Vertical

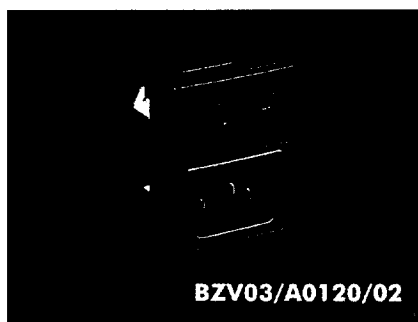

- Vertical Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Single Pole Switch or Neon Indicator Variations
- Filtered Inlet Option
- Options of O/I marked switches
- Non Fused

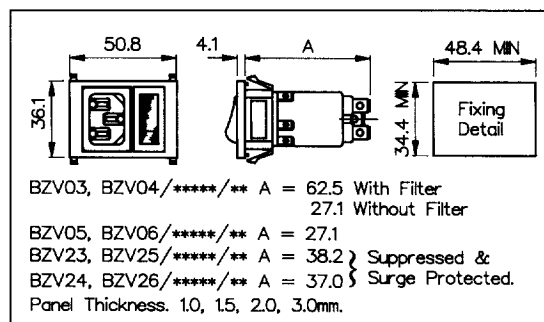

How to Order

BZV xx / xxxxx / xx

Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Power Inlet (cold condition), 6.3 or 2.8mm tabs: 03 = PX0575/63 04 = PX0575/28 Power Inlet (hot condition), 6.3 or 2.8mm tabs: 05 = PX0595/63 06 = PX0595/28 Suppressed Power Inlet (cold condition), 6.3 or 2.8mm tabs: 23 = PXS575/63 24 = PXS575/28 Surge Protected Power Inlet (cold condition), 6.3 or 2.8mm tabs: 25 = PXT575/63 26 = PXT575/28 Please note type 05 and 06 are not available in filtered version	Z0000 = Non Filtered Axxxx = Standard Bxxxx = Medical Cxxxx = High Performance Standard Dxxxx = High Performance Medical Exxxx = Earth Line Choke For Filtered inlet use 6th to 9th characters from filter ordering code see pages 75-79. E.g. BZV03/A0120/02	Single Pole Switch: 01 = S.P. Switch Single Pole Neon Switch: 02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch Neon Indicator: 03 = Red Neon Indicator Single Pole High Inrush Switch: 46 = S.P. High Inrush Switch Single Pole Switch Marked O/I: 69 = S.P. Switch (O/I) Single Pole Neon Switch Marked (O/I): 71 = S.P. Red Neon Switch (O/I) 74 = S.P. Green Neon Switch (O/I) Single Pole High Inrush Switch Marked (O/I): 98 = S.P. High Inrush Switch (O/I)

Note: For technical details of individual components please see page 54