

SCHOTTKY RECTIFIER

35 Amp

Major Ratings and Characteristics



Characteristics	25GQ045	Units
$I_{F(AV)}$ Rectangular waveform	35	A
V_{RRM}	45	V
I_{FSM} @ $t_p = 8.3ms$ sine	400	A
V_F @ 35Apk, $T_J = 125^\circ C$	0.84	V
T_J, T_{stg} Operating and storage	-55 to 150	$^\circ C$

Description/Features

The 22GQ045 Schottky rectifier has been expressly designed to meet the rigorous requirements of hi-rel environments. It is packaged in the hermetic, isolated, TO-254AA package and has extremely low reverse leakage at high temperature. Full MIL-PRF-19500 quality conformance testing is available on source controlled drawings to JANTX, JANTXV, or JANS levels. Typical applications include switching power supplies and resonant power converters.


- Hermetically sealed
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Electrically isolated
- Ceramic eyelets

CASE STYLE

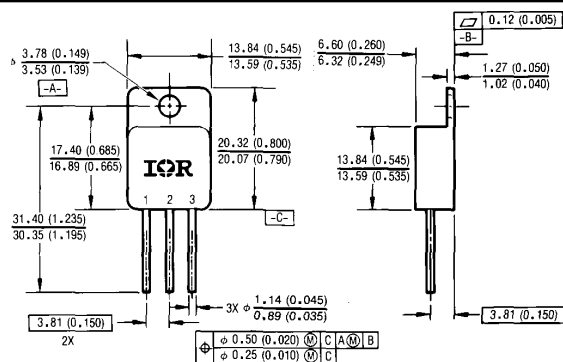

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANCI ANSI Y14.5M-1982
2. GLASS MENISCUS INCLUDED IN DIM D AND E.
3. CONTROLLING DIMENSION: INCH.



Conforms to JEDEC Outline TO-254AA*
Dimensions in millimeters and (inches)

Voltage Ratings

Part number	25GQ045
V_R Max. DC Reverse Voltage (V)	45
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	25GQ045	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current See Fig. 4	35	A	50% duty cycle @ $T_C = 100^\circ\text{C}$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non - Repetitive Surge Current	400	A	@ $t_p = 8.3$ ms sine





Electrical Specifications


Parameters	25GQ045	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) See Fig. 1 ①	0.93	V	@ 35A
	1.38	V	@ 70A
	0.84	V	@ 35A
	1.29	V	@ 70A
I_{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2 ①	0.80	mA	$T_J = 25^\circ\text{C}$
	45	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance	2600	pF	$V_R = 5V_{DC}$, (test signal range 100KHz to 1MHz) 25°C
L_S Typical Series Inductance	8.7	nH	Measured lead to lead 5mm from package body

Thermal-Mechanical Specifications

Parameters	25GQ045	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Leg)	1.00	$^\circ\text{C/W}$	DC operation See Fig. 5
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.21	$^\circ\text{C/W}$	Mounting surface, smooth and greased
w_t Weight (Typical)	9.3	g	
Die Description (Square)	0.200	inches	
Case Style	TO-254AA		JEDEC

① Pulse Width < 300 μs , Duty Cycle < 2%

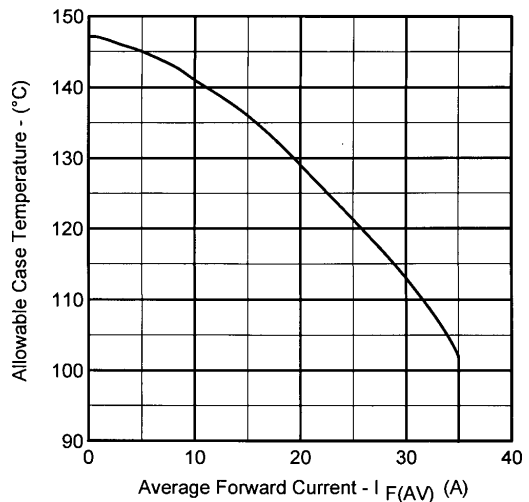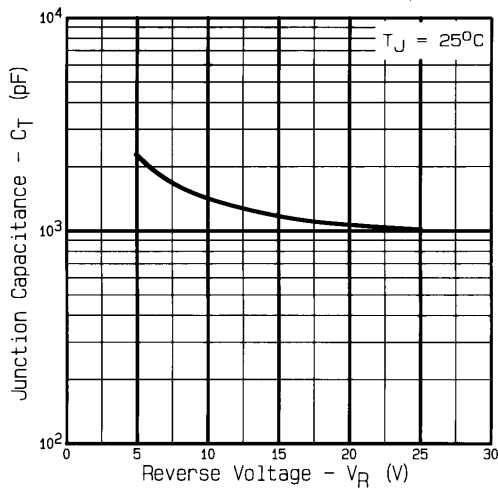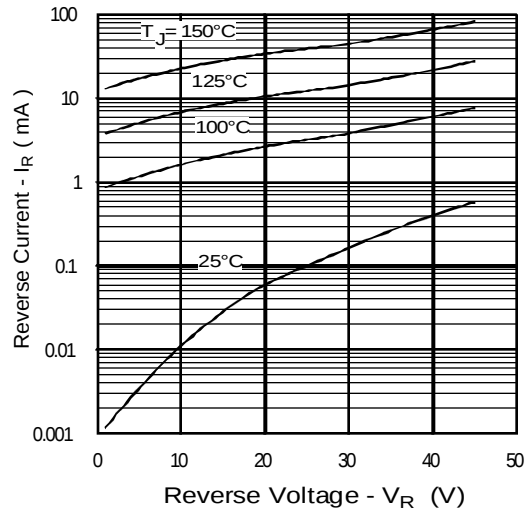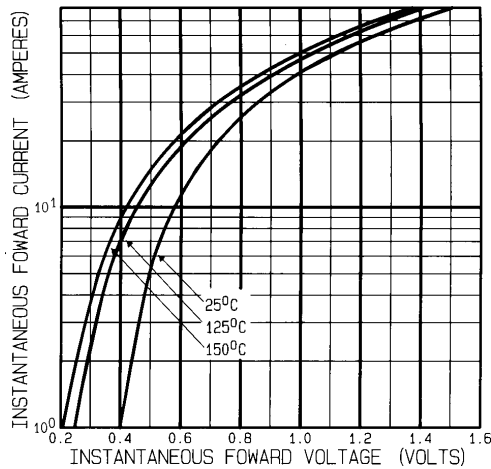

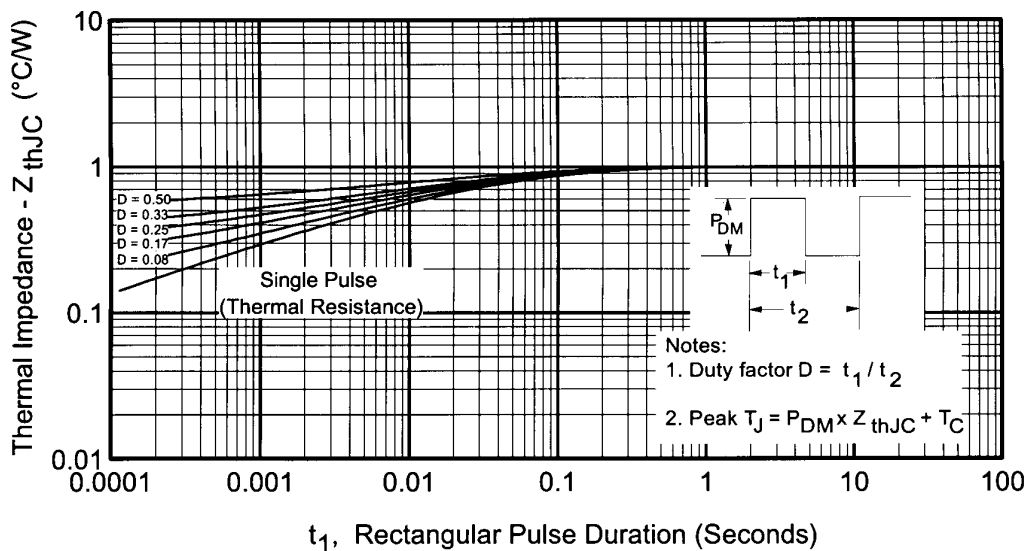Fig.5 - Max. Thermal Impedance Z_{thJC} characteristics (Per Leg)International
IOR Rectifier**WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331**EUROPEAN HEADQUARTERS:** Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020**IR CANADA:** 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111**IR FAR EAST:** K&H Bldg., 2F, 30-4 Nishi-Ikeburo 3-Chome, Toshima-Ku, Tokyo Japan 171 Tel: 81 3 3983 0086**IR SOUTHEAST ASIA:** 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371<http://www.irf.com/Data> and specifications subject to change without notice. 11/96