

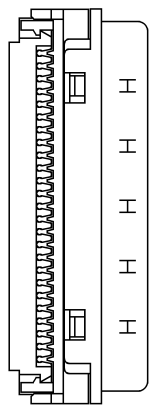

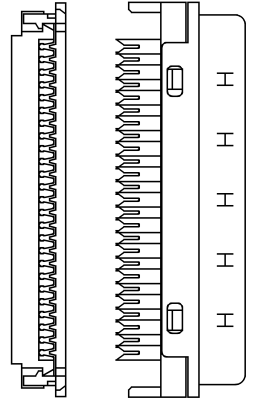
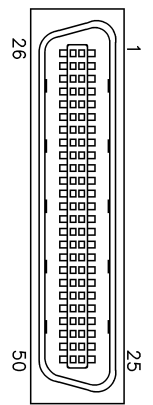

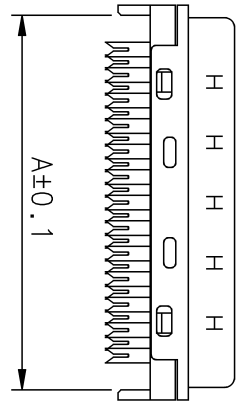
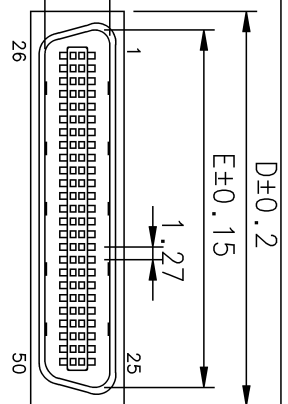



N D'ETUDE N OUTIL N CLIENT

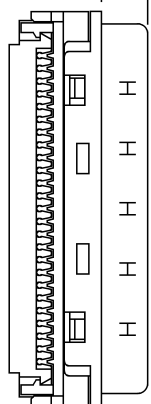

M Type
o (without hood.)



A Type
o (with hood.)

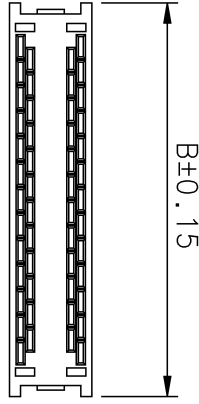


Termination Cover
(1 Places)

NO OF CONTACTS	A	B	C	D	E	F	G	H	I
14	14.38	16.38	11.81	16.45	12.80	6.46	4.60	8.50	13.10
20	18.10	20.10	14.90	20.00	16.60	6.40	4.60	9.30	13.10
26	22.00	24.00	18.70	24.00	20.40	6.46	4.60	9.30	13.10
36	28.35	30.35	25.21	30.40	26.70	6.46	4.60	8.50	13.10
50	37.30	39.30	34.10	39.30	35.60	6.46	4.60	9.30	13.70
68	48.73	50.70	45.50	50.60	46.95	6.46	4.60	9.30	13.60

FEATURES:

- Half pitch 1.27mm(.050") series
- Ribbon male connector I.D.C type for cable
- Assembly hood with plastic steel inner shell or Die-Cast metal hood
- Without hood with or without spring latch
- Fully EMI/RFI shielded
- MATERIALS:
 - Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
 - Contacts: Phosphor bronze gold selective plated
 - Shell: Steel nickel plated over copper
- ELECTRICAL:
 - Current Rating: 1 Amp
 - Insulation Resistance: >500M /Mn
 - Withstanding Voltage: AC 500V/r.m.s for 1 Minute
 - Contact Resistance: 35m WmΩx
 - Temperature Range: -55°C ~ +105°C

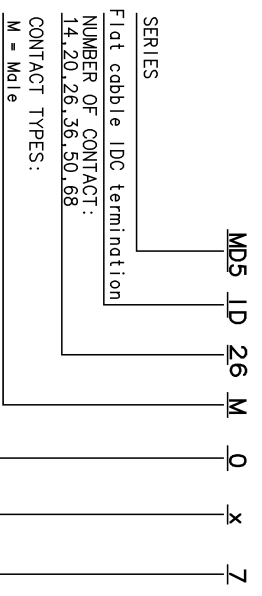

WIRE HOLDER:
5 = 0.62mm
7 = 0.75mm
9 = 0.9mm

Amphenol Socapex
Usine de Dole

ECH. ENS.		TOL. GEN.	
N SERIE		VOLUME PIECE	
DATE DU TIRAGE		SURFACE PIECE	
DESTINATION		PROTECTION	
MINI D SERIES		TRAITEMENT	
DOSSIER		MATIERE	
N INTERNE		CLIENT	
MDS ID XX M		CREATION PLAN	
		ATO	
		MODIFICATIONS EXEC.	
		DATE	
		Approb	
		IND.	