
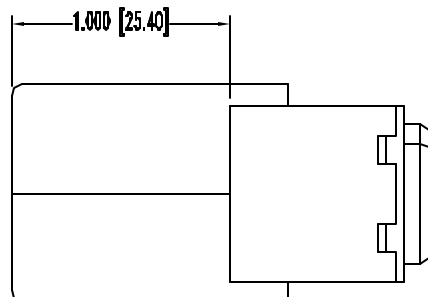
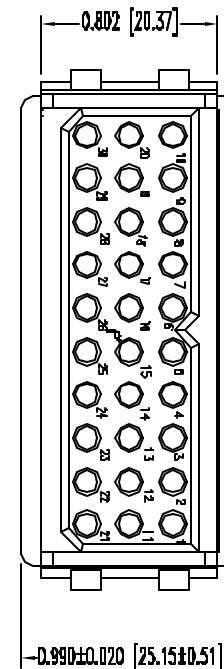


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYEES SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK4126

DATE	REV	REVISION RECORDED	APP	DR	CK
1-18-02	NC	ECO 18857		JLG	

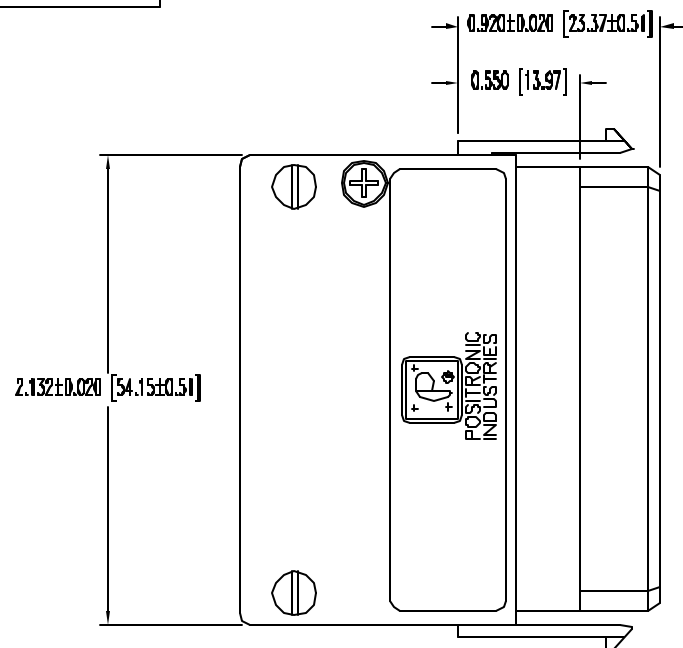

NOTES:

- MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0.  
HOOD: GLASS FILLED POLYESTER, UL 94V-0.
- ELECTRICAL CHARACTERISTICS:  
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.  
VOLTAGE PROOF: 2,000 V r.m.s. PER IEC 512-2, TEST 4a, METHOD C.  
WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> <a href="http://www.connectpositronic.com">www.connectpositronic.com</a>		SCALE	DRAWN BY
		PCS SERIES	J. GREEN
DECIMAL TOL.	TITLE		APPROVED BY
$\pm 0.015$ [0.38]	PLC30F7050		
WF # 4274	DATE	DRAWING NUMBER	REV.
ANGULAR TOL.	1-18-02	SK4126	NC