



Ribbon Series Connector, IDC Flat Cable, Female

Materials

Contact:

Phosphor Bronze

Insulator:

Polyester, Glass-filled

UL 94V-0, Black

Shell:

Steel Strip

Finishes


Contact:

Code A - Au Flash over
50 inches Ni undercoat

Code B - 30 inches Au
50 inches Ni undercoat

Notes:

Consult our factory
specialists for your
specific design needs.

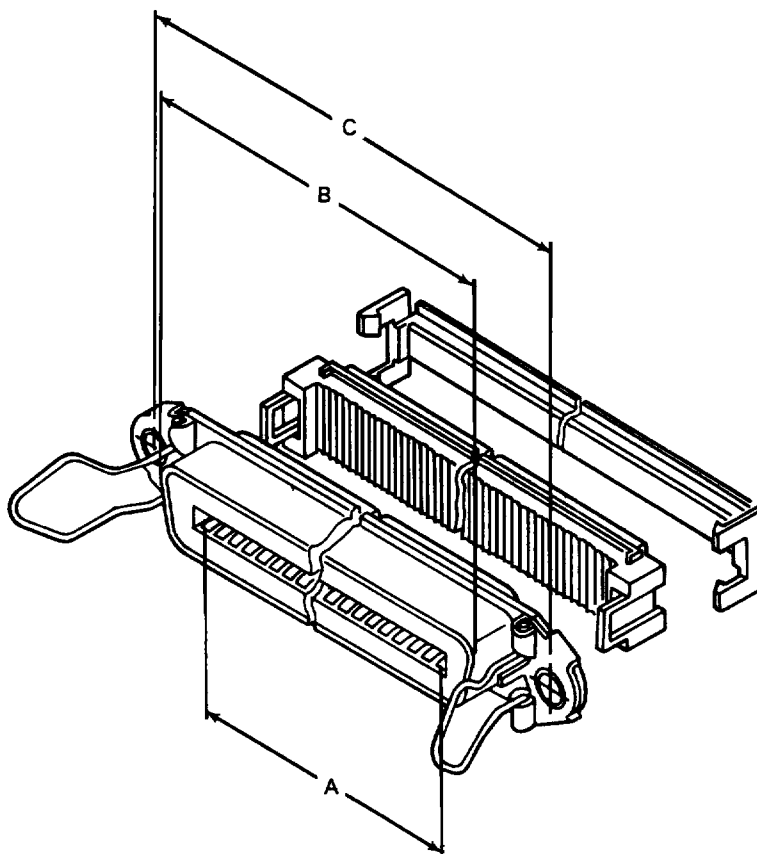

CONTACT POSITION	PLATING CODE	PART NUMBER		DIMENSION			
		WITHOUT S.R.	WITH S.R.	A	B	C	D
24	A	330-123-100	330-123-110	2.150	1.840	1.420	.940
	B	330-123-300	330-123-310	[54.70]	[46.78]	[35.95]	[23.76]
36	A	330-133-100	330-133-110	2.670	2.350	1.920	1.450
	B	330-133-300	330-133-310	[67.70]	[59.74]	[48.8]	[36.72]
50	A	330-153-100	330-153-110	3.260	2.950	2.530	2.040
	B	330-153-300	330-153-310	[82.80]	[74.85]	[64.25]	[51.84]