

Preliminary Specification



- ◆ 9x14mm Surface Mount Pkg.
- ◆ Differential PECL Outputs
- ◆ +3.3Vdc or +5.0Vdc Operation
- ◆ Sealed AT Strip Crystal
- ◆ Output Enable Function
- ◆ Low Phase Jitter: < 1.0 pSec RMS
- ◆ Excellent Solder Reflow Performance

Model 651
9x14mm Differential PECL
High Frequency Clock
(832MHz to 1.66GHz)

Electrical Characteristics

Parameter	Sym	Conditions	Min	Typical	Max	Unit
Power Requirements						
Power Supply	Vcc	± 5% 650L ±5% 650S	3.135 4.75	3.30 5.0	3.465 5.25	Vdc Vdc
Supply Current	Icc	Vcc=Max. (3.3Vdc) 50Ω. Load (5.0Vdc)		45 60		mA mA
Frequency Stabilities						
Center Frequency	f _{nom}		832	1244.16 1333.03	1664	MHz
Initial Tolerance	f _{cal}	Ta=+25°C	-10		+10	ppm
Freq. vs. Temp.	Δf/ΔTemp	Oper. Temp. Range			± 15	ppm
Freq. vs. Voltage	Δf/ΔVcc	Vcc ±5%		± 1		ppm
Freq. vs. Load	Δf/ΔRL	± 10% Variation		± 1		ppm
Freq. vs Time (Aging)	Δf/ΔTime	20 years			±10	ppm
Waveform Parameters						
Symmetry	Sym	@ 50% Level	45	50	55	%
Amplitude	Vo	50Ω Load	Vcc-1.62V		Vcc-1.025V	V
Rise/Fall Times	tr, tf	20% to 80%		225	350	pSec
Load	RL	Output to Vcc-2.0V or Equivalent		50		Ω
Phase Jitter		12KHz to 20MHz or 50KHz to 80MHz Bandwidth			<1	pSec RMS


Preliminary Specification

CTS
FREQUENCY PRODUCTS

Model 651
9x14mm Differential PECL
High Frequency Clock
(832MHz to 1.66GHz)

Mechanical Dimensions (mm):

- Pin Location:
 1] No Connection
 2] Enable/Disable
 3] GND
 4] RF output
 5] Complementary RF output
 6] Vcc, supply voltage

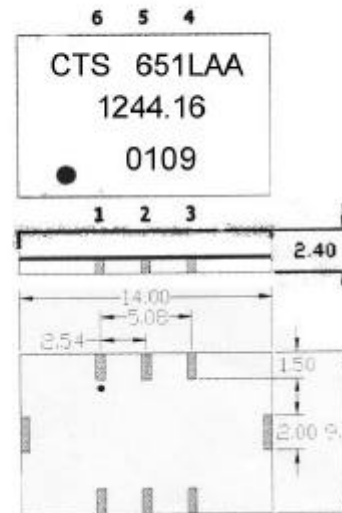

Option "A"
Enable Truth Table

Pin 2	Pins 4&5
Gnd.	Disabled
V _{cc}	Enabled
Open	Disabled


Option "B"
Enable Truth Table

Pin 2	Pins 4&5
Gnd.	Enabled
V _{cc}	Disabled
Open	Enabled

Environmental / Mechanical Specifications

Storage Temperature: -55° to +125°C
 Reflow Soldering: will withstand 240°C for 20 Seconds
 Shock: 1500 G's, 0.5 mSec. Pulse (3 Shocks/Axis)
 Vibration: 10 G's peak, 20 to 2000 Hz
 Case: High Temp FR-4 Base
 Seal: Non-Hermetic

Ordering Information

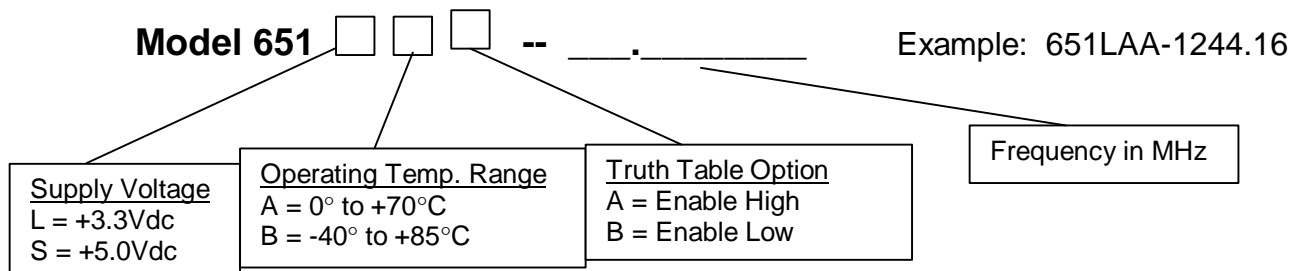

◆◆◆ CTS Frequency Products ◆ 400 W. North Street ◆ Carlisle, PA 17013 ◆ 717-243-5929 ◆◆◆

Rev 0