

Thru Hole VCXO

- Half-size dip package
- Tight symmetry option


Series **CV04**Part Numbering Example: **CV04 L - A3 B3 - 15.360 A P**

CV04	L	A3	B3	15.360	A	P
SERIES	VOLTAGE	OPERATING TEMP.	STABILITY	FREQUENCY	TUNING RANGE	LINEARITY
CV04	Blank = 5.0V L = 3.3V	A1=-10°C ~ +50°C A2=-10°C ~ +60°C A3=-30°C ~ +75°C A4=-40°C ~ +75°C A6=-0°C ~ +70°C	BC = ±100 ppm BP = ±50 ppm BR = ±25 ppm		A = ±50 ppm B = ±100 ppm C = ±150 ppm D = ±200 ppm E = ±250 ppm F = ±300 ppm G = ±350 ppm	Blank = ±20% Q = ±15% P = ±10%

Specifications:

Frequency Range:	1.000 MHz to 40.000 MHz
Available Stability Options:	±100 ppm ±50 ppm ±25 ppm
Output Series:	TTL/HCMOS
Input Voltage:	+5.0 VDC ±5% +3.3 VDC ±5%
Frequency Tuning Range:	±50 ppm Min. ±100 ppm Min. ±150 ppm Min. ±200 ppm Min. ±250 ppm Min. ±300 ppm Min. ±350 ppm Min.
External Control Voltage:	+2.5 VDC ±2.0 VDC (5V) +1.65 VDC @ ±1.35 VDC
Linearity:	±20% Max. ±15% Max. ±10% Max.
Polarity of Freq. Slope:	Positive
Output Voltage:	TTL V _{OL} =0.4 V Max. TTL V _{OH} =2.4 V Min. HCMOS V _{OL} =10%V _{DD} V Max. HCMOS V _{OH} =90%V _{DD} V Min.
Operating Temperature Range Options:	-0°C to +70°C -40°C to +85°C
Output Load:	10 TTL 15 pF HCMOS
Maximum Input Current:	20 mA (1.000 to 20.000 MHz) 40 mA (20.010 to 50.000 MHz) 50 mA (50.010 to 160.000 MHz)
Maximum Rise/Fall Time:	10 ns
Duty Cycle:	40/60% 45/55%
Max Start-Up Time:	10 ms
Storage Temperature:	-55°C to +125°C

CVO4

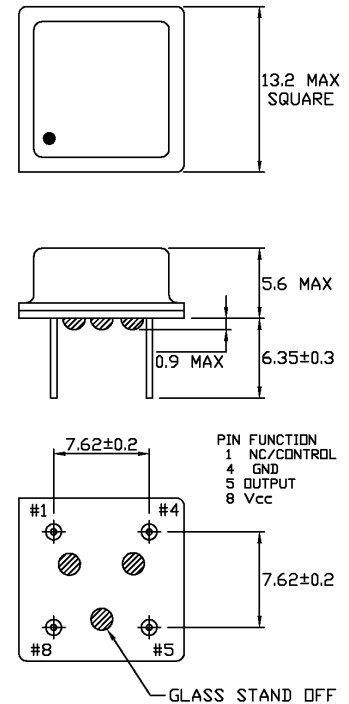

Cardinal Components, Inc.

155 Route 46 West

Wayne, NJ 07470

Rev: V-090414-13



TEL: (973)785-1333

E-MAIL: sales@cardinalxtal.com

WEB: http://www.cardinalxtal.com