


PROBE HEAD VARIANTS

 HARWIN PART NO. P25-1123	 HARWIN PART NO. P25-2223	 HARWIN PART NO. P25-0823	 HARWIN PART NO. P25-5623
 HARWIN PART NO. P25-1223	 HARWIN PART NO. P25-2323	 HARWIN PART NO. P25-4023	 HARWIN PART NO. P25-6023
 HARWIN PART NO. P25-1323	 HARWIN PART NO. P25-2423	 HARWIN PART NO. P25-5023	 HARWIN PART NO. P25-6123
 HARWIN PART NO. P25-0123	 HARWIN PART NO. P25-2523	 HARWIN PART NO. P25-5123	
 HARWIN PART NO. P25-0323	 HARWIN PART NO. P25-2623	 HARWIN PART NO. P25-5223	
 HARWIN PART NO. P25-0423	 HARWIN PART NO. P25-3323	 HARWIN PART NO. P25-5323	
 HARWIN PART NO. P25-2023	 HARWIN PART NO. P25-0623	 HARWIN PART NO. P25-5423	
 HARWIN PART NO. P25-2123	 HARWIN PART NO. P25-0723	 HARWIN PART NO. P25-5523	

NOTES:
 1. TO BE USED WITH SLEEVES S25-XX2.
 2. MINIMUM CENTRES = 2.54mm.
 3. MATERIALS AND FINISH:
 PLUNGER = HEAT TREATED BERYLLIUM COPPER, RHODIUM PLATED OVER HARD NICKEL
 BARREL = BRASS, GOLD PLATED
 SPRING = STAINLESS STEEL

SPECIFICATIONS:
 FULL TRAVEL = 420mm
 SPRING FORCE = 1.47N (150g) @ 3.50mm
 CURRENT RATING = 3 AMPS
 CONTACT RESISTANCE = 50 MILLIOHMS

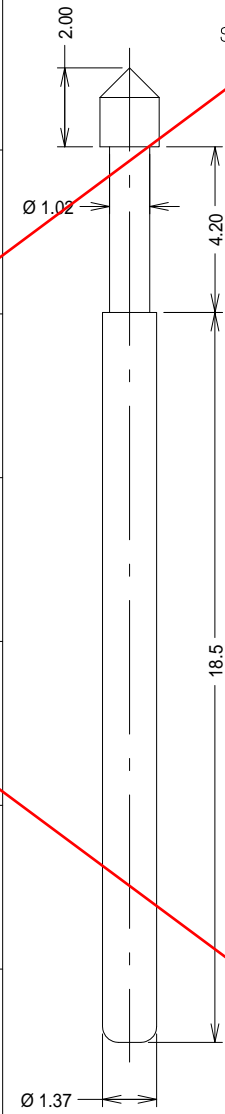

OBSOLETE

ORDER CODE:
 P25-XX23
 PROBE HEAD VARIANT (SEE TABLE)

CUSTOMER INFORMATION SHEET

1	14.01.97	----
ISS.	DATE	C/N
APPROVED:		
CHECKED:		
DRAWN: W. BOURNE		
CUSTOMER REF.		
ASSEMBLY DRG:		



HARWIN INC U.S.A. TEL: (812) 285 0055 FAX: (812) 285 0056	HARWIN PLC U.K. TEL: 01705 370451 FAX: 01705 314590	HARWIN PTE SINGAPORE TEL: 65 7794909 FAX: 65 7793888	HARWIN CONNECTORS KOREA TEL: 822 521 0747 FAX: 822 521 0749
--	--	---	--

TOLERANCES
 X = ±1mm
 XX = ±0.25mm
 XXX = ±0.10mm
 XXXX = ±0.01mm
 ANGLES = ±1°
 UNLESS STATED

MATERIAL:
 SEE NOTE 3
 FINISH:
 SEE NOTE 3
 S/AREA:
 mm

TITLE:
 2.54mm MIN. CENTRE
 TWO-PIECE SPRING PROBE
 DRAWING NUMBER:
 P25-XX23
 SHT 2 OF 2