
MU Type Fiber Optic Connectors

- Use of heat-shrink tube with adhesive for compatibility with Ø 1.6- Ø 2 mm cables
- ▶ Combined with MUZ-1A ferrule provides high performance





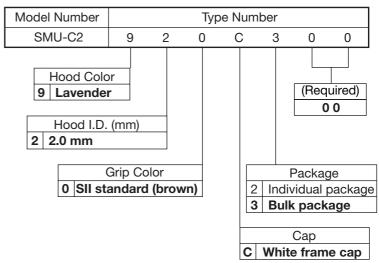

Housing

SMU-C2 Series

Designed for ø 2.0 mm Cable Single Mode



Housing

SMU-CN1 Series

Angle PC Application
Designed for
ø 0.9 mm Buffer Cable
Single Mode

- ▶ Plastic stop ring for simultaneous ease of assembly, mechanical (twisting) strength and light weight
- ▶ Combined with MUNZ-1A ferrule provides high performance
- ▶ Green colored body signifies Angle PC application
- ➤ Satisfies Vertical Burning Test for Classification Materials UL94V-0 (excluding cap)

ORDERING INFORMATION

