


- All DIP sockets accept 0,38 - 0,64mm dia. and standard IC leads.
- Lubricated contacts also available. (See page 96 for specs.)
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #1001 pin. See page 134 for details.

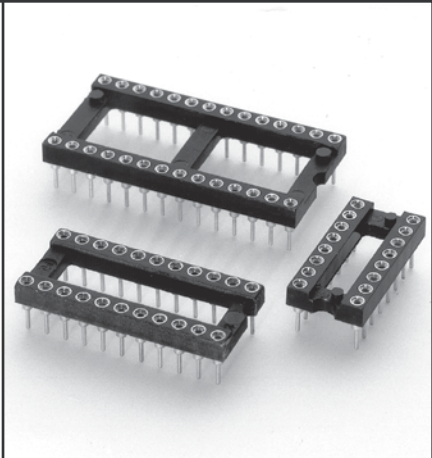

<b>Total number of pins</b>				<b>Quantity per tube</b>	<b>Ordering Information</b>			
	<b>A</b>	<b>B</b>	<b>C</b>					

10	12,6	5,08	7,6	40
4	5,0	7,62	10,1	102
6	7,6	7,62	10,1	67
8	10,1	7,62	10,1	50
10	12,6	7,62	10,1	40
14	17,7	7,62	10,1	28
16	20,3	7,62	10,1	25
18	22,8	7,62	10,1	22
20	25,3	7,62	10,1	20
22	27,8	7,62	10,1	18
24	30,4	7,62	10,1	16
28	35,5	7,62	10,1	14
20	25,4	10,16	12,7	20
22	27,8	10,16	12,7	18
24	30,4	10,16	12,7	16
28	35,5	10,16	12,7	14
32	40,6	10,16	12,7	12
24	30,5	15,24	17,7	16
28	35,5	15,24	17,7	14
32	40,6	15,24	17,7	12
36	45,7	15,24	17,7	11
40	50,8	15,24	17,7	10
42	53,3	15,24	17,7	9
48	60,9	15,24	17,7	8
50	63,5	15,24	17,7	8
52	66,0	15,24	17,7	7
50	63,5	22,86	25,3	8
52	66,0	22,86	25,3	7
64	81,2	22,86	25,3	6

**XX= Plating Code  
See Below**

**For RoHS compliance, select  $\diamond$  plating code. For the all gold option (XX=13) also change part number from 110-XX-XXX-41-001000 to 110-13-XXX-41-001100**



- 110-XX-210-41-001000
- 110-XX-304-41-001000
- 110-XX-306-41-001000
- 110-XX-308-41-001000
- 110-XX-310-41-001000
- 110-XX-314-41-001000
- 110-XX-316-41-001000
- 110-XX-318-41-001000
- 110-XX-320-41-001000
- 110-XX-322-41-001000
- 110-XX-324-41-001000
- 110-XX-328-41-001000
- 110-XX-420-41-001000
- 110-XX-422-41-001000
- 110-XX-424-41-001000
- 110-XX-428-41-001000
- 110-XX-432-41-001000
- 110-XX-624-41-001000
- 110-XX-628-41-001000
- 110-XX-632-41-001000
- 110-XX-636-41-001000
- 110-XX-640-41-001000
- 110-XX-642-41-001000
- 110-XX-648-41-001000
- 110-XX-650-41-001000
- 110-XX-652-41-001000
- 110-XX-950-41-001000
- 110-XX-952-41-001000
- 110-XX-964-41-001000

**For Lubricated Contacts, change part number from 110-XX-XXX-41-001000 to 110-99-XXX-41-361000 (To be used with "99" plating code only)**

SPECIFY PLATING CODE XX=	13 $\diamond$	91	93	99	41 $\diamond$	43 $\diamond$	44 $\diamond$
Sleeve (Pin)	0,25 $\mu$ m Au	5,08 $\mu$ m Sn/Pb	5,08 $\mu$ m Sn/Pb	5,08 $\mu$ m Sn/Pb	5,08 $\mu$ m Sn	5,08 $\mu$ m Sn	5,08 $\mu$ m Sn
Contact (Clip)	0,76 $\mu$ m Au	0,25 $\mu$ m Au	0,76 $\mu$ m Au	5,08 $\mu$ m Sn/Pb	0,25 $\mu$ m Au	0,76 $\mu$ m Au	5,08 $\mu$ m Sn