


NUMBER 173484
METRIC
3rd ANGLE PROJECTION

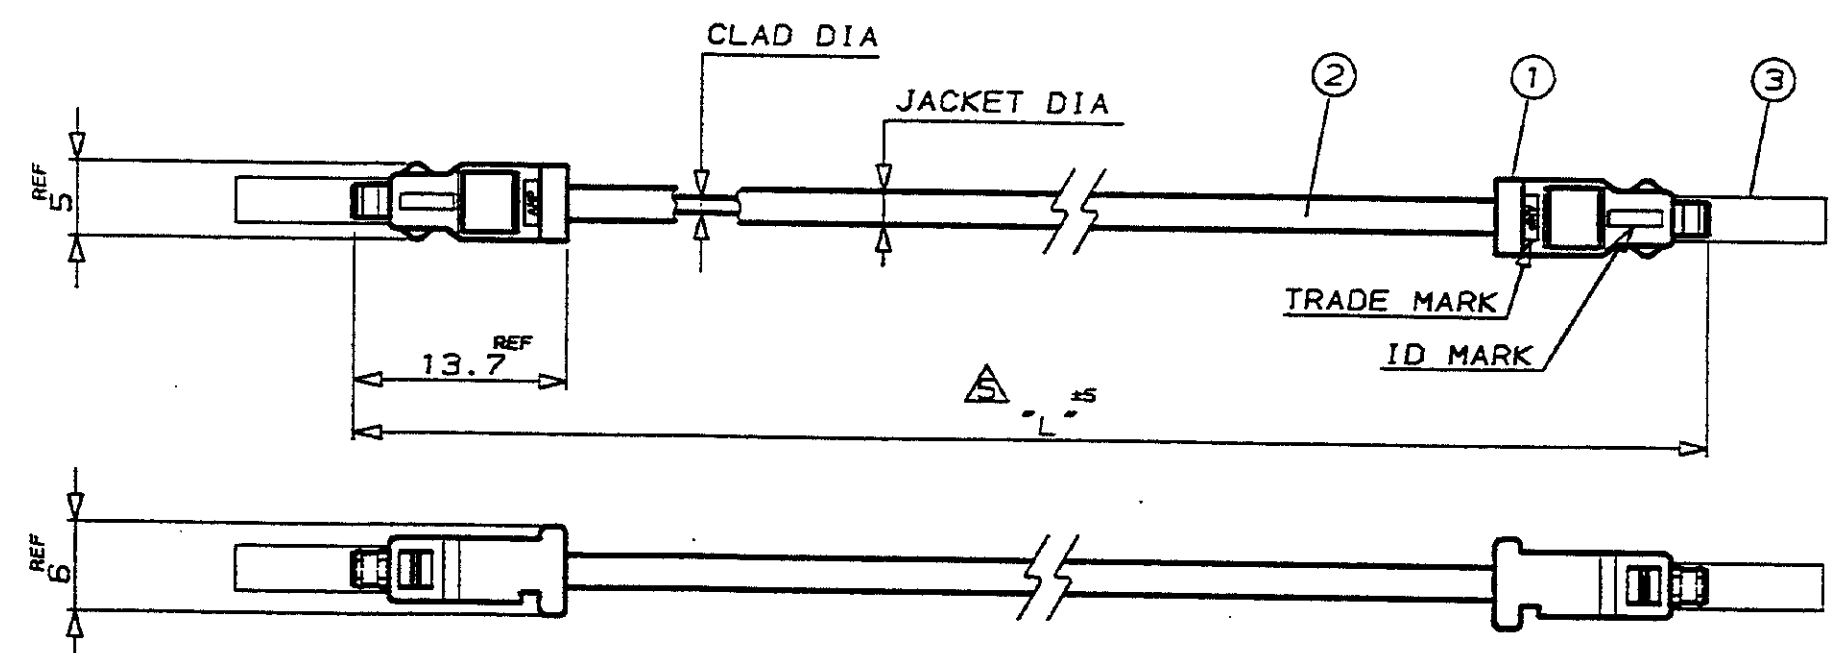

NOTE: 1 OPTICAL POWER ATTENUATION IS 1.0dB MAX
COMPARE WITH MASTER CABLE ASS'Y
(マスターケーブルと比較した光パワーの損失は1.0dB以下とする)
2 CABLE RETENTION FORCE FOR PLUG (ケーブル保持力)
FIBER CABLE 0.5φX1.5φ: 1.5Kg MIN
0.75φX1.8φ: 4.0Kg MIN
0.75φX2.2φ: 4.0Kg MIN
1.0φX2.2φ: 5.0Kg MIN
3 FIBER CABLE ENDS TREATED BY HOT-PLATE FINISHING
(ファイバー端面はホットプレート処理)
4 STORAGE CONDITION (保存条件)
MINIMUM BENDING RADIUS: 100mm (最小曲げ半径)
STORAGE TEMPERATURE: -40-85°C (保存周囲温度)
△ [TABLE 1] INDICATES THE RELATION BETWEEN P/N AND LENGTH "L"
(表1にP/Nと長さ"L"の関係を表す)

TABLE 1

(DIMENSION, mm)

9- -9 990	7- -9 790	5- -9 590	4- -9 490	2- -9 290
9- -8 980	7- -8 780	5- -8 580	4- -8 480	2- -8 280
9- -7 970	7- -7 770	5- -7 570	4- -7 470	2- -7 270
9- -6 960	7- -6 760	5- -6 560	4- -6 460	2- -6 260
9- -5 950	7- -5 750	5- -5 550	4- -5 450	2- -5 250
9- -4 940	7- -4 740	5- -4 540	4- -4 440	2- -4 240
9- -3 930	7- -3 730	5- -3 530	4- -3 430	2- -3 230
9- -2 920	7- -2 720	5- -2 520	4- -2 420	2- -2 220
9- -1 910	7- -1 710	5- -1 510	4- -1 410	2- -1 210
9-17mm-0 900	7-17mm-0 700	5-17mm-0 500	4-17mm-0 400	2-17mm-0 200
PART No. L	PART No. L	PART No. L	PART No. L	PART No. L

③	PROTECTION TUBE	2	NA=0.47 (開口数)	1.0	2.2	100-22	*-173490-*
②	FIBER CABLE	△		0.75	2.2	75-22	*-173488-*
①	Mini-DNP PLUG ASS'Y	2		0.75	1.8	75-18	*-173486-*
③	PROTECTION TUBE	2		0.5	1.5	50-15	*-173484-*
②	FIBER CABLE	△	ATTENUATION =0.22dB/m (伝送損失)	0.75	1.8	75-18	*-173486-*
①	Mini-DNP PLUG ASS'Y	2					
③	PROTECTION TUBE	2	OPET TEMP. =-40-85°C (使用温度)	0.5	1.5	50-15	*-173484-*
②	FIBER CABLE	△					
①	Mini-DNP PLUG ASS'Y	2					
ITEM	DESCRIPTION	Qty	PERFORMANCE	CLAD DIA	JACKET DIA	ID MARK	PART NUMBER
			FIBER CABLE				

© 1986 BY AMP (Japan) LTD.
ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS
AND OR PATENTS PENDING

WIRE RANGE: mm² (AWG -) INSULATION DIA: mm NAME: Mini-DNP SIMPLEX FIBER CABLE ASS'Y
MATERIAL: FINISH: 0.5φ EXTRA GRADE (L=100-990mm)

GENERAL TOLERANCE: 0-40 10: ±0.2 10-40 30: ±0.25 30-40 100: ±0.3 ANGLES: ±3°

SIZE: A3 LOC: J NUMBER: 173484

SCALE: 2-1 REV: 01 SHEET: 1 OF 1

LTR: REVISION RECORD DR: CHK: DATE: DR: H. SHOJI DE: H. SHOJI APP: E. YOSHIDA

CUSTOMER DRAWING

- | | |
|--|--|
|  | Home |
|  | Part Number Search |
|  | Text Search |
|  | Alternate Part Search |
|  | Multiple Part Comparison |
|  | Alphabetical Search |
|  | Brand Search |
|  | Industry Product Search |
|  | Product Type Search |
|  | Product Family Search |
|  | Competitor Cross Reference |
|  | Document Number Search |
|  | Lead Free Solutions |
|  | Help/Glossary |

[View All Tyco Electronics Brands](#)

Click to activate links to all other products

☐ Plastic Fiber Components

1-173484-0 -- 5 of 6 products

Active

(Tyco Electronics P/N: 1-173484-0)

Step Search Screen

General Information

Product Availability

■ **Customer Drawing: 173484, Rev. 01**

Document Title: MINI DNP SIMPLEX FIBER CABLE ASSY,
0.5 EXTRA GRADE (L=100 990MM)

165823.pdf [165823.pdf](#) (81K)

The photographs and/or line drawings below are representative images of a product for viewing purposes only.

Product Usage

Searchable Features:

Brand:	AMP
Product Type:	Cable Assembly
Connector Type:	Mini-DNP
No. of Positions:	Single
Gender:	Plug
Cable Length (mm [in]):	99.06 [3.900]
Fiber Size (Micron):	0.5 mm

Jacket Outer Diameter (mm [in]):

1.50 [.059]

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)