



ASH-83 Series Pitch 8.25mm

Specifications


BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 14-18 STR.
 RATING: 15 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE


ASH-831

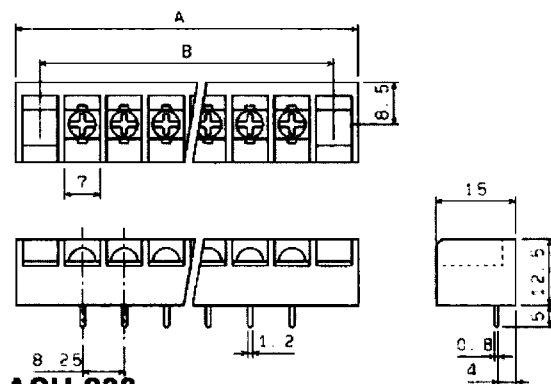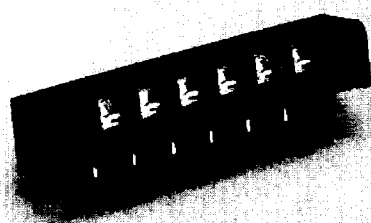



ASH-833

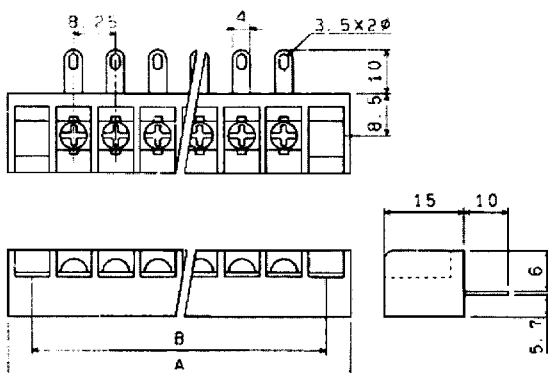

ASH-832


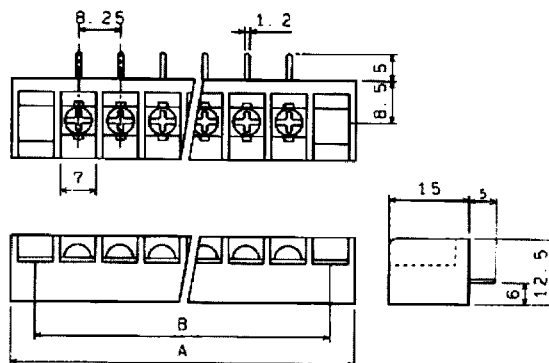


ASH-834

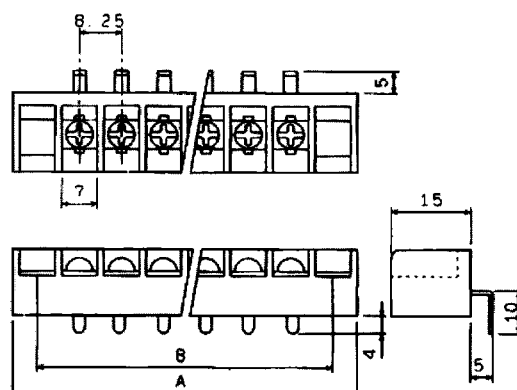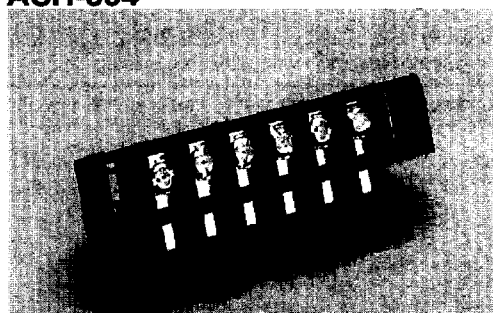

ASH-83 Series Continued....

ASH-835

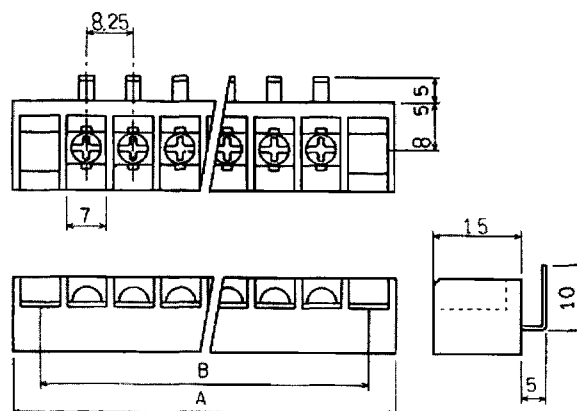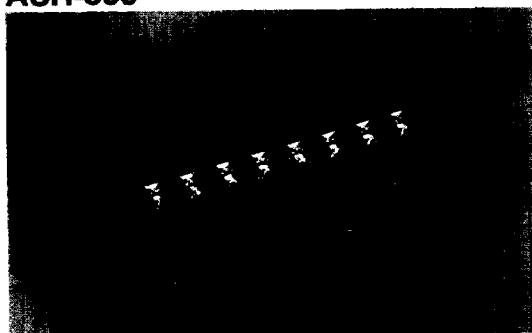

DIMENSION: $\pm 0.8\text{mm/m}$

Pins	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	35.00	43.25	51.50	59.75	68.00	76.25	84.50	92.75	101.00	109.25	117.50	125.75	134.00	142.25	150.50	158.75
B	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50	123.75	132.00	140.25	148.50

Pins	18	19	20	21	22	23	24	25	26	27	28	29	30
A	167.00	165.25	183.50	191.75	200.00	208.25	216.50	224.75	233.00	241.25	249.50	257.75	266.00
B	156.75	165.00	173.25	181.50	189.75	198.00	206.25	214.50	222.75	231.00	239.25	247.50	255.75