

Features

- Small Size, Low Profile
- Superior Repeatability (Lot-to-Lot Variation)
- Typical Isolation: 28 dB
- Typical Insertion Loss: 0.7 dB
- Low Cost
- 1 Watt Power Handling
- Lead-Free SOIC-16 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of DS55-0003

Description

M/A-COM's MAPDCC0015 is an IC-based monolithic power divider using M/A-COM's GMIC technology in a low cost SOIC-16 plastic package. This 5-way power divider is ideally suited for applications where PCB real estate is at a premium and part count reduction and cost are critical. Typical applications include base station switching networks and other cellular equipment, including subscriber units. Available in tape and reel.


The MAPDCC0015 is fabricated using a passive-integrated circuit process. The process features full-chip passivation for increased performance and reliability.

Ordering Information

| Part Number | Package |
|---------------|-------------------|
| MAPDCC0015 | Bulk Packaging |
| MAPDCC0015-TR | 1000 piece reel |
| MAPDCC0015-TB | Sample Test Board |

Note: Reference Application Note M513 for reel size information.

Functional Block Diagram

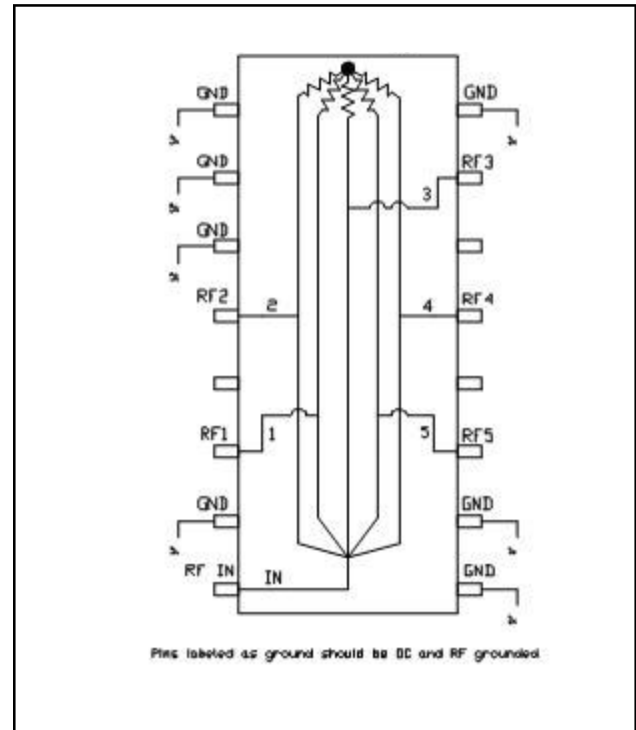

Pin Configuration

| Pin No. | Function | Pin No. | Function |
|---------|----------|---------|----------|
| 1 | GND | 9 | GND |
| 2 | GND | 10 | GND |
| 3 | GND | 11 | RF5 |
| 4 | RF2 | 12 | GND |
| 5 | GND | 13 | RF4 |
| 6 | RF1 | 14 | GND |
| 7 | GND | 15 | RF3 |
| 8 | RF IN | 16 | GND |

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Low Cost Five-Way GMIC SMT Power Divider 1850-1990 MHz

M/A-COM Products
Rev. 2

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

| Parameter | Units | Min | Typ | Max |
|----------------------------|-------|-----|-------|-------|
| Insertion Loss Above 7.0dB | dB | — | 0.7 | 1.2 |
| Isolation | dB | 21 | 28 | — |
| VSWR Input | — | — | 1.5:1 | 1.6:1 |
| VSWR Output | — | — | 1.2:1 | 1.5:1 |
| Amplitude Balance | dB | — | 0.2 | 0.5 |
| Phase Balance | ° | — | 6 | 12 |


Absolute Maximum Ratings^{1,2}

| Parameter | Absolute Maximum |
|--------------------------|------------------|
| Input Power ⁴ | 1 W CW |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -65°C to +150°C |


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.
- With Internal load dissipation of 0.125 W maximum.

Typical Performance Curves

Insertion Loss vs. Frequency
(Dashed lines show amplitude balance window)

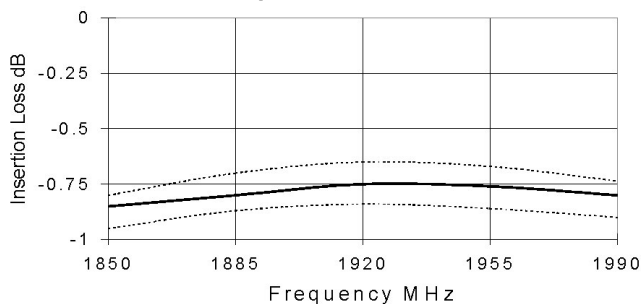

Isolation vs. Frequency

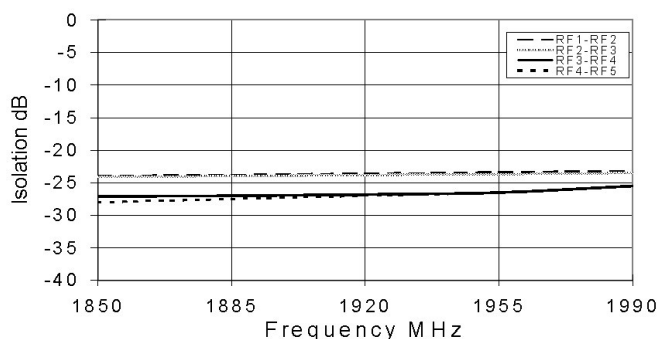


Handling Procedures

Please observe the following precautions to avoid damage:


Static Sensitivity

GMIC Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

VSWR vs. Frequency

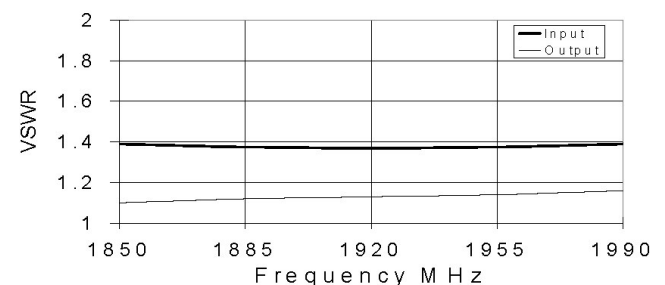

Phase Balance vs. Frequency
(Relative RF1)

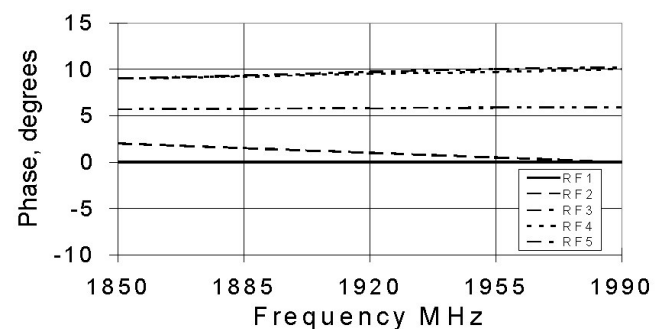

ADVANCED: Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


- North America** Tel: 800.366.2266 / Fax: 978.366.2266
 - Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macom.com for additional data sheets and product information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Low Cost Five-Way GMIC SMT Power Divider 1850-1990 MHz

M/A-COM Products
Rev. 2

Lead-Free, SOIC-16[†]

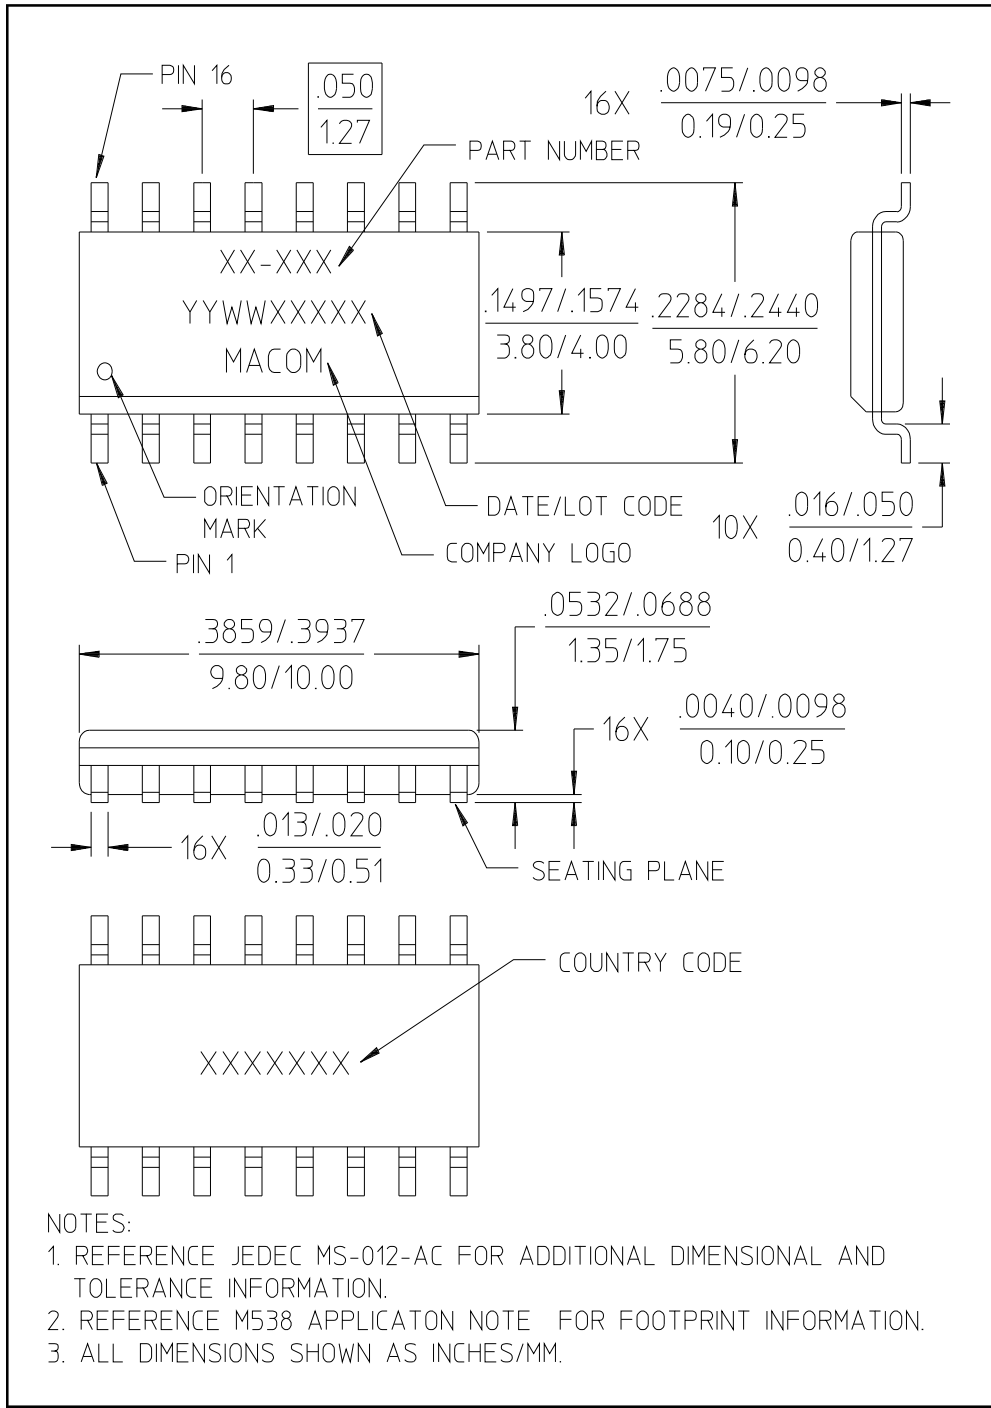

[†] Reference Application Note M538 for lead-free solder reflow recommendations.

ADVANCED: Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.