

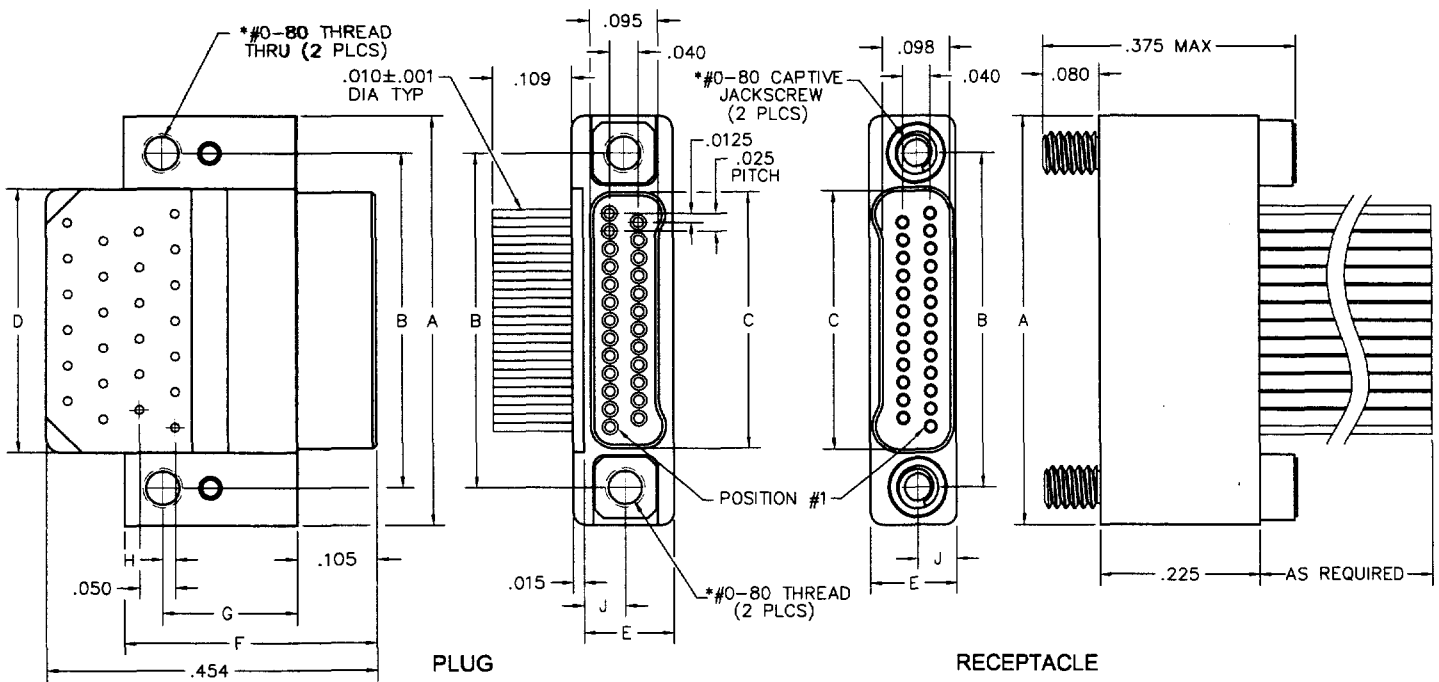


2 · ROW
Cable to Board
Right Angle PTH
.025"
NM, NK
9 thru 85 Contacts

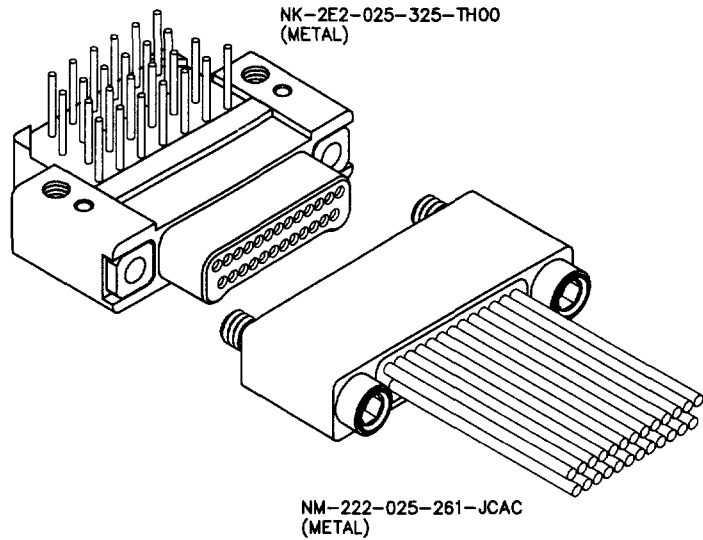

SIZE	A	B	C		D	E	F	G	H	J	*HARDWARE
			PLUG	RCPT							
9	.375	.270	.160	.163	.170						
15	.450	.345	.235	.238	.245						
21	.525	.420	.310	.313	.320						
25	.575	.470	.360	.363	.370						
31	.650	.545	.435	.438	.445	.125	.345	.187	.018	.0575	#0-80 THREAD
37	.725	.620	.510	.513	.520						
51	.900	.795	.685	.688	.695						
65	1.075	.970	.860	.863	.870						
69	1.125	1.020	.910	.913	.920						
85	1.377	1.246	1.110	1.113	1.120	.150	.410	.244	.075	.0700	#2-56 THREAD



PLUG: NK-2E2-025-325-TH00
 RECEPTACLE: NM-222-025-261-JCAC
 XX-XXX-XXX-XXX-XXXX

PLUG		RECEPTACLE	
SERIES			
NK .025" Metal PC Board Mounted Connector		NM .025" Metal I/O Connector	
BODY			
2 2-Row		2 2-Row	
BODY STYLE:		BODY STYLE:	
E Plug, right angle, plated thru hole (PTH)		2 Receptacle, straight	
BODY MATERIAL:		BODY MATERIAL:	
2 Liquid Crystal Polymer w/ electroless nickel shell		2 Liquid Crystal Polymer w/ electroless nickel shell	
3 Liquid Crystal Polymer w/ electrodeposited cadmium shell		3 Liquid Crystal Polymer w/ electrodeposited cadmium shell	
SIZE			
XXX Number of contacts (009, 015, 021, 025, 031, 037, 051, 065, 069 or 085)		XXX Number of contacts (009, 015, 021, 025, 031, 037, 051, 065, 069 or 085)	
CONTACTS			
TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
32 Pin, right angle, dip solder, .109"		26 Socket, straight, crimped wire	
33 Pin, right angle, dip solder, .140"			
34 Pin, right angle, dip solder, .172"			
PLATING OPTIONS:		PLATING OPTIONS:	
5 50 u" Au contacts; 100 u" Sn terminations		1 50 u" Au contacts	
HARDWARE			
STYLE OF HARDWARE:		STYLE OF HARDWARE:	
00 None		00 None	
TH Threaded hole, #0-80 UNF*		JC Turning jackscrews, captivated #0-80*	
WIRING OPTIONS:		WIRING OPTIONS:	
00 None		XX See wiring codes, Page N-51	

* = #2-56 hardware on 85 position connectors