
NOTES:

1 | 2 3

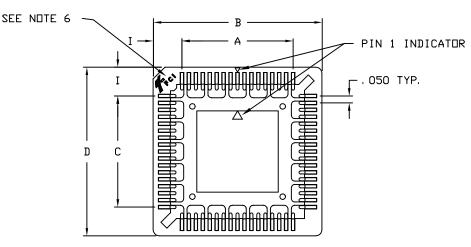

NDTE: 'PLCC-68P-T-SMT-P' SDCKET SHOWN

.060(2X) . 175 SEE NOTE 2 Ø.060±.002(2PLACES) OPTIONAL ALIGNMENT PEG

4. MATERIALS: A. CONTACT MATERIAL: PHOSPHOR BRONZE B. CONTACT PLATING: 150 u' MIN. TIN OVER 40 u' MIN. NICKEL

THESE SUCKETS ARE PROVIDED BOTH WITH AND WITHOUT THE ALIGNMENT

2. THE LEAD FEET BOTTOM SURFACES SHALL BE COPLANAR WITH RESPECT TO ONE ANOTHER WITHIN .004. NO PART OF THE PLASTIC INSULATOR SHALL PROTRUDE BEYOND THE LEAD FEET PLANE, WITH THE EXCEPTION

3. THESE SOCKETS ARE DESIGNED FOR USE WITH PLASTIC LEADED CHIP CARRIERS (PLCC'S) THAT MEET THE DIMENSIONAL REQUIREMENTS OF JEDEC PUBLICATION 95, FOR PACKAGE NUMBERS MO-047 AA-AH &

PEGS IN THE TUBE FORMAT. SOCKETS WITHOUT THE ALIGNMENT PEGS ARE ALSO AVAILABLE IN TAPE & REEL FORMAT. SOCKET'S PART NUMBER AND

SOCKET DIMENSIONS ARE LISTED IN THE TABLE ON SHEET 2.

FOR PACKAGING DIMENSIONS PLEASE SEE SHEET 3 AND SHEET 5.

C. INSULATOR: PPS, HIGH TEMP., UL 94V-0

MD-052 AA-AE (RECTANGULAR PACKAGES).

OF THE OPTIONAL ALIGNMENT PEGS.

5. PERFORMANCE:

A. TEMPERATURE RANGE: -55° C TO 125° C

B. CONTACT RESISTANCE: 20 MILLIOHMS MAX.

C. INSERTION FORCE: SEE TABLE

D. EXTRACTION FORCE: SEE TABLE

E. DIELECTRIC WITHSTANDING VOLTAGE: 600 VOLTS RMS FOR 60 SEC.

1 | 2

F. DURABILITY: 25 CYCLES MINIMUM.


G. WEIGHT: SEE TABLE

6 FCI LOGO LOCATION

mat	'l. co	de				tolerances unless otherwise specified								MER	Electronics									
ltr	ecn	no	dr	date	е							1	COP			F	CI			www.f	cicon	nect.co	om	
Α	V11	675	CRG	6/8	3/01	linea	ır 🗀	.x	XX±	.008		proj	ection	1	title							_		1
В	V12	144	CRG	8/1	5/01						─			-1	SURFACE MOU						П			
С	V12	2551	CRG	10/2	22/01	angl	es		0° ±	:2°		l d	י ע	V			PL	<u>CC</u>	SC	<u>)Ck</u>	(ET			
D	V12	858	CRG	12/2	20/01	dr	C.	GINGR	ICH	6/8	/01		INCH	1	produ				PLC	С		cod	е	1
						engr	gr D.WHITING 6			6/8	/01	-		_	size	dwg	no] .	_	
						chr	D	.WHITI	NG	6/8	3/01	scal			امدا		$\overline{}$	00	00	1		she	et	1
						appd	D	.WHITI	NG	6/8	3/01		NTS	;	A4		\mathcal{L}	9	JU	ı		1	of 6	
she	et	revis	ion	D	D	D	D	D	D]
inde	ex sheet 1 2 3 4 5 6																	1						
	ACAD											3					cage		526	5			4	_

PDM: Rev:D

STATUS:Released Printed: Jan 21, 2006

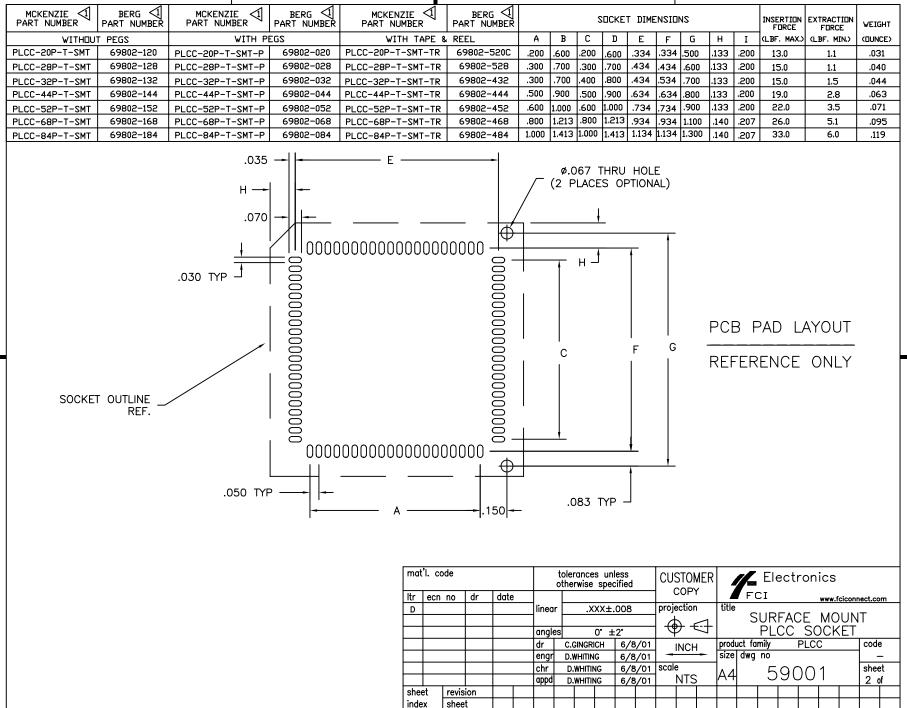

ACAD

2

2

1

1 1

PDM: Rev:D

status:Released

3


cage code

22526

3 |

Printed: Jan 21, 2006

4

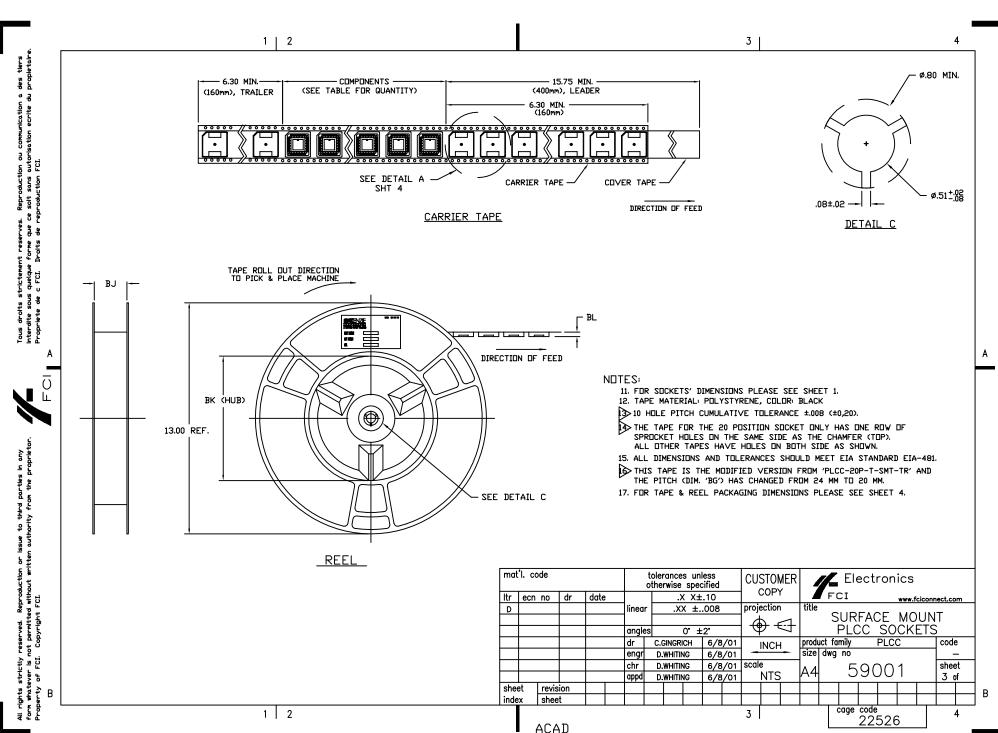

PDM: Rev:D


status:Released

Printed: Jan 21, 2006

16>


authori		
written		
without	ij	
orm whatever is not permitted without written authori	roperty of FCI. Copyright FCI.	
ls not	ro: o	
whatever	erty of	E
Ę	Ş	

MCKENZIE	BERG			P#	ACKAC	ING	DIMEN	NDISI	2			QTY./REEL
PART NUMBER	PART ND.	BA	ВВ	BD	BE	BF	₿G	ВН	BJ	BK	BL	
PLCC-20P-T-SMT-TR	69802-520C	0.630	0.630		0.453	0.945	0.945	0.059	0.976	4.00	.220	470
TEGG EGI T GITI TK	0,000 0200	(16,00)	(16,00)		(11,50)	(24,00)	(24,00)	(1,50)	(24,80)(100.0		(5,58)	1,0
PLCC-28P-T-SMT-TR	69802-528	0.732	0.732	1.118	0.559	1.260	0.945	0.094	1.291	4.00	.252	390
FECC-EOF-1-SMI-IK	6760E-JE6	(18,60)	(18,60)	(28,40)	(14,20)	(32,00)	(24,00)	(2,40)	(32,80)	(100.0)	(6,40)	370
PLCC-32P-T-SMT-TR	69802-432	0.740	0.839	1.118	0.559	1.260	0.945	0.098	1.291	4.00	.252	390
TECC SEL T SMITTK	0700E-43E	(18,80)	(21,30)	(28,40)	(14,20)	(32,00)	(24,00)	(2,50)	(32,80)	(100.0)	(6,40)	370
PLCC-44P-T-SMT-TR	69802-444	0.937	0.937	1.591	0.795	1.732	1.260	0.098	1.764	7.00	.252	250
1 200 441 1 3111 11	0300L 444	(23,80)	(23,80)	(40,40)	(20,20)	(44,00)	(32,00)	(2,50)	(44,80)	(177.8)	(6,40)	230
PLCC-52P-T-SMT-TR	69802-452	1.031	1.031	1.591	0.795	1.732	1.260	0.098	1.764	7.00	.252	250
TECC SEL T SHI TK	0700L 43L	(26,20)	(26,20)	(40,40)	(20,20)	(44,00)	(32,00)	(2,50)	(44,80)	(177.8)	(6,40)	230
PLCC-68P-T-SMT-TR	69802-468	1.236	1.236	1.591	0.795	1.732	1.417	0.098	1.764	7.00	.252	220
FLCC-66F-1-3M1-1K	6760E-466	(31,40)	(31,40)	(40,40)	(20,20)	(44,00)	(36,00)	(2,50)	(44,80)	(177.8)	(6.40)	220
PLCC-84P-T-SMT-TR	69802-484	1.429	1.429	2.063	1.031	2.205	1.575	0.098	2.236	7.00	.252	200
FLCC-04F-1-3M1-1K	0 2002 - 404	(36,30)	(36,30)	(52,40)	(26,20)	(56,00)	(40,00)	(2,50)	(56,80)	(177.8)	(6,40)	200
DI CC 20D T SHT TD M	69802-520	0.630	0.630		0.453	0.945	0.787	0.094	0.976	4.00	.252	400
PLCC-20P-T-SMT-TR-M	67602-320	(16,00)	(16,00)		(11,50)	(24,00)	(20,00)	(2,40)	(24,80)	(100.0)	(6,40)	490

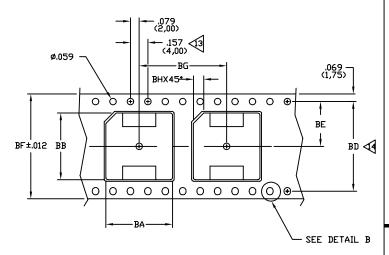

3 |

CARRIER TAPE
DETAIL A



1 2

1 | 2

mat	'l. c	ode						s uni					MER	Electronics								
ltr	ecr	n no	dr	date			۸.	Χ±	10			COP			F	CI			www.f	cicon	nect.co	m
D					linear		.XX	Χ±	.008	}	proj	ection	1	title							т	
			l								IА	`	_		SURFACE MOUNT							
					angle) 1	7		PLCC SOCKET						<u>ΓS</u>	
					dr	C.GINGRICH 6/8/01						INCH		produ				PLC	С		code	
					engr	r D.WHITING 6/				/01	-		_	size	dwg	no						-
					chr	D.	WHITI	NG	6/8	/01	scale			A4		5	ar	00	1		shee	et .
					appd	D.	D.WHITING			/01		NTS	<u> </u>	74			3				4 0	ıf
shee	et	revis	ion																			
inde	×	shee	t																			
		ACA	ת								3				Ĺ	cage		526	3			4 _

ΑD

Х


> RUBBER PLUG

3

ΑB

SECTION X-X

FIG. 1, TUBE FOR SMT PLCC SOCKET W/O PEGS



SECTION X-X FIG. 2, TUBE FOR SMT PLCC SOCKET W/ PEGS

NOTES:

FOR SOCKETS' DIMENSIONS PLEASE SEE SHEET 1.

- 7. THE SHIPPING TUBE FOR SOCKETS WITHOUT PEGS IS SHOWN IN FIG. 1 AND THE SHIPPING TUBE FOR SOCKETS WITH PEGS IS SHOWN IN FIG. 2.
- 8. TUBE MATERIAL: PVC
- TWO REMOVABLE STOPPERS (ONE IN EACH END) CONTAIN THE SOCKETS WITHIN THE TUBE ENDS.
- 10. DIMENSIONS IN PARENTHESIS ARE METRIC.

507 4	DRIGINAL 6		TUB	F DIME	ZNDIZN	
FCI 🌜	BERG <6 PART NUMBER	AA ±.012 (±0,30)	AB ±.012 (±0,30)	AC ±.005 (±0,12)	AD ±.08 (±2,0)	QTY/TUB
PLCC-20P-T-SMT PLCC-20P-T-SMT-P	69802-120 69802-020	0.708 (17,98)	0.332 (8,44)	0.020 (0,50)	24.09 (612.0)	37
PLCC-28P-T-SMT PLCC-28P-T-SMT-P	69802-128 69802-028	0.812 (20,6 <i>2</i>)	0.336 (8,54)	0.022 (0,55)	24.09 (612.0)	32
PLCC-32P-T-SMT PLCC-32P-T-SMT-P	69802-132 69802-032	0.812 (20,62)	0.336 (8,54)	0.022	24.09 (612.0)	28
PLCC-44P-T-SMT PLCC-44P-T-SMT-P	69802-144 69802-044	1.016 (25,8 0	0.340 (8,64)	0.024	24.09 (612.0)	25
PLCC-52P-T-SMT PLCC-52P-T-SMT-P	69802-152 69802-052	1.116 (28,34)	0.340 (8,64)	0.024	24.09 (612.0)	23
PLCC-68P-T-SMT PLCC-68P-T-SMT-P	69802-168 69802-068	1.320 (33,52)	0.344 (8,74)	0.026 (0,65)	24.09 (612.0)	18
PLCC-84P-T-SMT PLCC-84P-T-SMT-P	69802-184 69802-084	1.520 (38,60	0.344 (8,74)	0.026 (0,65)	24.09 (612.0)	16

_																								
mat	'l. co	ode						s uni	less cified		ı	STON		~~~										
ltr	ecn	no	dr	date			(.	⟨ X±	.10			COPY		4	F	CI	fcicon	iconnect.com						
۵					linea	· 🗀	.x	XX±.	800.		proj	ection)	title	title									
											4	2 .	$\overline{}$	SUFACE MOUNT										
					angle	ngles 0° ±2°							7	PLCC SOCKETS										
					dr	r C.GINGRICH 6/8/01										mily		PLC	С		code	Ü		
					engr	D.	WHITI	NG	6/8	/01	-		<u> </u>	size	dwg	no] -	-		
					chr	D.	D.WHITING			6/8/01		scale		امدا		\subseteq	α	9001				et		
				appd	D.	D.WHITING		6/8	3/01		NTS	;	A4		\mathcal{L}	9	JU	-		5 (of			
she	et	revis	ion																					
inde	ex	shee	t																					
											3				cage code 22526							4		

ACAD

STATUS:Released Printed: Jan 21, 2006

1 | 2

TOP VIEW OF TUBE

NOTE: 'PLCC-68P-T-SMT-P' SOCKET SHOWN.

1 | 2

PDM: Rev:D

PLCC-84P-T-SMT-TR

i	₽	
	from	
	authority	
	written	
	without	FCI.
and a man an annual or contract the man and a second or man	form whatever is not permitted without written authority from t	Property of FCI. Copyright FCI.
	er Is not	. FC!
,)	, whateve	perty of
	for	P

	1 2	
FCI PART NUMBER	ORIGINAL BERG	ORIGINAL BURNDY
WITHOUT PEGS	PART NUMBER	PART NUMBER
	WITHOUT PEGS	WITHOUT PEGS
PLCC-20P-T-SMT	69802-120	QSIE20P-510T
PLCC-28P-T-SMT	69802-128	QSIE28P-510T
PLCC-32P-T-SMT	69802-132	QSIE32P-510T
PLCC-44P-T-SMT	69802-144	QSIE44P-510T
PLCC-52P-T-SMT	69802-152	QSIE52P-510T
PLCC-68P-T-SMT	69802-168	QSIE68P-510T
PLCC-84P-T-SMT	69802-184	QSIE84P-510T
FCI PART NUMBER WITH PEGS	ORIGINAL BERG PART NUMBER WITH PEGS	ORIGINAL BURNDY PART NUMBER WITH PEGS
PLCC-20P-T-SMT-P	69802-020	QSIE20P-512T
PLCC-28P-T-SMT-P	69802-028	QSIE28P-512T
PLCC-32P-T-SMT-P	69802-032	QSIE32P-512T
PLCC-44P-T-SMT-P	69802-044	QSIE44P-512T
PLCC-52P-T-SMT-P	69802-052	QSIE52P-512T
PLCC-68P-T-SMT-P	69802-068	QSIE68P-512T
PLCC-84P-T-SMT-P	69802-084	QSIE84P-512T
FCI PART NUMBER WITH TAPE & REEL	ORIGINAL BERG PART NUMBER WITH TAPE & REEL	ORIGINAL BURNDY PART NUMBER WITH TAPE & REEL
PLCC-20P-T-SMT-TR	69802-420	QSIE20P-510R
PLCC-28P-T-SMT-TR	69802-428	QSIE28P-510R
PLCC-32P-T-SMT-TR	69802-432	QSIE32P-510R
PLCC-44P-T-SMT-TR	69802-444	QSIE44P-510R
PLCC-52P-T-SMT-TR	69802-452	QSIE52P-510R
PLCC-68P-T-SMT-TR	69802-468	QSIE68P-510R
1	l	

69802-484

1 2

QSIE84P-510R

mat	ťl. co	de							s un	less cified			STO		Electronics								
ltr	ecn	no	dr	date	;			.xx	±.01	/.x.3	3		COP		4	F	CI			www.f	ciconr	ect.co	om
D						linea	r [.x	±XX.\800.±XXX.				proje	ection	1	title	(_ ^ <		_			
												1 4	7 7	_1	SURFACE MOUN PLCC SOCKET								
						angle	s		0° ±	:2°		₩ €						<u>CC</u>	<u>S(</u>	<u>)Ck</u>	<u>EL</u>		
						dr	dr C.GINGRICH 6/8/01					lino	CH/I	ММ	produ	ıct fa	mily		PLC(<u> </u>		cod	е
						engr	D.	WHITI	NG	6/8	/01	_		_	size	dwg	no						_
						chr	D.	IITIHW.	NG	6/8	/01	scale			A4		5	90	\cap	1		she	et
						appd	D.	WHITI	NG	6/8	/01		NTS	<u> </u>	A4		\mathcal{L}	50	70	l .		6	of
she	et	revis	ion																				
inde	index sheet											L											
												3				'		code		_			4
	ACAD												L		22	<u>520</u>	>						

3 |

PDM: Rev:D

STATUS: Released

Printed: Jan 21, 2006