

SPECIFICATIONS

Electrical

Rating: 400mA max. 20V DC max.
Contact Resistance: 250m max.
Insulation Resistance: 100M min.
Dielectric Withstanding Voltage: 1000V RMS for 1 Minute
Bounce: on Bounce 11ms max. off Bounce 11ms max.

Mechanical


Operating Force & Durability: 226gf max 10000 Cycles
Travel: 10.16±0.20mm

Physical


Operating Temperatures: -20 to +85

Push Switch

1BP002 Series
Cable Type
Write "A" On Housing



DRAWING

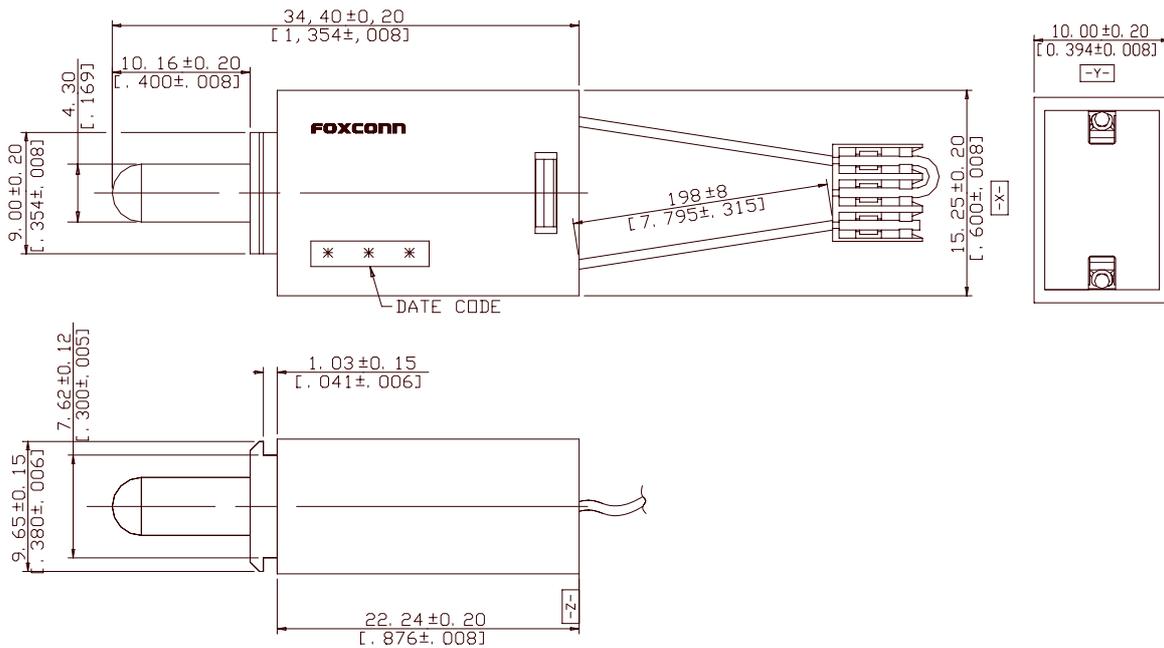

ORDERING INFORMATION

PRODUCT NO.: 1BP002-11010-002

