

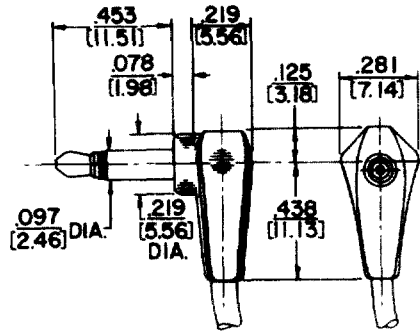


MOLDED CABLE ASSEMBLIES With Micro Plug® Subminiature Phone Plugs



RA850
Termination Code: 61

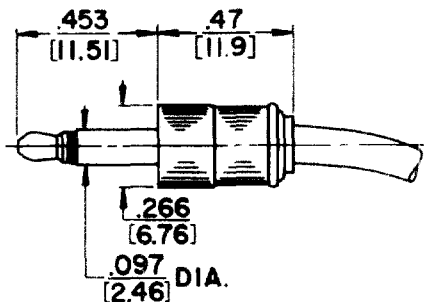

ST850
Termination Code: 60

DESIGN FEATURES

- Thermoplastic insulation between tip and sleeve circuits.
- "Pear-shaped" one-piece tip rod.
- Cable clamp connects cable shield (or second conductor) to plug sleeve.

SPECIFICATIONS

PLUG

Tip and Sleeve: Plated copper alloy.
Insulation: W-1032-1. Molded thermoplastic.
Sleeve Terminal: Tinned copper alloy.
Molded Handle: Plastic.
Standard Colors: Gray, white, black, brown.
Other colors available on special order.

CABLE

Standard Shielded Cable—Type W-1032-1.

NOTE: See Standard Cable Chart on page 251 for details. Order by part number from guide on page 250.

Special Cable: We will build assemblies on cable furnished by you, 109 inch (2.77 mm) diameter maximum, or on cable we purchase to your specifications. Jacket must have temperature rating of 60° C minimum.

RA850: Right-angle Micro-Plug® plug with plastic handle. Short body extension. Molded to cables up to .109 inch (2.77 mm) outside diameter.

ST850: Straight Micro-Plug® plug, small plastic handle, only .47 inch (11.9 mm) long.

NOTE: Micro-Plug® molded cable assemblies mate with Switchcraft Micro-Jax® TR-2A.

With Micro-Extension Jax® Subminiature Extension Jacks

SPECIFICATIONS

Housing: Plated copper alloy.
Handle: Thermoplastic.
Center Contact: Plated copper alloy.
Insulation: Hard rubber.

CABLE


Standard Shielded—Type W-1032-1.

NOTE: See Standard Cable Chart on page 251 for details. Order by part number from guide on page 250.

Special Cable: We will build assemblies on cable furnished by you, 14 or .16 inch (3.56 or 4.06 mm) outside diameter, or on cable we purchase to your specifications. Jacket must have a temperature rating of 60° C minimum.

◇**ST123:** Subminiature phone jack has outside diameter of .281 inch (7.14 mm), with a .099 inch (2.51 mm) inside diameter bushing. Mates with Switchcraft Micro-Plug® phone plug. Cable clamp provides positive strain relief.

† Special order only. Contact Switchcraft for details

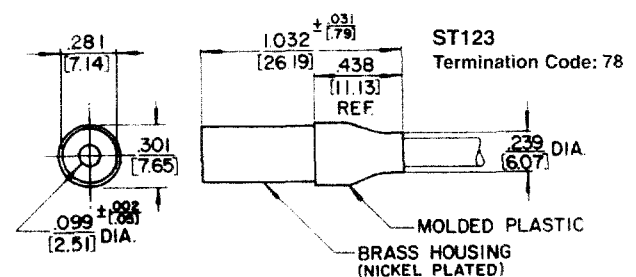

DIMENSIONS ARE FOR REFERENCE ONLY $\frac{\text{Inch}}{(\text{mm})}$

NOTE: Contact your Switchcraft Representative for price and delivery.