


Division	Part No.	V _{RM} (kV)	I _F (AV) (mA)	V _F (max) (V)	trr (μS) I _F =I _{RP}		Fig. No.
					Ta=25°C	Ta=100°C	
General purpose	SHV-02	2	2	16	0.18	-	1
	SHV-03S	3	2	16	0.18	-	
	SHV-03	3	2	16	0.18	-	2
For general FBT	SHV-10	10	2*	40	0.18	-	3
	SHV-12	12	2*	45	0.18	-	
	SHV-14	14	2*	55	0.18	-	
	SHV-16	16	2*	60	0.18	-	4
	SHV-20	20	2*	75	0.18	-	
	SHV-24	24	2*	75	0.18	-	
For high-frequency multi-layer FBT	SHV-06EN	6	2*	26	0.15	0.2	5
	SHV-08EN	8	2*	30	0.15	0.2	
	SHV-10EN	10	2*	38	0.15	0.2	6
	SHV-12EN	12	2*	45	0.15	0.2	
For ultra-high-frequency multi-layer FBT	SHV-08DN	8	2*	30	0.15	0.2	5
	SHV-10DN	10	2*	38	0.15	0.2	6
	SHV-12DN	12	2*	45	0.15	0.2	
For general type microwave oven	HVR-1X-40B	9	350	9	-	-	7
For inverter-type microwave oven	UX-F5B	8	350	14	0.15	-	
For automotive ignition coil	SHV-05JS	2.5	30	5	V _Z =2.6~5.0kV		2
	SHV-06JN	3	30	6	V _Z =3.2~6.0kV		5
	SHV-08J	4	30	8	V _Z =4.5~8.0kV		8
	SHV-30J	15	30	30	V _Z =16.0~30.0kV		6


*FBT High voltage Rectifier Capacitive Load, T_c≤100°C

External Dimensions


• No. 1

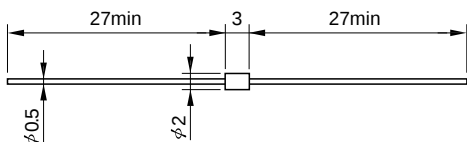


• No. 2

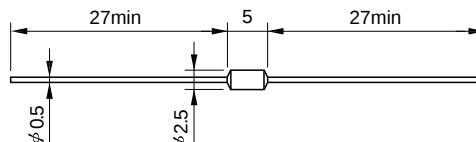


• No. 3

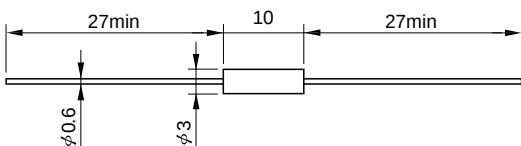


• No. 4

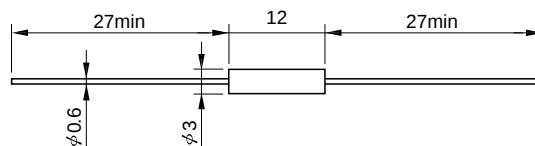


• No. 5

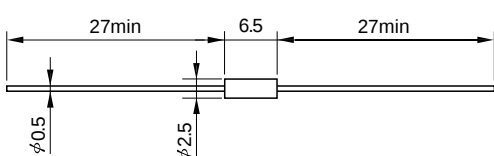


• No. 6

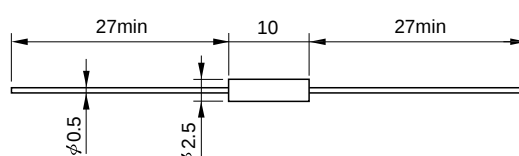

• No. 7

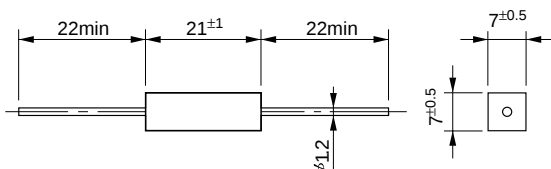

• No. 8

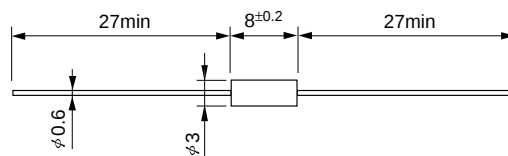

(unit: mm)