


MTA206PA Product Details

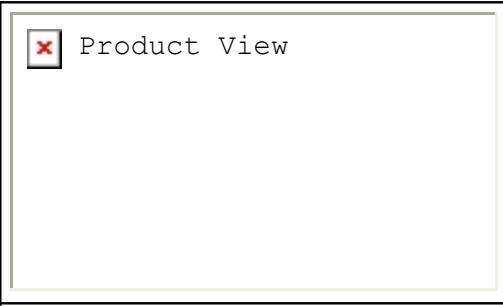

Toggle Switches

[Not EU RoHS or ELV Compliant \(Find RoHS Compliant Alternates\)](#)

Product Highlights:

- MTA Series
- Single Pole - Three Throw Configuration (Pole-Throw)
- Current Rating = 6 Amps.
- Mount Style = Panel
- Termination Type = Vertical, Wire Lugs

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

MTA206PA

(2-1437558-3)

TE Internal Number: 2-1437558-3



Superseded

[Search for Replacement Parts](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • ALCOSWITCH PRODUCTS (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Additional Product Images:</p> <ul style="list-style-type: none"> • Dimensional Drawing <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	---

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Configuration (Pole-Throw) = Single Pole - Three Throw • Termination Type = Vertical, Wire Lugs • Comment = UL available when ordering - consult factory. <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Current Rating (Amps.) = 6 <p>Termination Related Features:</p> <ul style="list-style-type: none"> • Seal Type = Terminal Seal (Insert Molded) <p>Body Related Features:</p> <ul style="list-style-type: none"> • Series = MTA • Mount Style = Panel • Flammability Rating = UL 94V-0 <p>Contact Related Features:</p> <ul style="list-style-type: none"> • Contact Plating = Gold Flash over Silver 	<p>Housing Related Features:</p> <ul style="list-style-type: none"> • Toggle Style = Baton Long • Toggle Length (mm [in]) = 10.40 [0.410] • Process Sealed = No • Bushing Style = Threaded • Bushing Type = 1/4-40 <p>Configuration Related Features:</p> <ul style="list-style-type: none"> • Operating Function = On On On <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = Not ELV/RoHS compliant • Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C <p>Other:</p> <ul style="list-style-type: none"> • Brand = Alcoswitch
---	--