

# 60VA & 75VA Wire Lead Transformers

4000 Series - Class II U.L. 1585

Non-Inherently Energy Limited (Secondary fusing required)

- **Type "K" Foot Mount** - features steel bracket welded to the bottom of the laminations for easy mounting.
- **Type "G" Panel Mount** - features .218" diameter holes in each corner to allow direct mounting to a panel.
- For Agency Approval, 60VA & 75VA transformers must have one of the following overcurrent protectors in series with the secondary winding:
  - Internally Fused
  - Integral Circuit Breaker
  - Customer Supplied - must be approved by factory. Part number series becomes "4001"

PART NUMBER	VA RATING	PRIMARY VOLTS	SEC. VOLTS	FREQUENCY HERTZ	"A" DIM.	"B" DIM.	"C" DIM.	"D" DIM.	"E" DIM.	BOX QUANTITY	APPROX. WEIGHT
4000-01L15K*	60	120	24	50/60	3.562"	3.00"	2.50"	2.475" <sup>(1)</sup>	1.00"	10	2.20 lbs 1.00 kg
-02L15K*		240	24								
-03L15K*		277	24								
-04L15K*		480	24								
-05L15K*		120/208/240	24								
-09L15K*		208/240	24								
4000-01J15K999**	75	120	24	50/60	3.562"	3.00"	2.50"	2.475" <sup>(1)</sup>	1.00"	10	2.50 lbs 1.13 kgs
-01J15K*		120	24								
-02J15K*		240	24								
-03J15K999**		277	24								
-03J15K*		277	24								
-04J15K*		480	24								
-05J15K*		120/208/240	24								
-09J15K999**		208/240	24								
-09J15K*		208/240	24								
-13J15K*		208/240/480	24								
-51J15K*		380/415	24								
-78J15K999**		575	24								
-78J15K*		575	24								2.70 lbs
4000-08J41K999**		120/208/240/480	24		3.562"	3.00"	2.50"	3.45"	1.125"		1.22 kgs

To specify Panel Mount, change "K" in the part number to "G".  
 \*A three digit customer ID suffix will be assigned by the factory.  
 Consult factory for availability of other voltage combinations.  
**All "999" 75VA models come standard with an integral circuit breaker.**  
**\*\* Part numbers with the "999" suffix are in stock and available for immediate shipment.**


AGENCY APPROVALS: U.L./C.U.L. File E87824  
 Guide No. XOKV2  
 C.S.A. File LR56266  
 Insulation System = 130°C Class B

THE FOLLOWING FEATURES ARE STANDARD ON ALL LEADED MODELS									
PRIMARY LEAD COLOR CODE								SECONDARY	
<b>VOLTAGE</b>	COM	120	208	240	277	480	575	24	VAC
<b>COLOR</b>	BLK	WHT	RED	ORG	BRN	BLK/RED	GRY	BLU	YEL
<b>LENGTH</b>	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"	9 1/2"
<b>STRIP LENGTH</b>	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"


All leads are 18 AWG stranded - 2/64" insulation thickness.  
**\*\* Part numbers with "999" suffix have 12" total lead length, with 1/2" strip.**

# 60VA & 75VA Wire Lead Transformers


4000 Series - Class II U.L. 1585

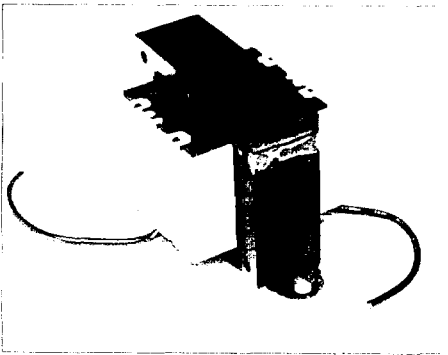

4000-01L15K\*



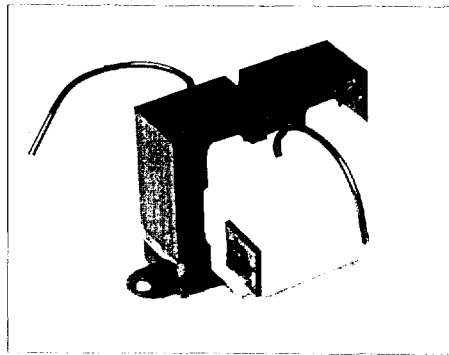


4000-01J15K\*



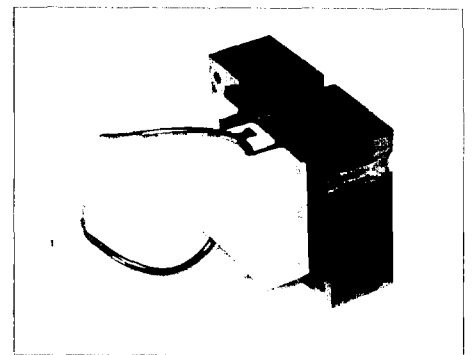


4000-01J15G\*




## Type "K" Foot Mount Fused Versions

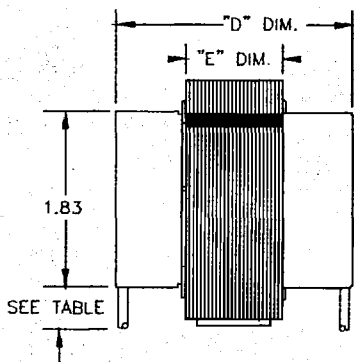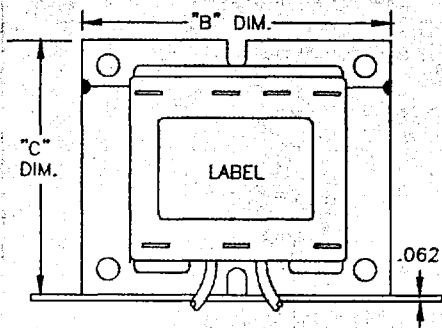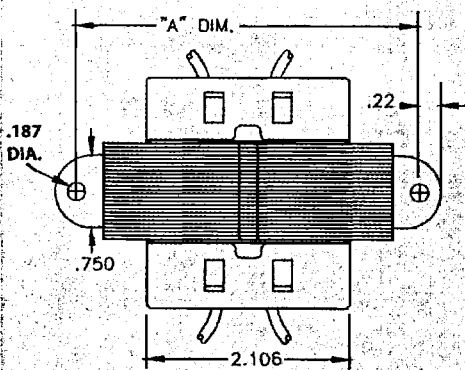

## Type "K" Foot Mount Circuit Breaker Versions

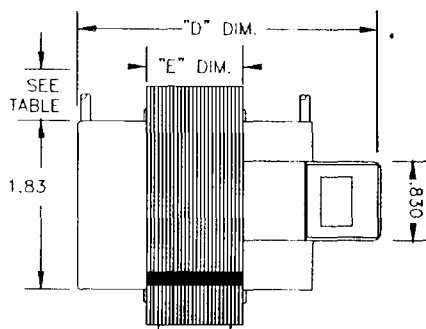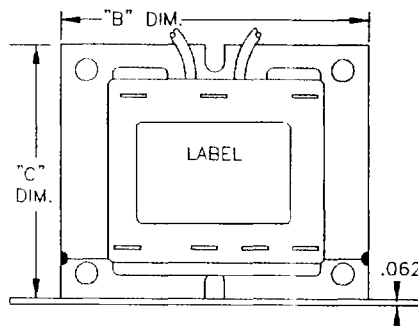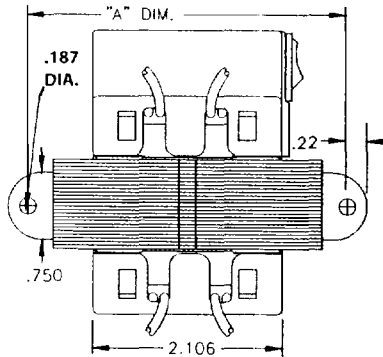

## Type "G" Panel Mount

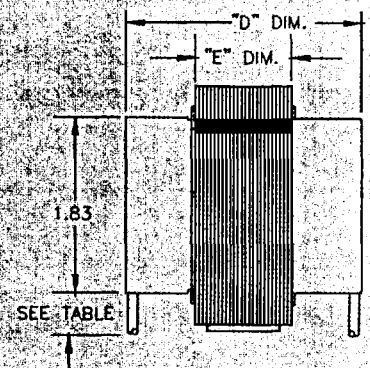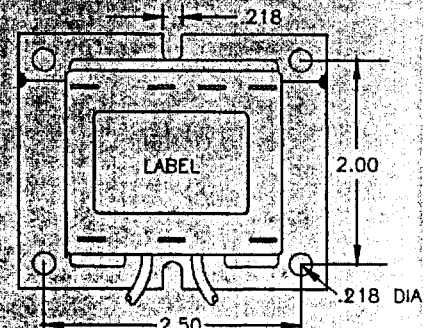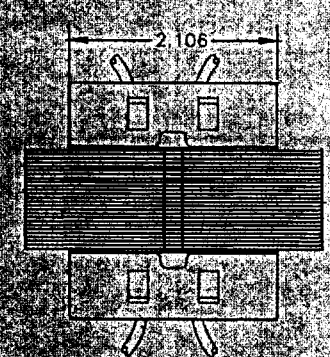

Dimensions shown are in inches and apply to transformers listed on page 28.



**Products Unlimited Corp.**  
Sales & Technical Support  
815-626-0300