

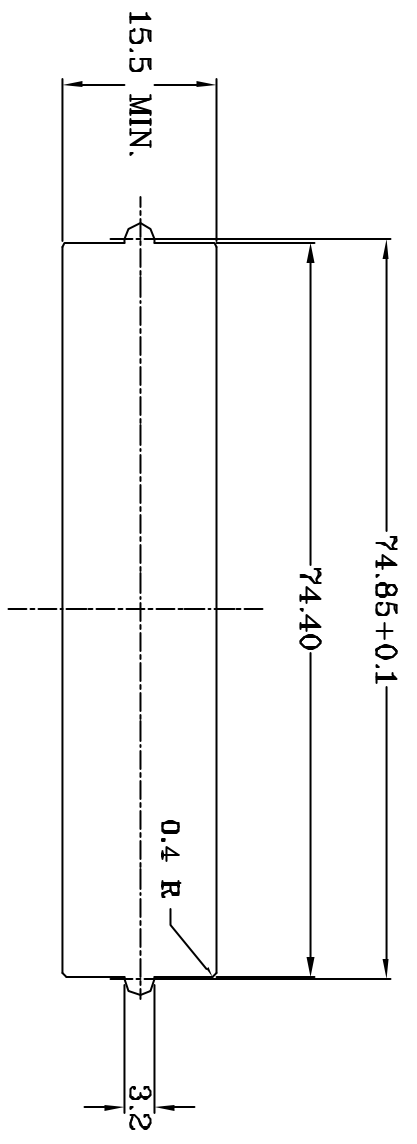
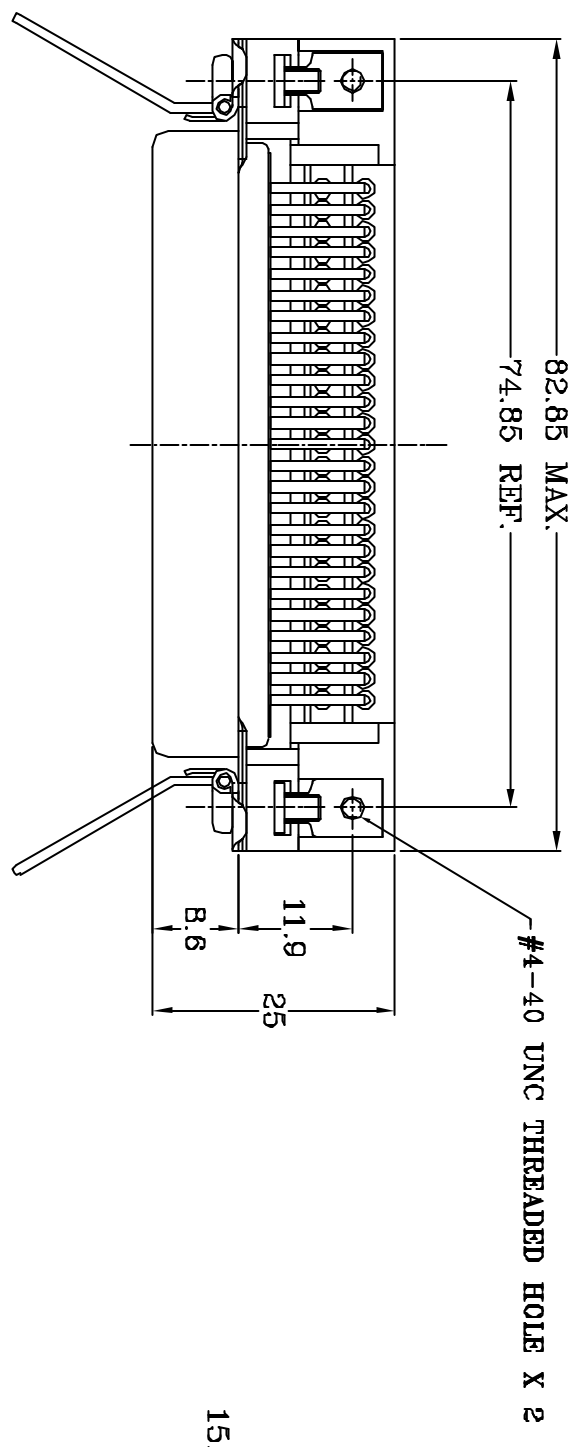


This document is the property of Amphenol Corporation and is delivered by Amphenol Corporation under license to the recipient. It is to be used only for the specific application and for the specific quantity of Amphenol Corporation without the prior consent of Amphenol Corporation. It is to be discarded or destroyed if not used for the intended application.

REVISIONS		DATE	APPROVED
SYM	ECN	DESCRIPTION	
B	HK#	FOR REFERENCE ONLY	12/25/03 Y.M.LEE

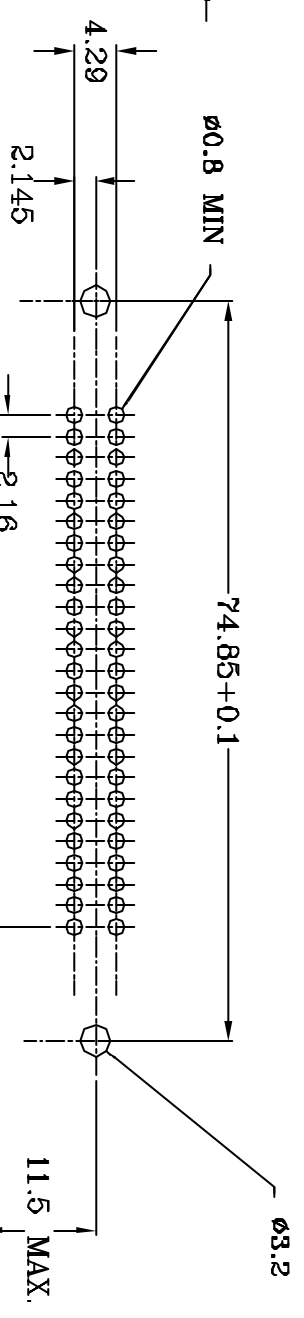

PANEL CUT OUT-BOTTOM MOUNTING

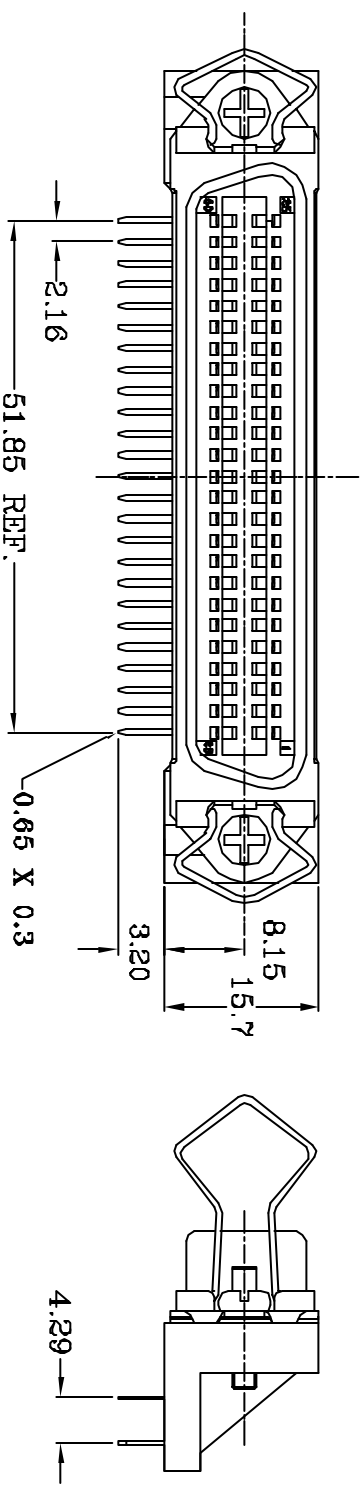

P.C.B. MOUNTING DIMENSIONS

**Materials**  
 Contact.....Copper Alloy  
 Contact Plating..... 15u" Gold in mating, Tin/Lead plated on terminal.  
 Insert Block.....Polyester resin(UL94V-0), blue  
 Locator.....Polyester resin(UL94V-0), blue  
 Spring Latch.....Stainless steel  
 Front Shell.....Steel/Nickel Plating

**Specification**  
 Voltage Rating.....500V AC (RMS)  
 Current Rating.....3A/contact  
 Dielectric Withstanding Voltage.....1200V AC (RMS) at see level  
 Insulation resistance.....1000MOHM MIN. at 500V DC  
 Contact Resistance.....35MOHM MAX. at 1A DC  
 Operation Temperature Range.....-55°C ~+105°C

**NOTES:**  
 1. Material should be fulfilled Amphenol spec.# SSN001

**CUSTOMER INFORMATION DRAWING**

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES		DRAWN		12/25/03	
US		Breze		12/25/03	
METRIC		CHECKED		12/25/03	
X +/- .250		FILE NAME		TITLE	
XX +/- .100		DRAWING STYLE		57LE RIGHT ANGLE PCB, 50 WAY	
XXX +/- .025		C57LE405007300.DWG		RECEPTACLE, #4-40 GROUND TAB	
FRACTIONS +/-		ANGLE OF PROJECTION		SIZE	
ANGLES +/-		REMOVE SHARP EDGES		DRAWING NO.	
FOR MATERIALS AND FINISHES		DIMENSIONS		A3	
SEE NOTES		US - INCHES		SCALE	
REMOVE SHARP EDGES		METRIC - MM		NONE	
TITLE		SCALE		SHEET 1 OF 1	
Amphenol		NONE		REV. B	