




0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

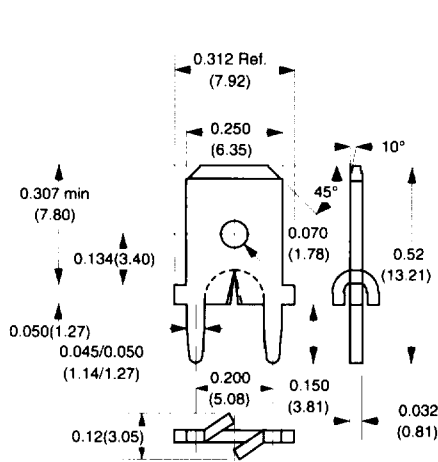

A

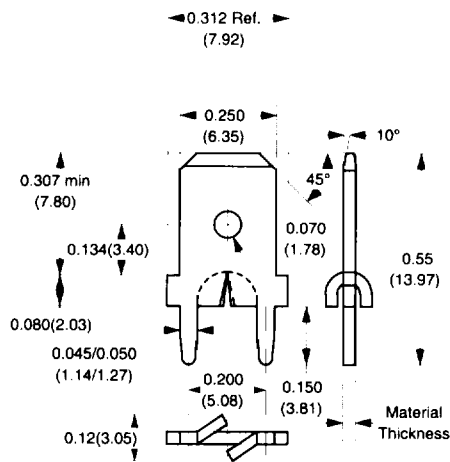

B

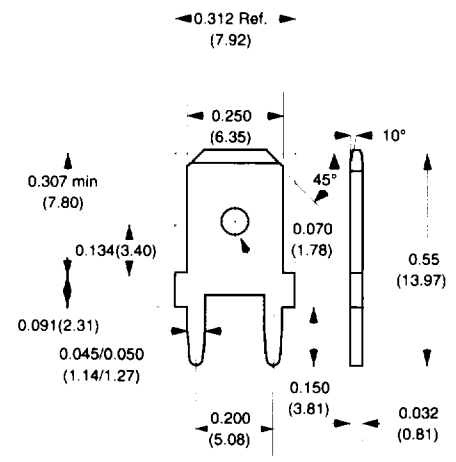


C


Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
A	1061	6061-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC
B	1021-028	6021-028-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.028" (0.71mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC
B	1021	6021-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC
C	836/836-Tape	6836-6	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A/Tape: Model 8000 Reeled: Model 7000,9500,9500CNC

†Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.


0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

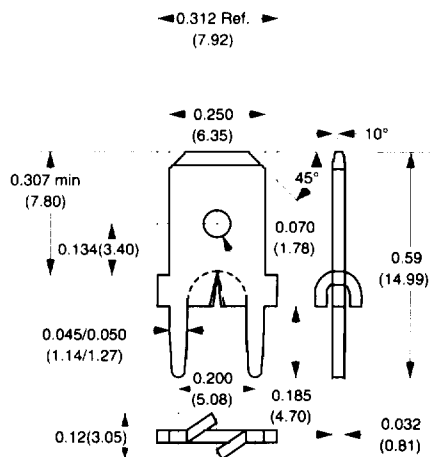

D

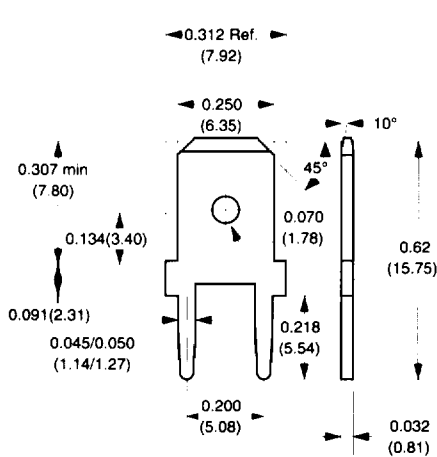

E

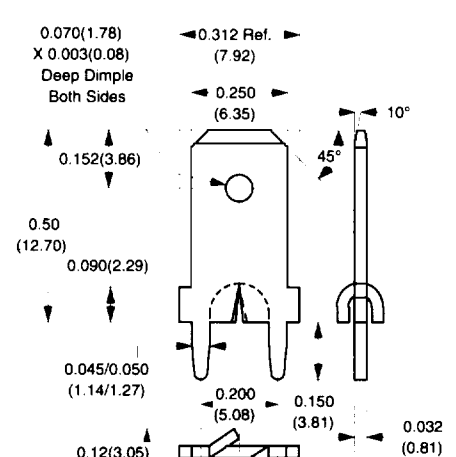


F


Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
D	1060	6060-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC
E	906/906-Tape	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A/Tape: Model 8000 Tape: Model 8000
F	1045	6045-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC

†Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.


0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

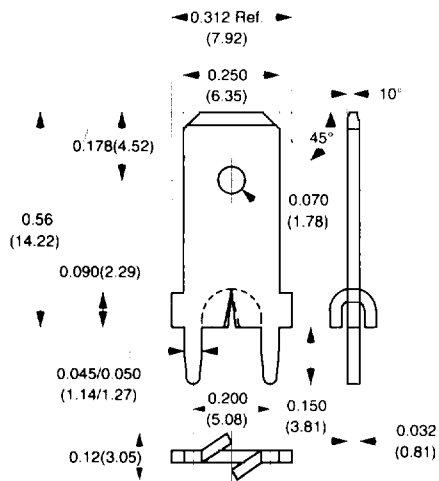

G

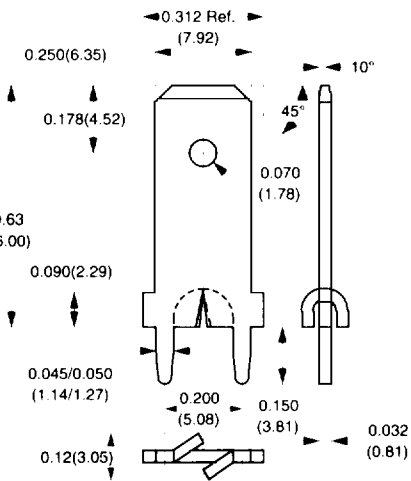

H

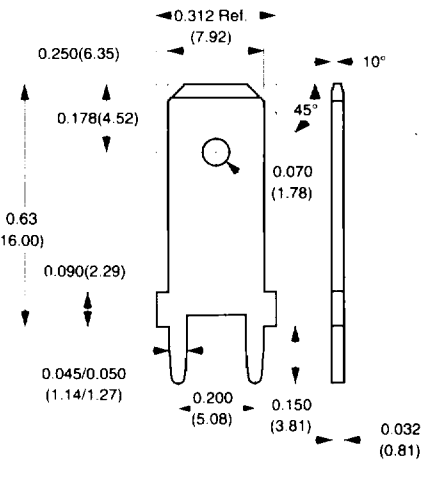


I


Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
G	1041	6041-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC
H	1057	6057-6	Stable-Lok™ Splay Outward or Inward	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 7000,9500,9500CNC
I	972	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A

†Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

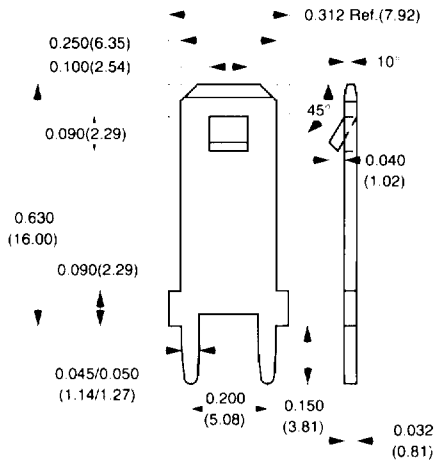

J

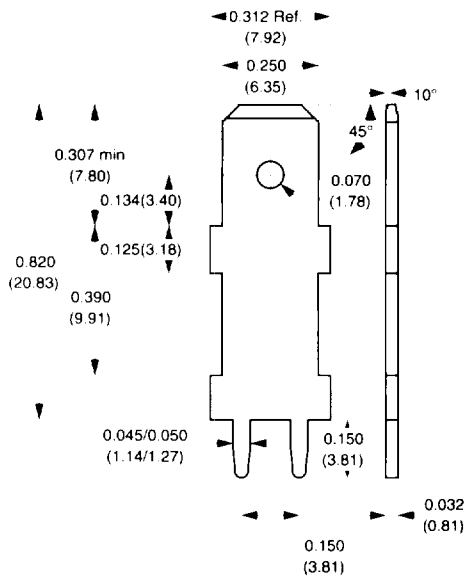


K


Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
J	972-TAB	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A
K	953-MOD	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A

†Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

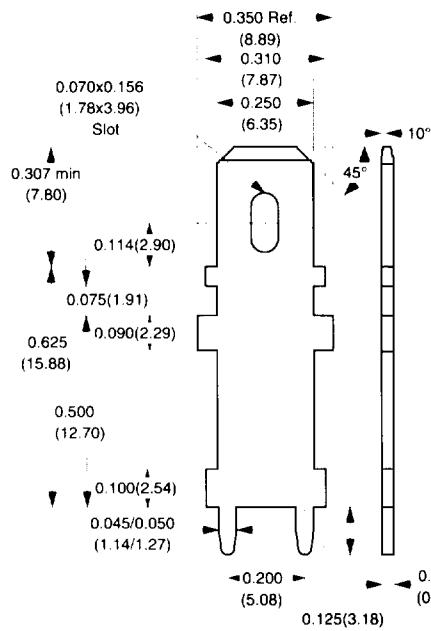

L

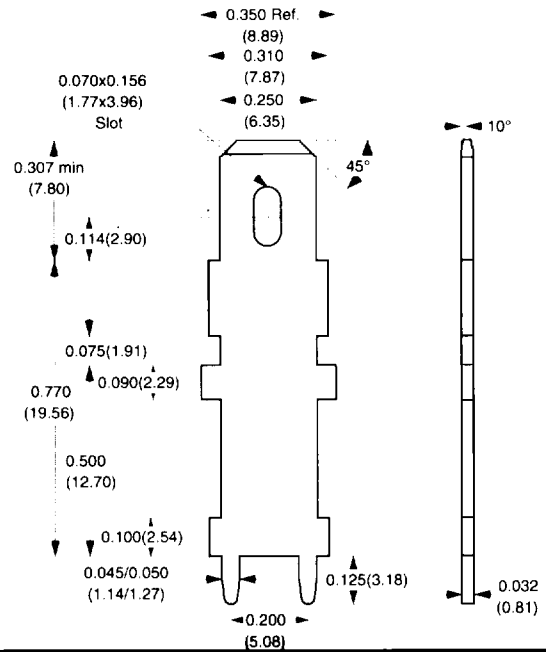


M

Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
L	1113	6113-6	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 9500,9500CNC
M	1112	6112-6	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A Reeled: Model 9500,9500CNC

1Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

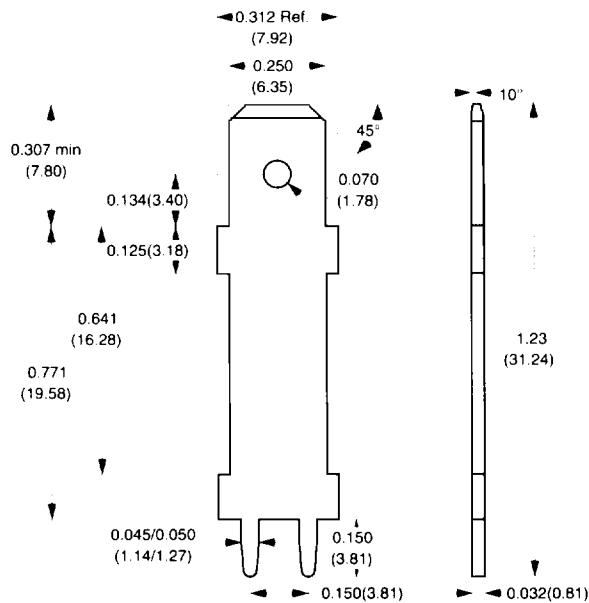


N

Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
N	953	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT81-A

1Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

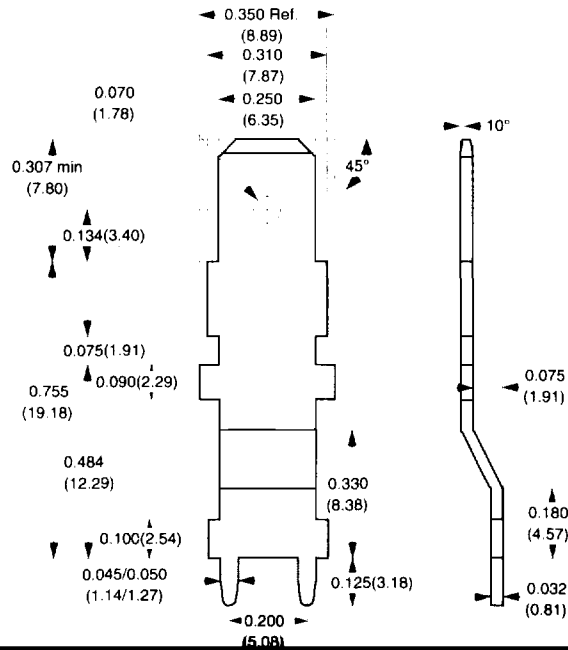


O

Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
O	1131	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: n/a

†Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

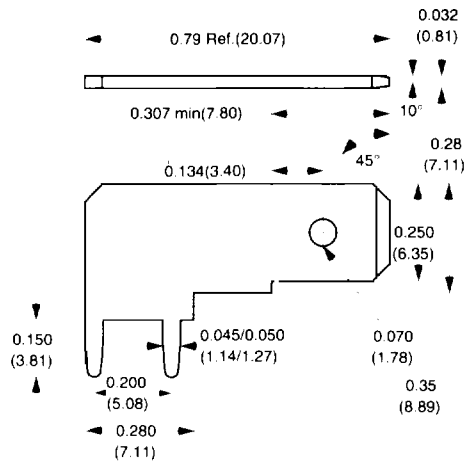


P

Detail	Loose/Tape Part Number	Reeled Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
P	901	n/a	Outward or Inward Splay	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT92-250

†Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

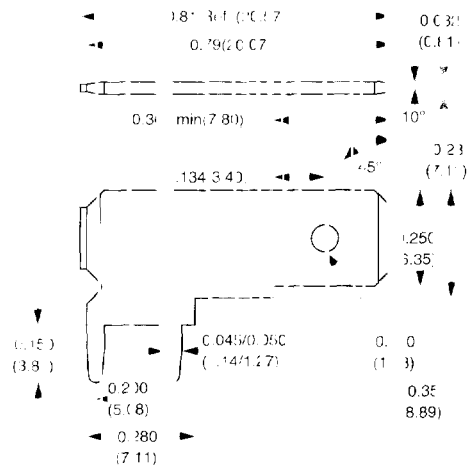


Q

Detail Number	Reel Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
	3901-6	Outward or Inward Solder	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Reeled: Model 9500, 9500CNC

Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.

0.250" (6.35mm) PCB Mountable Quick Disconnect Terminals

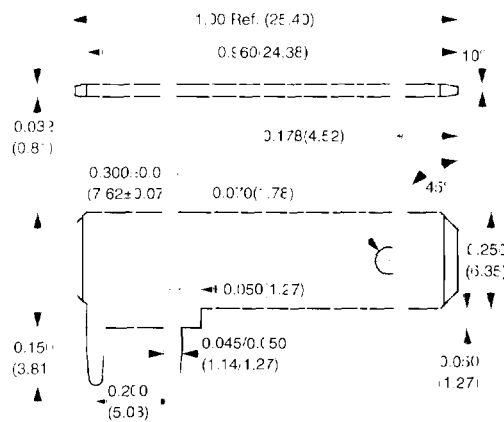

R

Detail Number	Loose Tape Part Number	Reel Part Number	Mounting Type	Quick Disconnect Size	Material Thickness	Mounting Hole Diameter	Applicator System
R	6080-6	6080-6	Outward or Inward Solder	0.250" (6.35mm)	0.032" (0.81mm)	0.052" (1.32mm)	Loose: ZPT92-1080 Reeled: Model 9500, 9500CNC

Non-Plated Through Hole w/±0.004" Tolerance. Please Consult Factory For Information Regarding Plated Through Holes.