
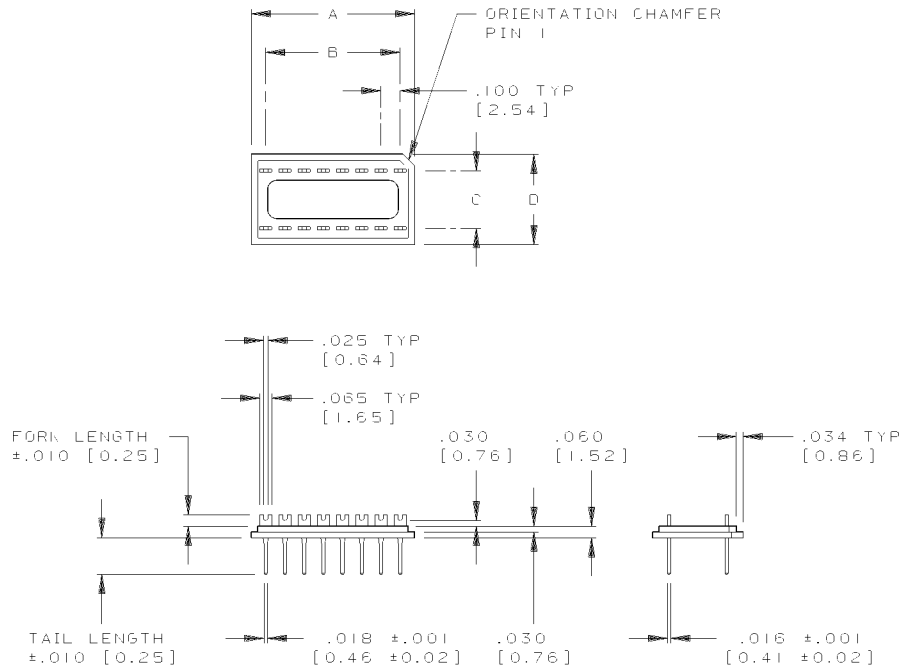


CA DIP Plug

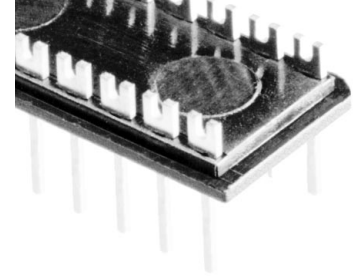

FEATURES

Fork type contacts
Available in four standard fork lengths with two tail lengths.
Consult factory for available types

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material:
Glass filled nylon, black, UL94V-0
Contact Material: Brass, CDA 260
Contact Plating:
Standard
10 μ N gold
Optional
150 μ N 90/10 tin/lead
Consult factory for availability

ELECTRICAL

Current Rating: 1 AMP
Voltage Rating: 300 Vrms
Dielectric Withstanding
Voltage: 500 Vrms MIN
Insulation Resistance:
> 5000 Megohms

MATING CA PRODUCT

The majority of dip sockets shown in this catalog

NOTE

If the contact configuration you need is not listed, please call the factory to determine availability

No. of Positions	Dimensions				Tail Length	Part Numbers (fork length) ".060"
	A	B	C	D		
08	.450 [11.43]	.300 [7.62]	.300 [7.62]	.470 [11.94]	.150 [3.81] .190 [4.83]	CA-08P-04 CA-08P-02
14	.750 [19.05]	.600 [15.24]	.300 [7.62]	.470 [11.94]	.150 [3.81] .190 [4.83]	CA-14P-04 CA-14P-02
16	.850 [21.59]	.700 [17.78]	.300 [7.62]	.470 [11.94]	.150 [3.81] .190 [4.83]	CA-16P-04 CA-16P-02
18	.950 [24.13]	.800 [20.32]	.300 [7.62]	.470 [11.94]	.150 [3.81] .190 [4.83]	CA-18P-04 CA-18P-02
20	1.050 [26.67]	.900 [22.86]	.300 [7.62]	.470 [11.94]	.150 [3.81] .190 [4.83]	CA-20P-04 CA-20P-02
24	1.250 [31.75]	1.100 [27.94]	.600 [15.24]	.795 [20.19]	.150 [3.81] .190 [4.83]	CA-24P-04 CA-24P-02
28	1.450 [36.83]	1.300 [33.02]	.600 [15.24]	.795 [20.19]	.150 [3.81] .190 [4.83]	CA-28P-04 CA-28P-02
40	2.050 [52.07]	1.900 [48.26]	.600 [15.24]	.795 [20.19]	.150 [3.81] .190 [4.83]	CA-40P-04 CA-40P-02

For optional 150 μ N tin plating: replace "P-XX" with "P-TXX", where XX = 02 or 04
Consult Factory For Available Covers

