

SPECIFICATIONS

Mechanical

Plug Mating Force: 3.00kg (6.61Lb) max.
Plug Unmating Force: 0.40~3.00kg (0.88~6.61Lb)
Contact Retention Force: 0.50kg (1.10Lb) min.
Durability: 5000 Cycles

Electrical

Current Rating: 1.00A
Contact Resistance: 50mΩ max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 100MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -25°C to +85°C
Recommended Thickness of PCB: 1.60[.063]


Audio Jack Connector

JA Series

Triple Jack, R/A, T/H Type
Ø 3.5mm [.138"]
13 Pos.



DRAWING

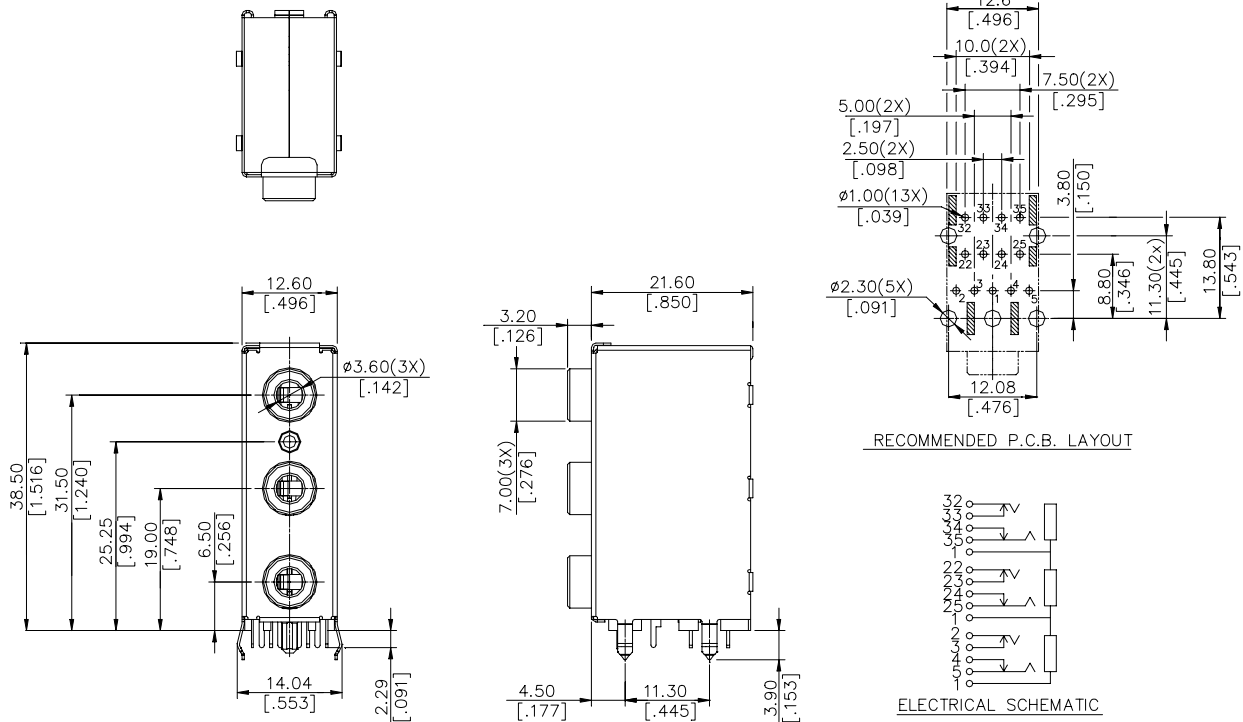

ORDERING INFORMATION

PRODUCT NO.: JA 3 3 3 3 * - G**

Audio Jack Series
 Body Type
 3=Triple Jack
 Sleeve Style
 3=All Plastic Cylindrical
 Plug Type
 3=Three Band
 Plug Diameter
 3=3.50mm

Extension Code

Contact Area Plating
 1=Gold Flash
 F=Gold Flash(Lead Free)
 L=25u" Pd/Ni+Gold Flash
 T=25u" Pd/Ni+Gold Flash(Lead Free)

JA3333*-G01	Brass	Light Blue,Lime,Pink
JA3333*-G31	Steel	Light Blue,Orange,Pink
JA3333*-G39	Steel	Orange,Black,Lime
P/N	SHELL MATERIAL	HOUSING COLOR