


MS3402 CINCH M02

Receptacle, box, front release, crimp contacts (no environmental rear seal or rear accessory threads).




Dimensions (inches)

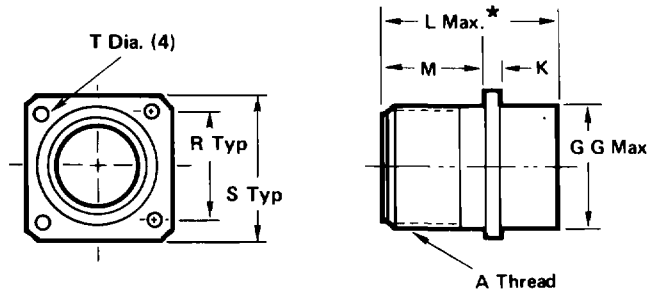

MS3452 CINCH M52

Receptacle, box mounting, rear release, crimp contacts (no environmental rear seal or rear accessory threads).

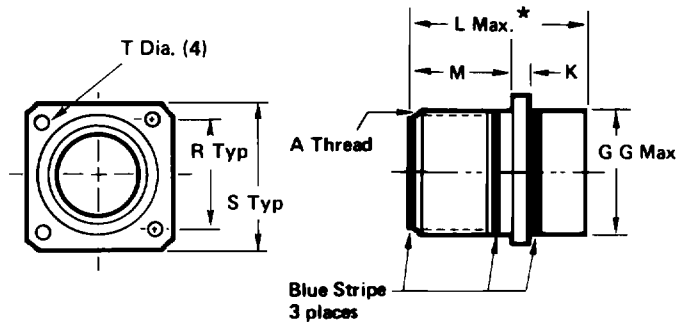

Shell Size	A Thread Class 2A	GG Max.	K ±.015	L* Max.	M +.031 -.000	R ±.005	S ±.031	T +.010 -.005 Class DLW
8S	1/2-28 UNEF	.500	.083	1.550	.562	.594	.875	.120
10S	5/8-24 UNEF	.625	.083	1.550	.562	.719	1.000	.120
10SL	5/8-24 UNEF	.625	.082	1.550	.562	.719	1.000	.120
12S	3/4-20 UNEF	.750	.083	1.550	.562	.812	1.094	.120
12	3/4-20 UNEF	.750	.092	1.550	.750	.812	1.094	.120
14S	7/8-20 UNEF	.875	.083	1.550	.562	.906	1.188	.120
14	7/8-20 UNEF	.875	.083	1.550	.750	.906	1.188	.120
16S	1-20 UNEF	1.000	.083	1.550	.562	.969	1.281	.120
16	1-20 UNEF	1.000	.083	1.550	.750	.969	1.281	.120
18	1-1/8-18 UNEF	1.062	.125	1.550	.750	1.062	1.375	.120
20	1-1/4-10 UNEF	1.187	.125	1.550	.750	1.156	1.500	.120
22	1-3/8-18 UNEF	1.312	.125	1.550	.750	1.250	1.625	.120
24	1-1/2-18 UNEF	1.437	.125	1.550	.812	1.375	1.750	.147
28	1-3/4-18 UNS	1.750	.125	1.550	.812	1.562	2.000	.147
32	2-18 UNS	2.000	.125	1.550	.875	1.750	2.250	.173
36	2-1/4-16 UN	2.250	.125	1.550	.875	1.938	2.500	.173
40	2-1/2-16 UN	2.500	.125	1.550	.875	2.188	2.750	.173
44	2-3/4-16 UN	2.750	.125	1.550	.875	2.375	3.000	.173
48	3-16 UN	3.000	.125	1.550	.875	2.625	3.250	.173

*Add .387 for size 4 & 8 contacts. Add .638 for size 0 contacts
Dimensions subject to change without notice.