

SPECIFICATIONS

Mechanical

Contact Retention Force: 9.8N(1Kgw) min. Contact Mating Force: 39.2N (4Kgw) max. Contact Unmating Force: 6.7N (0.68Kgw) min.

Durability: 10000 Cycles

Electrical

Current Rating: 0.5A max.
Contact Resistance: 20mW max.

Insulation Resistance: 1000MW min. (Initial)
Dielectric Withstanding Voltage: 500 V AC RMS

Physical


Housing: LCP, UL 94V-0 rated in Black Color

Contact: Phosphor Bronze


Operating Temperature: -55 $^{\circ}$ C to +85 $^{\circ}$ C

PCMCIA connector

WH Series, 68 Pos. T/H Horizontal Type & SMT Type 1.27 mm [0.050"] Pitch



DRAWING

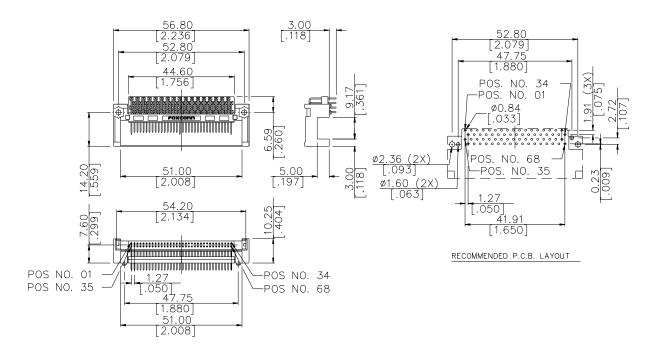

ORDERING INFORMATION

