



Chip Ferrite Bead Arrays - Specifications

Part Number	[Z] @ 100 MHz (ohms)		DC Resistance	Rated Current
	Typical	Minimum	(m ohms) Max	(mA)
WPB-4H3216-300	30	22	100	200
WPB-4M3216-600	60	45	120	200
WPB-4M3216-800	80	60	150	150
WPB-4M3216-121	120	90	200	100
WPB-4M3216-201	200	150	300	100
WPB-4M3216-301	300	225	450	100
WPB-4M3216-601	600	450	500	100
WPB-4M3216-102	1000	750	800	100
WPB-4T3216-121	120	90	200	200
WPB-4T3216-201	200	150	300	150
WPB-4T3216-301	300	225	450	150
WPB-4T3216-601	600	450	500	100
WPB-4T3216-102	1000	750	800	50
WPB-4S3216-500	50	37	200	200
WPB-4S3216-800	80	60	250	200
WPB-4S3216-121	120	90	250	200
WPB-4S3216-201	200	150	300	200
WPB-4S3216-301	300	225	400	200
WPB-4V3216-400	40	30	150	200
WPB-4V3216-600	60	45	200	200
WPB-4V3216-800	80	60	200	200
WPB-4V3216-121	120	90	300	150
WPB-4V3216-201	200	150	400	100
WPB-4V3216-301	300	225	500	100

WPB-4M3216-121

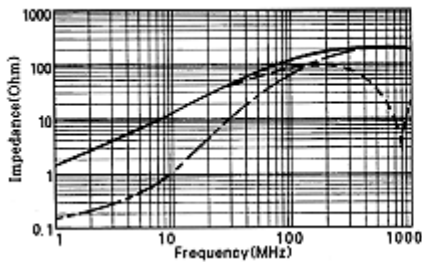

WPB-4M3216-601

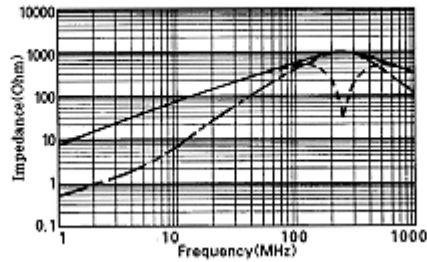

WPB-4M3216-102

