

1.27mm X 1.27mm (0.05" X 0.05") SMD Female Top Entry

Dual Row 10 to 100 Contacts

For Square Post Mating


0172D Series

APPLICATION AND FEATURES

1. Side stackable (on unbroken edges).
2. Variable gold or tin plated.
3. Mates with P.C.Board connectors such as 0081D,0055D & 0083D,0086D series.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: Polyester,UL 94V-0
 ©Standard:L.C.P

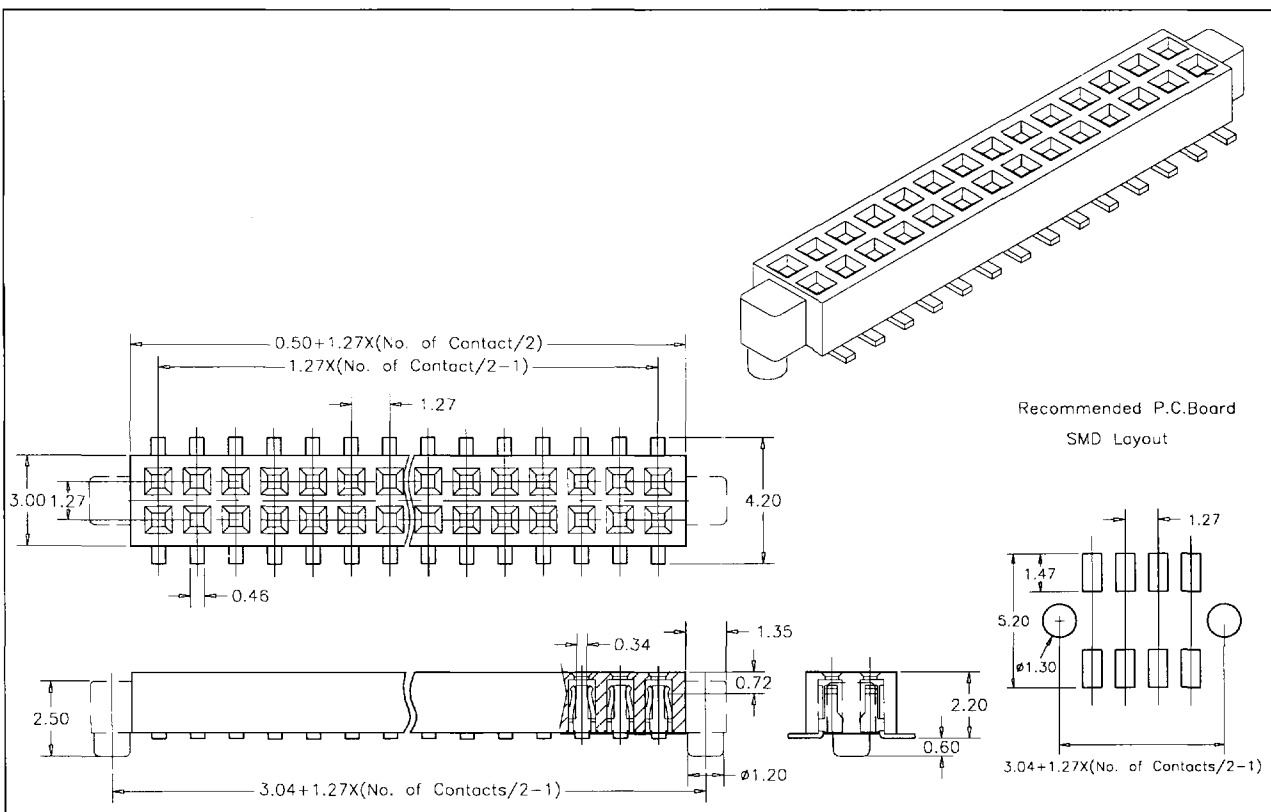

Order Information 0172D Series

Example: 0172D-40-02-1

Series No.

0172D

Number of Contacts

10 to 100 Contacts

Contact Plating

Tin Plated 01

Gold Plated

Flash 02

10 μ" 10

30 μ" 30

Locating Peg

W/O Locating peg 0

W Locating peg 1