

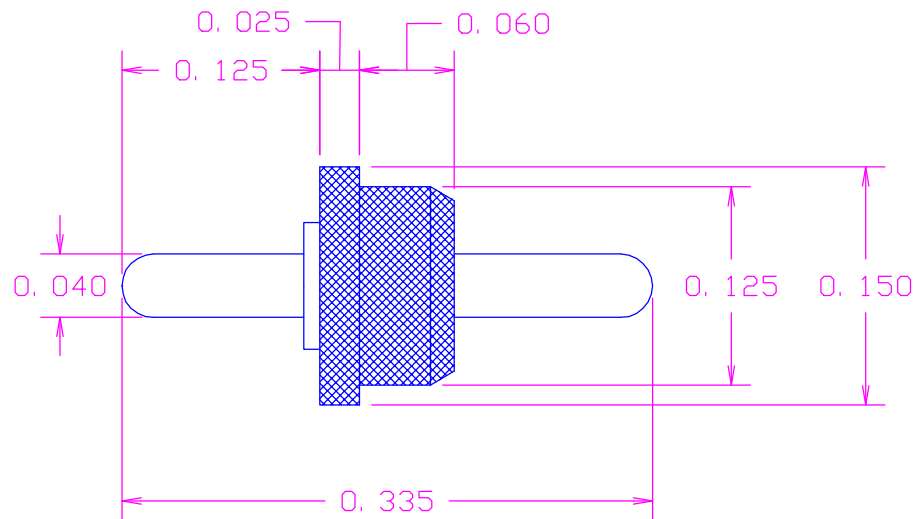


DATE	SYM	REVISION	RECORD	AUTH.	DR.	CK.
10/10/00	-	ISSUED			NT	DG

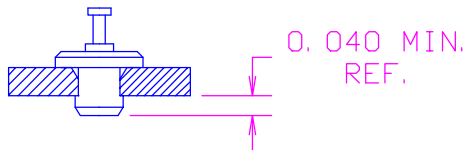

RECOMMENDED HOLE SIZE
FOR PRESS FIT INSERTION



MATERIAL: PIN- BRASS PER ASTM B16,
ALLOY C 36000, 1/2 HARD

BUSHING- PTFE PER ASTM D1710

COLOR(XX)-SEE COLOR CODE

FINISH: PIN- .0003"MIN. ELECTRO-SOLDER

PER MIL-P-81728, OVER .0001"MIN. COPPER

(XX)COLOR CODE:
10-BLACK
11-BROWN
12-RED
13-ORANGE
14-YELLOW
15-GREEN
16-BLUE
17-VIOLET
18-GRAY
19-WHITE(NATURAL)

FOR BOARD THICKNESS GREATER THAN .040, X=60°

FOR BOARD THICKNESS LESS THAN .040, X=80°

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD			ELECTRONICS CORPORATION	
DECIMAL + - .005	P/N		SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012	
FRACTIONAL + - 1/64	TITLE PTFE INSULATED TERMINAL				
ANGULAR + - 5°	DATE 10/6/00		DRAWING NUMBER 1110-07-05XX		