
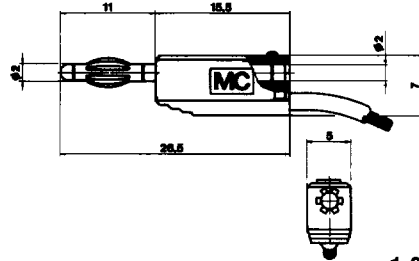


Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------

21.0300
21.1650 (Sil)
(7.5 cm)

LK 205
LK 205 Sil



1.2:1

Highly flexible patch cord with 2 mm (.080 in) dia. MC®-Multilam™ plugs and 2 mm (.080 in) dia. in-line socket. Plugs machined brass, gold plated with MC®-Multilam™. PVC or silicone insulated wire 0.5 mm² (20 AWG).

For operating temperature, see page 27.

Components for LK 205:

- Multilam™ plug LS 205 # 22.1004
- Insulator (polyamide) KT 205 # 22.2030
- Wire HK 0.5 PVC # 22.0010


21.0310
21.1660 (Sil)
(15 cm)

21.0320
21.1670 (Sil)
(30 cm)


21.0330
21.1680 (Sil)
(45 cm)

21.0340
21.1690 (Sil)
(60 cm)

LS 205



KT 205



1.2:1


Components for LK 205 Sil:

- Multilam™ plug LS 205 # 22.1004
- Insulator (polyamide) KT 205 # 22.2030
- Wire HK 0.5 Sil # 22.0090

Colors: • PVC: 0 - 9 • Sil: 1, 2, 4, 5, 6

21.0550
21.2950 (Sil)
(7.5 cm)

LK 205-A
LK 205-A Sil

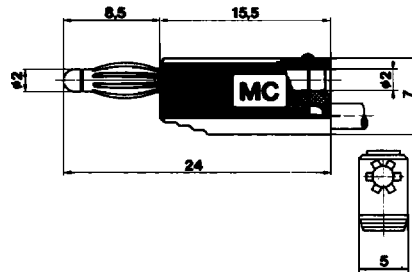

1.5:1

Highly flexible patch cord with 2 mm (.080 in) dia. MC®-Multilam™ plugs and 2 mm (.080 in) dia. in-line sockets. Plug length 8.5 mm (.335 in). Plugs machined brass, gold plated with MC®-Multilam™. PVC or silicone insulated wire 0.5 mm² (20 AWG).

For operating temperature, see page 27.

Components for LK 205-A:

- Multilam™ plug LS 205-A # 22.5014
- Insulator (polyamide) KT 205 # 22.2030
- Wire HK 0.5 PVC # 22.0010

21.0560
21.2960 (Sil)
(15 cm)

21.0570
21.2970 (Sil)
(30 cm)


21.0580
21.2980 (Sil)
(45 cm)

21.0590
21.2990 (Sil)
(60 cm)

LS 205-A



KT 205



1.5:1

Components for LK 205-A Sil:

- Multilam™ plug LS 205-A # 22.5014
- Insulator (polyamide) KT 205 # 22.2030
- Wire HK 0.5 Sil # 22.0090

Colors: • PVC: 0 - 9 • Sil: 1, 2, 4, 5, 6

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet