

4 Male Connectors with CAGE CLAMP®, Pin Spacing 7.5 mm / 0.295 in, Grey

62

Pin spacing 7.5 mm/0.295 in, grey
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3 | 300 V, 15 A
12 A

8 – 9 mm / 0.33 in

* VDE KCC N S CCA P NV

Pin spacing 7.5 mm/0.295 in, grey
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3 | 300 V, 15 A
12 A




8 – 9 mm / 0.33 in

* VDE KCC N S CCA P NV

Pin spacing 7.5 mm/0.295 in, grey
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3 | 300 V, 15 A
12 A

8 – 9 mm / 0.33 in

* VDE KCC N S CCA P NV

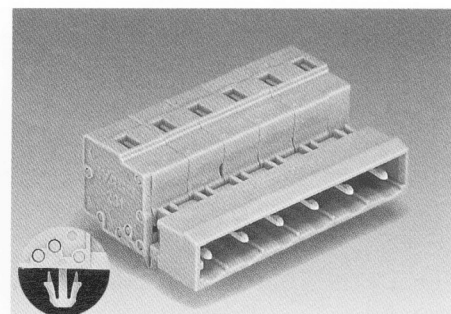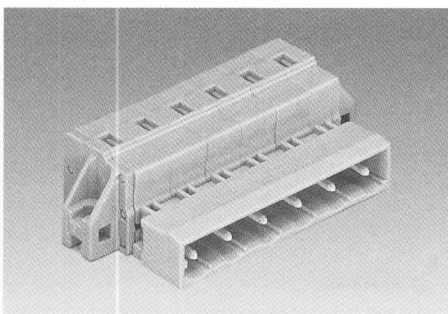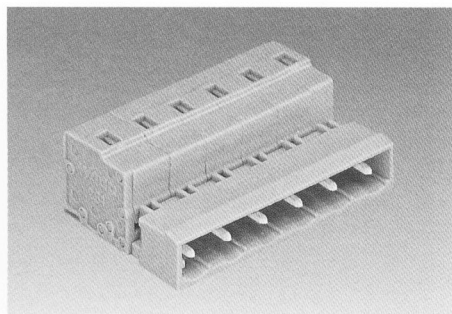


No. of poles	Item-No.	No. of poles	Item-No.	No. of poles	Item-No.
Male connectors with CAGE CLAMP®, grey		Male connectors with CAGE CLAMP® and fixing flanges, grey, for screw fixing or similar methods, for vertical or horizontal fixing		Male connectors with CAGE CLAMP® and snap-in mounting feet, grey, for plate thickness 0.6 mm – 1.2 mm, fixing hole Ø 3.5 mm (or with mounting adapter 209-137 for DIN 35 rail)	
2	731-602	2	731-602/019-000	2	731-602/018-000
3	731-603	3	731-603/019-000	3	731-603/018-000
4	731-604	4	731-604/019-000	4	731-604/018-000
5	731-605	5	731-605/019-000	5	731-605/018-000
6	731-606	6	731-606/019-000	6	731-606/018-000
7	731-607	7	731-607/019-000	7	731-607/018-000
8	731-608	8	731-608/019-000	8	731-608/018-000
9	731-609	9	731-609/019-000	9	731-609/018-000
10	731-610	10	731-610/019-000	10	731-610/018-000
11	731-611	11	731-611/019-000	11	731-611/018-000
12	731-612	12	731-612/019-000	12	731-612/018-000
16	731-616	16	731-616/019-000	16	731-616/018-000

Accessories (please refer to remarks concerning coding on page 4.83)

	Coding key , snap-on type, light grey 231-130		Coding key , snap-on type, light grey 231-130		Coding key , snap-on type, light grey 231-130
	Separator , for formation of groups, light grey 231-500		Separator , for formation of groups, light grey 231-500		Separator , for formation of groups, light grey 231-500
	Insulation stop , 5 pcs/strip 0.08 - 0.2 mm ² (white) 231-673 0.25 - 0.5 mm ² (light gr.) 231-674 0.75 - 1 mm ² (dark grey) 231-675		Tapping screw , B 2.2 x 9.5, fixing hole Ø 1.8 mm 209-147		Mounting adapter , for DIN 35 rail, grey 209-137
	Insulation stop , 5 pcs/strip 0.08 - 0.2 mm ² (white) 231-673 0.25 - 0.5 mm ² (light gr.) 231-674 0.75 - 1 mm ² (dark grey) 231-675		Insulation stop , 5 pcs/strip Description and item-Nos on the left		Insulation stop , 5 pcs/strip Description and item-Nos on the left
	Marker strips , self-adhesive 1-16 (20 x) 249-150/210-222		Marker strips , self-adhesive 1-16 (20 x) 249-150/210-222		Marker strips , self-adhesive 1-16 (20 x) 249-150/210-222

Dimensions (in mm) A = (No. of poles – 1) x pin spacing + 5 mm + 3.2 mm B = A – 1.7 mm C = A – 1.2 mm D = A – 0.2 mm E = D + 5.8 mm F = D + 11.8 mm

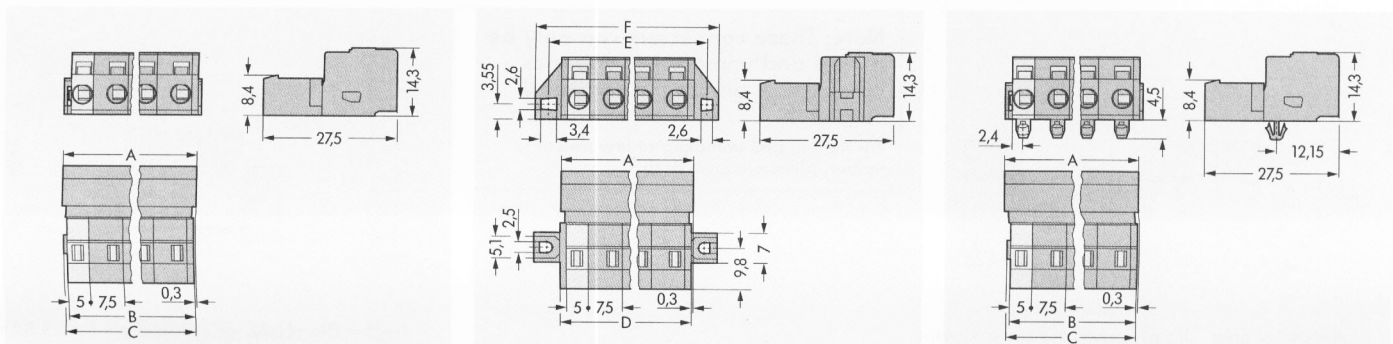

* For further approvals with corresponding ratings see pages 10.3 ff.