
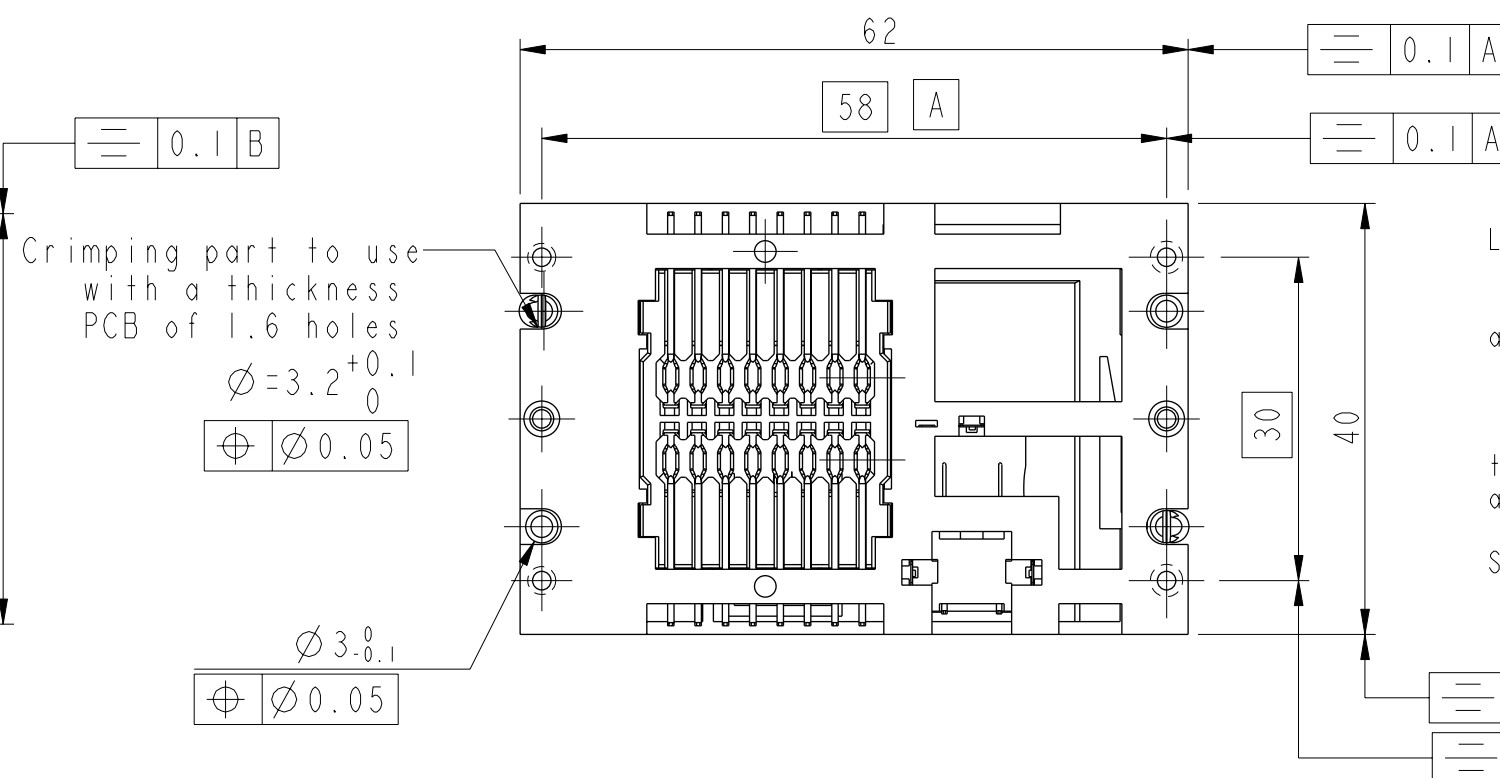
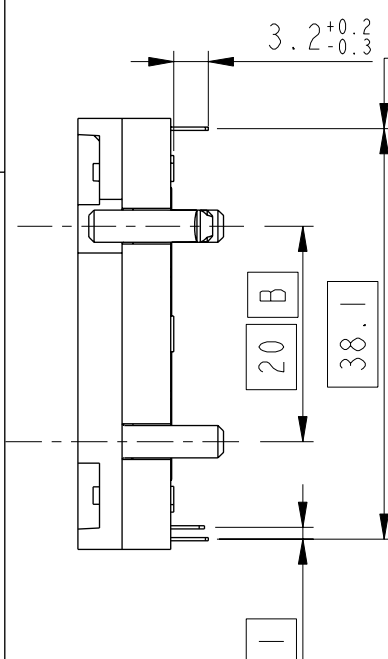
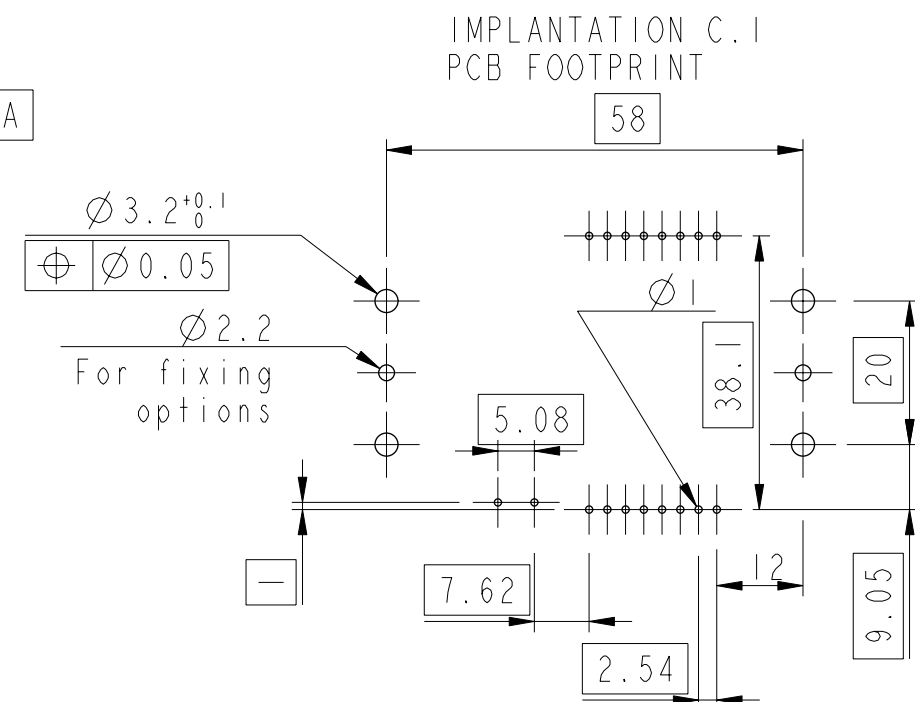


CATALOGUE NUMBER	LEAD FREE VERSION
7434L0835S01	7434L0835S01LF

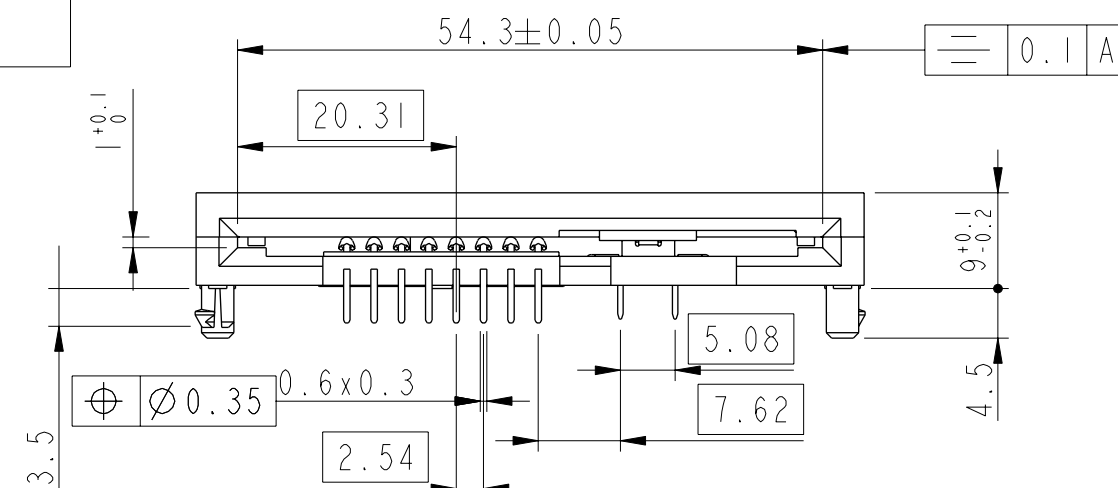

LEAD FREE VERSION:



"This product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 3-5seconds in a wave solder application with a 1.6mm minimum thick circuit board.

Sn Matte plating on solder tail for Lead Free Versions

Tol Gen: 0mm to 10mm ± 0.1 mm
 10mm to 30mm ± 0.15 mm
 30mm to 60mm ± 0.2 mm
 60mm and above ± 0.3 mm

rev	ecn no	dr	date
A	F20307	DLE	2002/04/2
B	105-0167	NT	2005/09/2
C	106-0084	SSC	2006/06/2
D	108-0080	SSC	2008/06/2
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface - 		tolerance std ISO: I302 ISO: 406 ISO: I10I		projection 		MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	D.LEGRAND	2002/04/29	ANGULAR	LINEAR	0.X	±	size A3	Scale 1:1		
Eng	F.TISSERAND	2002/04/29			0.XX	±				
Chr	S.S.CHERIAN	2008/06/28			0.XXX	±				
Appr	S.S.CHERIAN	2008/06/28	0°	±°	Product family SMARTCARD			ECN 108-0080 Spec ref -		
			title SMARTCARD ASSEMBLY L08-16 CONTACTS - 8 CONTACTS				dwg no VJWI2077		Rev. D	
catalog no			SFF TAB1F				sheet 1 of 1			