

6-Position Over 6-Position Stacked Receptacles, Thru-Hole

Material and Finish:

Housing — Thermoplastic, 94V-0 rated, black

Contacts — Copper alloy, duplex plated

A — .000030 [0.00076] gold min. in mating area, .000120 [0.00305] min. tin-lead on solder-tail, all over .000050 [0.00127] min. nickel underplating

Shield — Copper alloy, plated .000100 [0.00254] min. tin-lead over .000030 [0.00076] min. nickel


Technical Documents:

Product Specification
108-51010



Application Specification
114-51004

Notes:


1. Recommended pc board thickness is .062 [1.57].

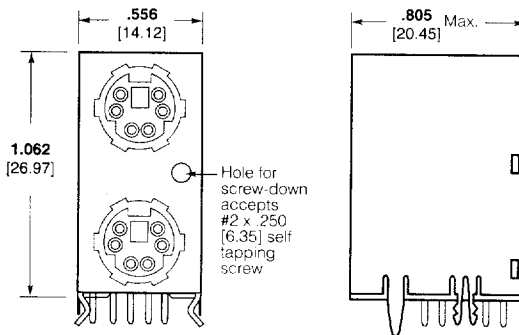

Part Number 786580-1

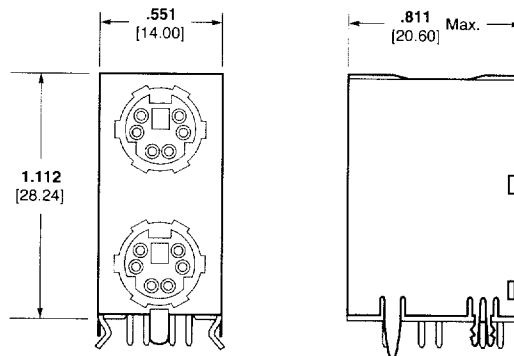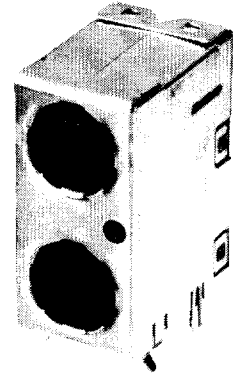

Part Number 84405-1

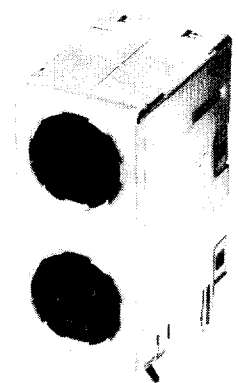

For complete product information, order Catalog 82212