

PANDUIT® Copper Standard Barrel Two-Hole Lugs (Type LCD)

Copper Lugs For Use With Copper Cables Only Two Hole Lug Standard Barrel Type LCD




- Color coded to show proper die number and color
- U.L. listed per 486A up to 35KV**
- Inspection window to visually assure full cable insertion
- ◆ NEMA hole sizes and spacing



Part Number	* Copper Conductor Size	* Locomotive Conductor Size	Code Cable Die Color & No.	Bolt Hole Size	Dimensions (In.)								Std. Pkg. Qty.	
					Barrel		A	W	G	S	C	T		B
					I.D.	O.D.								
LCD8-10A-L	#8 AWG or 23 Navy	37/24	Red 21	#10	.18	.27	1.88	.41	.23	.63	.31	.08	.56	50
LCD8-14A-L				1/4"	.18	.27	1.97	.48	.25	.63	.37	.07	.56	50
LCD8-14B-L				1/4"	.18	.27	2.09	.48	.25	.75	.37	.07	.56	50
LCD8-14D-L				1/4"	.18	.27	2.34	.48	.25	1.00	.37	.07	.56	50
LCD8-38D-L				3/8"	.18	.27	2.56	.62	.36	1.00	.48	.05	.56	50
LCD6-10A-L	#6 AWG or #6 Weld 30 Navy	61/24	Blue 24	#10	.22	.31	2.15	.46	.23	.63	.31	.08	.81	50
LCD6-14A-L				1/4"	.22	.31	2.24	.48	.25	.63	.37	.08	.81	50
LCD6-14B-L				1/4"	.22	.31	2.36	.48	.25	.75	.37	.08	.81	50
LCD6-14D-L				1/4"	.22	.31	2.61	.48	.25	1.00	.37	.08	.81	50
LCD6-56D-L				5/16"	.22	.31	2.73	.56	.32	1.00	.42	.07	.81	50
LCD6-38D-L	3/8"	.22	.31	2.83	.62	.36	1.00	.48	.06	.81	50			
LCD4-14A-L	#4 AWG or 40-50 Navy	105/24	Gray 29	1/4"	.28	.38	2.26	.55	.25	.63	.37	.09	.81	50
LCD4-14B-L				1/4"	.28	.38	2.38	.55	.25	.75	.37	.09	.81	50
LCD4-14D-L				1/4"	.28	.38	2.63	.55	.25	1.00	.37	.09	.81	50
LCD4-38D-L				3/8"	.28	.38	2.85	.62	.36	1.00	.48	.08	.81	50
LCD2-14A-Q	#2 AWG or 60 Navy	—	Brown 33	1/4"	.31	.42	2.40	.60	.25	.63	.38	.10	.88	25
LCD2-14B-Q				1/4"	.31	.42	2.52	.60	.25	.75	.38	.10	.88	25
LCD2-14D-Q				1/4"	.31	.42	2.77	.60	.25	1.00	.38	.10	.88	25
LCD2-56B-Q				5/16"	.31	.42	2.65	.66	.32	.75	.44	.10	.88	25
LCD2-38D-Q				3/8"	.31	.42	3.00	.66	.39	1.00	.47	.10	.88	25
LCD2-12-Q	1/2"	.31	.42	4.14	.75	.63	1.75	.63	.08	.88	25			
LCD1-14A-E	#1 AWG or #2 Weld 75 Navy	150/24	Green 37	1/4"	.36	.47	2.42	.70	.25	.63	.38	.11	.88	20
LCD1-14B-E				1/4"	.36	.47	2.54	.70	.25	.75	.38	.11	.88	20
LCD1-56C-E				5/16"	.36	.47	2.79	.70	.32	.88	.44	.11	.88	20
LCD1-38D-E				3/8"	.36	.47	2.99	.70	.36	1.00	.47	.11	.88	20
LCD1-12-E	1/2"	.36	.47	4.16	.75	.63	1.75	.63	.09	.88	20			
LCD1/0-14A-X	#1/0 AWG or #1 Weld 100 Navy	225/24	Pink 42	1/4"	.39	.52	2.57	.76	.32	.63	.38	.12	.94	10
LCD1/0-14B-X				1/4"	.39	.52	2.70	.76	.32	.75	.38	.12	.94	10
LCD1/0-56C-X				5/16"	.39	.52	2.88	.76	.32	.88	.44	.12	.94	10
LCD1/0-38D-X				3/8"	.39	.52	3.08	.76	.36	1.00	.47	.12	.94	10
LCD1/0-12-X	1/2"	.39	.52	4.25	.80	.63	1.75	.63	.12	.94	10			
LCD2/0-14A-X	#2/0 AWG or #1/0 Weld 125 Navy	275/24	Black 45	1/4"	.45	.58	2.71	.85	.35	.63	.43	.13	.98	10
LCD2/0-14B-X				1/4"	.45	.58	2.84	.85	.35	.75	.43	.13	.98	10
LCD2/0-56C-X				5/16"	.45	.58	2.96	.85	.35	.88	.43	.13	.98	10
LCD2/0-38D-X				3/8"	.45	.58	3.15	.85	.39	1.00	.45	.13	.98	10
LCD2/0-12-X	1/2"	.45	.58	4.31	.85	.63	1.75	.63	.13	.98	10			
LCD3/0-14B-X	#3/0 AWG or #2/0 Weld 150 Navy	325/24	Orange 50	1/4"	.51	.64	3.03	.96	.35	.75	.43	.13	1.14	10
LCD3/0-56D-X				5/16"	.51	.64	3.28	.96	.35	1.00	.43	.13	1.14	10
LCD3/0-38D-X				3/8"	.51	.64	3.34	.96	.39	1.00	.45	.13	1.14	10
LCD3/0-12-X	1/2"	.51	.64	4.50	.96	.63	1.75	.63	.13	1.14	10			
LCD4/0-14B-X	#4/0 AWG or #3/0 Weld 200 Navy	450/24	Purple 54	1/4"	.57	.71	3.11	1.06	.35	.75	.43	.14	1.19	10
LCD4/0-38D-X				3/8"	.57	.71	3.45	1.06	.39	1.00	.47	.14	1.19	10
LCD4/0-12-X				1/2"	.57	.71	4.58	1.06	.63	1.75	.63	.14	1.19	10
LCD250-38D-X	250 kcmil or #4/0 Weld 250 Navy	550/24	Yellow 62	3/8"	.63	.77	3.55	1.17	.39	1.00	.47	.14	1.25	10
LCD250-12-X				1/2"	.63	.77	4.69	1.17	.63	1.75	.63	.14	1.25	10
LCD300-38D-X	300 kcmil	—	White 66	3/8"	.65	.81	3.75	1.19	.38	1.00	.44	.16	1.44	10
LCD300-12-X				1/2"	.65	.81	4.93	1.19	.63	1.75	.63	.16	1.44	10
LCD350-14B-X	350 kcmil	650/24	Red 71	1/4"	.70	.88	3.31	1.28	.25	.75	.34	.17	1.44	10
LCD350-38D-X				3/8"	.70	.88	3.79	1.28	.38	1.00	.44	.17	1.44	10
LCD350-12E-X				1/2"	.70	.88	4.34	1.28	.50	1.25	.62	.17	1.44	10
LCD350-12-X	1/2"	.70	.88	4.97	1.28	.63	1.75	.63	.17	1.44	10			
LCD400-38D-6	400 kcmil	775/24	Blue 76	3/8"	.76	.95	3.87	1.39	.38	1.00	.44	.18	1.50	6
LCD400-12-6				1/2"	.76	.95	5.05	1.39	.63	1.75	.63	.18	1.50	6
LCD500-14B-6	500 kcmil	925/24	Brown 87	1/4"	.84	1.06	3.72	1.54	.25	.75	.34	.22	1.75	6
LCD500-38D-6				3/8"	.84	1.06	4.20	1.54	.38	1.00	.44	.22	1.75	6
LCD500-12E-6				1.2"	.84	1.06	4.75	1.54	.50	1.25	.62	.22	1.75	6
LCD500-12-6				1/2"	.84	1.06	5.38	1.54	.63	1.75	.63	.22	1.75	6
LCD600-38D-6	600 kcmil	1100/24	Green 94	3/8"	.92	1.19	4.25	1.70	.38	1.00	.44	.26	1.75	6
LCD600-12-6				1/2"	.92	1.19	5.43	1.70	.63	1.75	.63	.26	1.75	6
LCD750-12-6	750 kcmil	1325/24	Black 106	1/2"	1.03	1.30	6.00	1.90	.63	1.75	.63	.26	1.88	6
LCD1000-12-3	1000 kcmil	1925/24	White 125	1/2"	1.17	1.50	6.16	2.16	.63	1.75	.63	.32	1.88	3

*UL LISTED and CSA CERTIFIED with code, locomotive and class K & M weld cables.

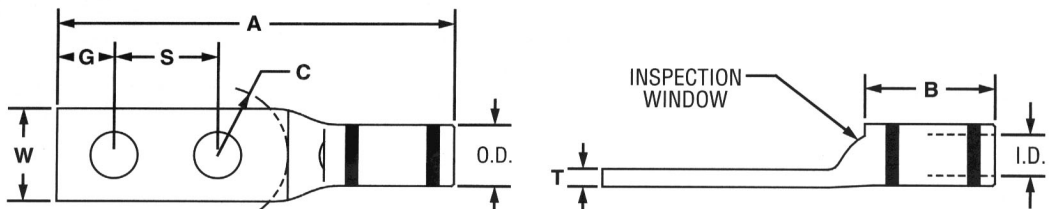

**Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. See tool chart on page 74-75 for additional information. Order the number of pieces required in multiples of standard package quantity. 3 = 3 pcs., 6 = 6 pcs., X = 10 pcs., E = 20 pcs., Q = 25 pcs., and L = 50 pcs.