


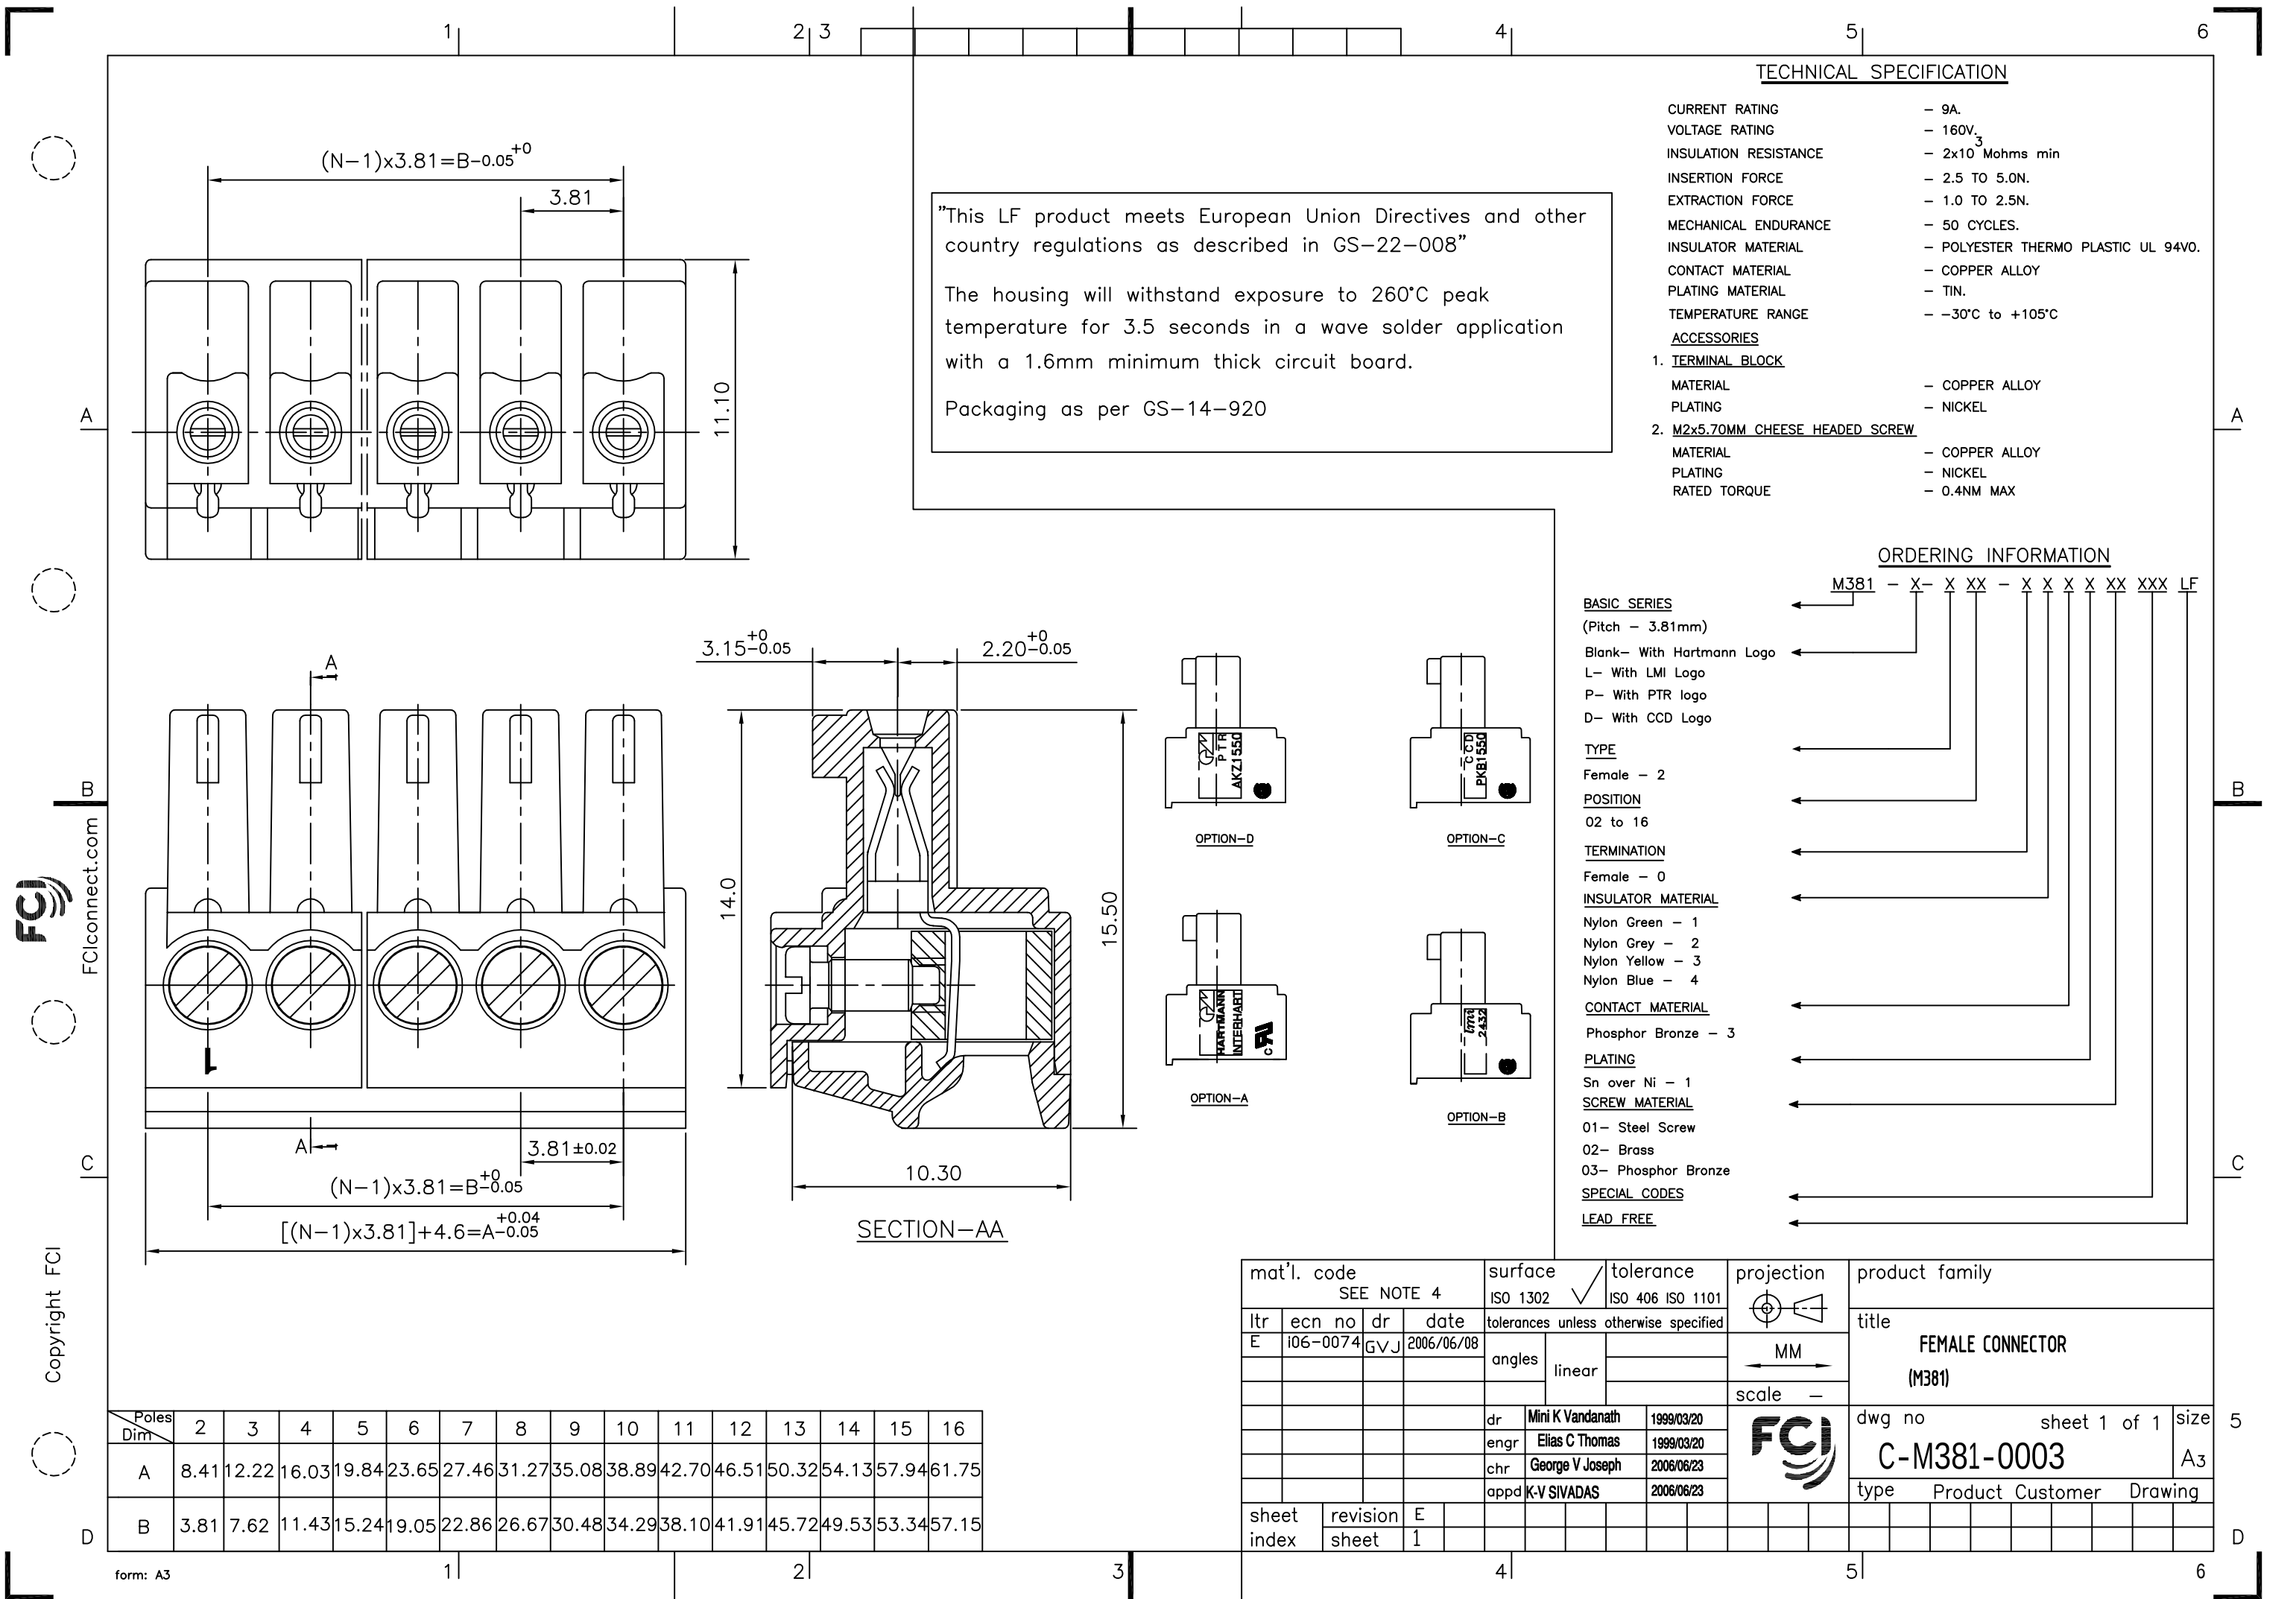

"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board.

Packaging as per GS-14-920

mat'l. code SEE NOTE 4				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title FEMALE CONNECTOR (M381)			
E	106-0074	GVJ	2006/06/08	angles	linear					
						MM				
						scale -				
				dr	Mini K Vandanath	1999/03/20			dwg no	sheet 1 of 1
				enr	Elias C Thomas	1999/03/20			C-M381-0003	size
				chr	George V Joseph	2006/06/23				
				appd	K-V SIVADAS	2006/06/23				
sheet index	revision	E	1					type	Product Customer	Drawing

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Dim															
A	8.41	12.22	16.03	19.84	23.65	27.46	31.27	35.08	38.89	42.70	46.51	50.32	54.13	57.94	61.75
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72	49.53	53.34	57.15